



Connectors > Connector Accessories > Connector Hardware



Hardware Accessory Function: **Latching, Locking & Retention**

Connector Hardware Accessory Type: **Double Lock Plate**

Operating Temperature (Max): **105 °C [221 °F]**

Operating Temperature Range: **-30 – 105 °C [-22 – 221 °F]**

Features

Product Type Features

Hardware Accessory Function	Latching, Locking & Retention
Connector Hardware Accessory Type	Double Lock Plate

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241)

Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 917686-1
2.5 SIGNAL D/LOCK PLUG HSG 2P




TE Part # 2005543-5
BLOWER MOTOR 3P DBL YEL

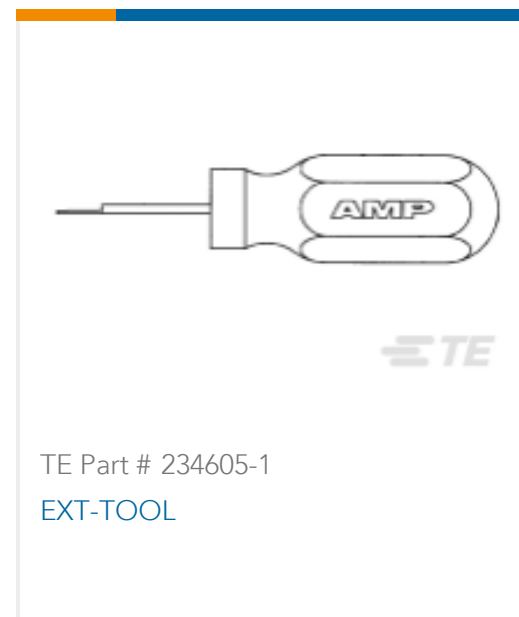


TE Part # 234605-1
EXT-TOOL


Also in the Series | AMP Signal Double Lock

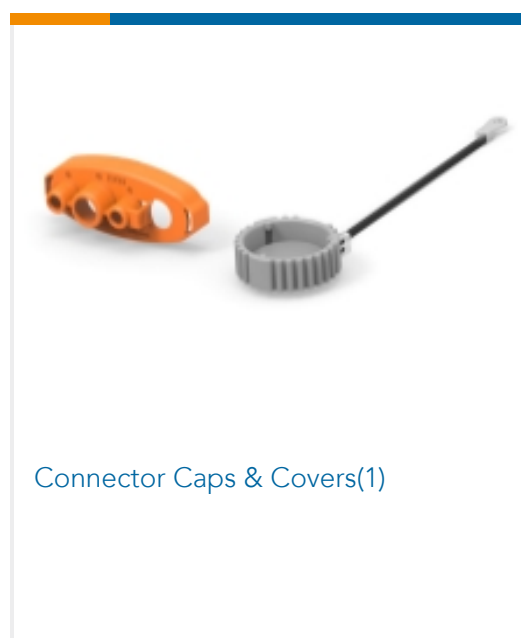


Connector Caps & Covers(1)

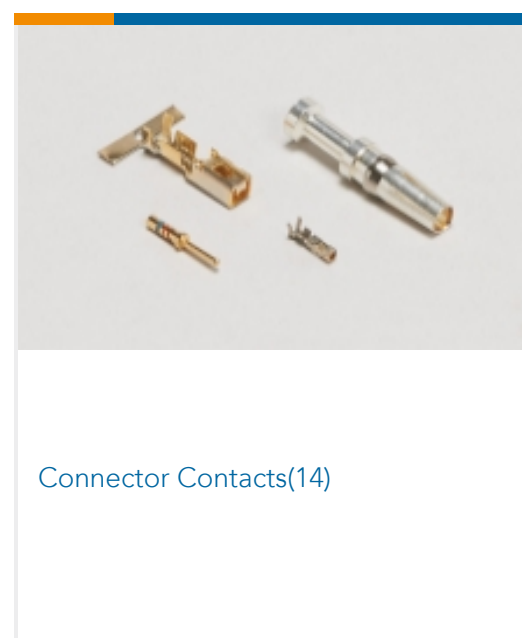

Connector Contacts(14)

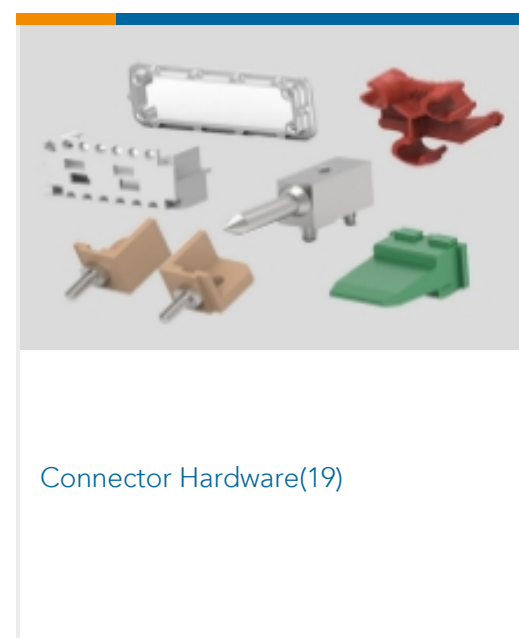


Connector Hardware(19)

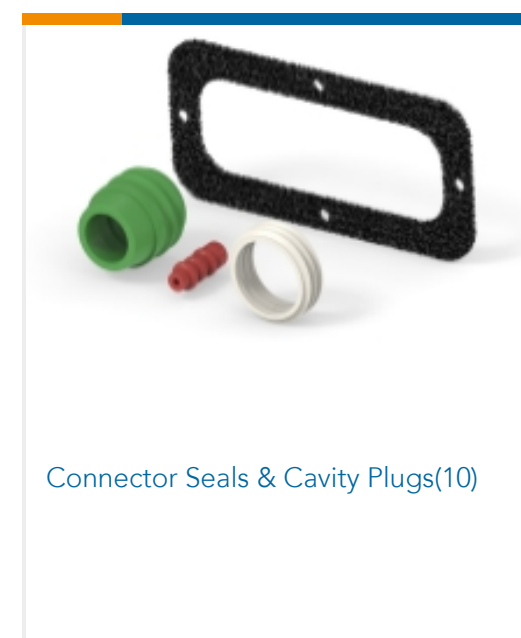

Connector Seals & Cavity Plugs(10)



Insertion & Extraction Tools(1)

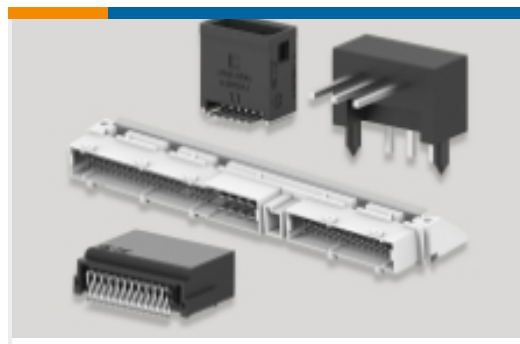

PCB Headers & Receptacles(144)



Rectangular Connector Housings(23)



Rectangular Power Connectors(3)



Standard Rectangular Connectors(1)



Wire-to-Board Connector Assemblies & Housings(76)

Customers Also Bought



TE Part #1565080-1
GRACE INERTIA 3.5 TAB CONTACT(L)




TE Part #170325-5
187 PL MKII REC. 20-16AWG PTBR



TE Part #1871570-1
GIC 3.3 PLUG HOUSING 12POS



TE Part #5-1376387-1
5.0 POWER KEY CONNECTOR 6P (2R)

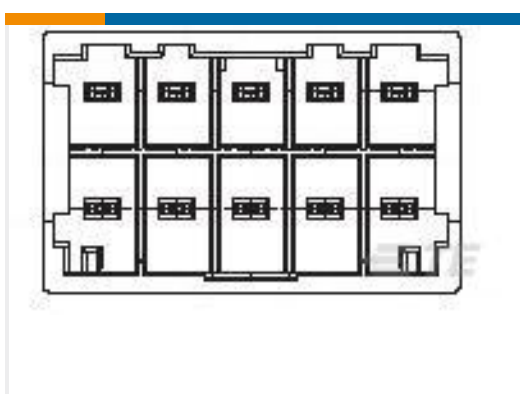

TE Part #1939983-1
GIC3.3 HDR ASS'Y 10POS 2ROW



TE Part #1827393-1
GIC 3.3 HDR ASSY 8P



TE Part #5-1565085-1
GRACE INERTIA CONNECTOR 3.5W
2POS CAP



TE Part #5-1565088-1
GRACE INERTIA CONNECTOR 3.5W
6POS CAP

Documents

[CAD Files](#)

[3D PDF](#)

[3D](#)

[Customer View Model](#)

[ENG_CVM_CVM_5-917698-1_G.2d_dxf.zip](#)

English

[Customer View Model](#)

[ENG_CVM_CVM_5-917698-1_G.3d_igs.zip](#)



English

Customer View Model

[ENG_CVM_CVM_5-917698-1_G.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG](#)

English

Product Specifications

[Application Specification](#)

English