SIEMENS

Data sheet 3RW5548-2HA06



SIRIUS soft starter 200-690 V 570 A, 24 V AC/DC spring-type terminals





product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW55
manufacturer's article number	
 of high feature HMI module usable 	3RW5980-0HF00
• of communication module PROFINET standard usable	3RW5980-0CS00
• of communication module PROFINET high-feature usable	3RW5950-0CH00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2580-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 500 V 	3VA2580-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
• of circuit breaker usable at 400 V at inside-delta circuit	3VA2510-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
• of circuit breaker usable at 500 V at inside-delta circuit	3VA2510-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of the gG fuse usable up to 690 V 	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
• of the gG fuse usable at inside-delta circuit up to 500 V	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1437-2; Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NC3342-1U; Type of coordination 2, Iq = 65 kA
General technical data	
starting voltage [%]	20 100 %

General technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s
number of parameter sets	3
accuracy class	5 (based on IEC 61557-12)
certificate of suitability	
CE marking	Yes
• III approval	Yes

CSA approval	Yes
product component	
HMI-High Feature	Yes
• is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
buffering time in the event of power failure	10 33 /0
• for main current circuit	100 ms
for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	690 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	8 kV
blocking voltage of the thyristor maximum	1 800 V
service factor	1.15
	8 kV
surge voltage resistance rated value maximum permissible voltage for protective separation	U KV
between main and auxiliary circuit	690 V; does not apply for thermistor connection
shock resistance	· · ·
	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
recovery time after overload trip adjustable	60 1 800 s AC 53a
utilization category according to IEC 60947-4-2	
reference code according to IEC 81346-2	Q 2014519242
Substance Prohibitance (Date) SVHC substance name	02/15/2018 Lead - 7439-92-1
Oviic substance name	Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5 Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4 Lead titanium trioxide - 12060-00-3
product function	
ramp-up (soft starting)	Yes
ramp-down (soft stop)	Yes
 breakaway pulse 	Yes
adjustable current limitation	Yes
 creep speed in both directions of rotation 	Yes
pump ramp down	Yes
DC braking	Yes
motor heating	Yes
min/max pointer	Yes
trace function	Yes
intrinsic device protection	Yes
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)
evaluation of thermistor motor protection	Yes; Type A PTC or Klixon / Thermoclick
inside-delta circuit	Yes; Only up to 600 V operating voltage
• auto-RESET	Yes
manual RESET	Yes
• remote reset	Yes
communication function	Yes
 operating measured value display 	Yes
• event list	Yes
• error logbook	Yes
 via software parameterizable 	Yes
 via software configurable 	Yes
screw terminal	No
spring-loaded terminal	Yes
PROFlenergy	Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules
firmware update	Yes
 removable terminal for control circuit 	Yes
voltage ramp	Yes

torque control	Yes
 combined braking 	Yes
 analog output 	Yes; 4 20 mA (default) / 0 10 V
 programmable control inputs/outputs 	Yes
 condition monitoring 	Yes
 automatic parameterisation 	Yes
application wizards	Yes
alternative run-down	Yes
emergency operation mode	Yes
• reversing operation	Yes
 soft starting at heavy starting conditions 	Yes
Power Electronics	
operational current	
at 40 °C rated value	570 A
at 40 °C rated value minimum	114 A
at 40 °C rated value at 50 °C rated value	504 A
at 60 °C rated value	460 A
operational current at inside-delta circuit	097 Λ
• at 40 °C rated value	987 A
• at 50 °C rated value	873 A
• at 60 °C rated value	796 A
operating voltage	200
• rated value	200 690 V
at inside-delta circuit rated value	200 600 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at inside-delta circuit	-15 %
relative positive tolerance of the operating voltage at inside-delta circuit	10 %
operating power for 3-phase motors	
 at 230 V at 40 °C rated value 	160 kW
 at 230 V at inside-delta circuit at 40 °C rated value 	315 kW
 at 400 V at 40 °C rated value 	315 kW
• at 400 V at inside-delta circuit at 40 °C rated value	560 kW
 at 500 V at 40 °C rated value 	355 kW
 at 500 V at inside-delta circuit at 40 °C rated value 	630 kW
at 690 V at 40 °C rated value	560 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
Operating frequency 2 rated value relative negative tolerance of the operating frequency	60 Hz -10 %
relative negative tolerance of the operating frequency	-10 %
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency	-10 % 10 %
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%]	-10 %
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC	-10 % 10 % 10 %; Relative to set le
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup	-10 % 10 % 10 %; Relative to set le
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup	-10 % 10 % 10 %; Relative to set le 171 W 151 W
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup	-10 % 10 % 10 %; Relative to set le
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 %	-10 % 10 % 10 %; Relative to set le 171 W 151 W 141 W
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup	-10 % 10 % 10 %; Relative to set le 171 W 151 W 141 W
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup	-10 % 10 % 10 %; Relative to set le 171 W 151 W 141 W 10 229 W 8 488 W
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup	-10 % 10 % 10 %; Relative to set le 171 W 151 W 141 W 10 229 W 8 488 W 7 651 W
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection	-10 % 10 %; Relative to set le 171 W 151 W 141 W 10 229 W 8 488 W
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup o at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control	-10 % 10 %; Relative to set le 171 W 151 W 141 W 10 229 W 8 488 W 7 651 W Electronic, tripping in the event of thermal overload of the motor
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage	-10 % 10 % 10 %; Relative to set le 171 W 151 W 141 W 10 229 W 8 488 W 7 651 W
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC	-10 % 10 %; Relative to set le 171 W 151 W 141 W 10 229 W 8 488 W 7 651 W Electronic, tripping in the event of thermal overload of the motor
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 50 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz rated value	-10 % 10 %; Relative to set le 171 W 151 W 141 W 10 229 W 8 488 W 7 651 W Electronic, tripping in the event of thermal overload of the motor AC/DC
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value	-10 % 10 %; Relative to set le 171 W 151 W 141 W 10 229 W 8 488 W 7 651 W Electronic, tripping in the event of thermal overload of the motor AC/DC 24 V 24 V
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 50 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz rated value	-10 % 10 %; Relative to set le 171 W 151 W 141 W 10 229 W 8 488 W 7 651 W Electronic, tripping in the event of thermal overload of the motor
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value relative negative tolerance of the control supply voltage at	-10 % 10 %; Relative to set le 171 W 151 W 141 W 10 229 W 8 488 W 7 651 W Electronic, tripping in the event of thermal overload of the motor AC/DC 24 V 24 V
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz rated value relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at	-10 % 10 %; Relative to set le 171 W 151 W 141 W 10 229 W 8 488 W 7 651 W Electronic, tripping in the event of thermal overload of the motor AC/DC 24 V 24 V -20 %

AO -4 00 H-	
AC at 60 Hz	20.0/
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply voltage at DC • rated value	24 V
relative negative tolerance of the control supply voltage at DC	-20 %
relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	440 mA
holding current in bypass operation rated value	720 mA
inrush current by closing the bypass contacts maximum	6.7 A
inrush current peak at application of control supply voltage maximum	7.5 A
duration of inrush current peak at application of control supply voltage	20 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	4
parameterizable	4
 number of digital outputs 	4
 number of digital outputs parameterizable 	3
number of digital outputs not parameterizable	1
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
at DC-13 at 24 V rated value	1 A
Installation/ mounting/ dimensions	
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	393 mm
width	210 mm
depth	203 mm
required spacing with side-by-side mounting	10 mm
• forwards	10 mm
backwards Upwards	0 mm 100 mm
upwardsdownwards	100 mm 75 mm
at the side	75 mm 5 mm
at the side weight without packaging	5 mm 10.9 kg
Connections/ Terminals	10.0 mg
type of electrical connection	
for main current circuit	busbar connection
• for control circuit	spring-loaded terminals
width of connection bar maximum	45 mm
wire length for thermistor connection	
with conductor cross-section = 0.5 mm² maximum	50 m
with conductor cross-section = 1.5 mm² maximum	150 m
with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	
for DIN cable lug for main contacts stranded	2x (50 240 mm²)
for DIN cable lug for main contacts stranded	2x (70 240 mm²)
type of connectable conductor cross-sections	
The or commodation conductor cross-sections	

 for control circuit solid 	2x (0.25 1.5 mm²)
 for control circuit finely stranded with core end processing 	2x (0.25 1.5 mm²)
 for AWG cables for control circuit solid 	2x (24 16)
 for AWG cables for control circuit finely stranded with core end processing 	2x (24 16)
wire length	
 between soft starter and motor maximum 	800 m
at the digital inputs at DC maximum	1 000 m
tightening torque	
 for main contacts with screw-type terminals 	14 24 N·m
 for auxiliary and control contacts with screw-type terminals 	0.8 1.2 N·m
tightening torque [lbf·in]	
for main contacts with screw-type terminals	124 210 lbf·in
for auxiliary and control contacts with screw-type	7 10.3 lbf·in
terminals	7 10.0 IST III
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m; Derating as of 1000 m, see catalog
ambient temperature	
 during operation 	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
during storage and transport	-40 +80 °C
environmental category	
 during operation according to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
 during storage according to IEC 60721 	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
during transport according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
Environmental footprint	
Siemens Eco Profile (SEP)	Siemens EcoTech
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
PROFINET standard	Yes
PROFINET high-feature	Yes
• EtherNet/IP	Yes
Modbus RTU	Yes
Modbus TCP PROSIDUO	Yes
PROFIBUS III (CSA refines	Yes
UL/CSA ratings	
manufacturer's article number • of the fuse	
usable for Standard Faults up to 575/600 V according to UL	Type: Class J / L, max. 1600 A; Iq = 30 kA
usable for High Faults up to 575/600 V according to UL	Type: Class J / L, max. 1200 A; Iq = 100 kA
usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class J / L, max. 1600 A; Iq = 30 kA
usable for High Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class J / L, max. 1200 A; Iq = 100 kA
operating power [hp] for 3-phase motors	
• at 200/208 V at 50 °C rated value	150 hp
• at 220/230 V at 50 °C rated value	200 hp
 at 460/480 V at 50 °C rated value 	400 hp
• at 575/600 V at 50 °C rated value	500 hp
• at 200/208 V at inside-delta circuit at 50 °C rated value	300 hp
• at 220/230 V at inside-delta circuit at 50 °C rated value	350 hp
• at 460/480 V at inside-delta circuit at 50 °C rated value	750 hp
• at 575/600 V at inside-delta circuit at 50 °C rated value	950 hp
contact rating of auxiliary contacts according to UL	R300-B300
Electrical Safety	
protection class IP on the front according to IEC 60529	IP00; IP20 with cover
touch protection on the front according to IEC 60529 ATEX	finger-safe, for vertical contact from the front with cover

Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1
PFHD with high demand rate according to IEC 61508 relating to ATEX	5E-7 1/h
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.008
hardware fault tolerance according to IEC 61508 relating to ATEX	0
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a
certificate of suitability	
• ATEX	Yes
• IECEx	Yes
 according to ATEX directive 2014/34/EU 	BVS 18 ATEX F 003 X
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]

Approvals Certificates

General Product Approval





Confirmation







EMV

For use in hazardous locations

Test Certificates

Marine / Shipping



<u>KC</u>





Type Test Certificates/Test Report



Marine / Shipping





Confirmation

other



Environment

Siemens EcoTech



Environment

Environmental Confirmations

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5548-2HA06

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RW5548-2HA06}$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RW5548-2HA06

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5548-2HA06&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5548-2HA06/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5548-2HA06&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

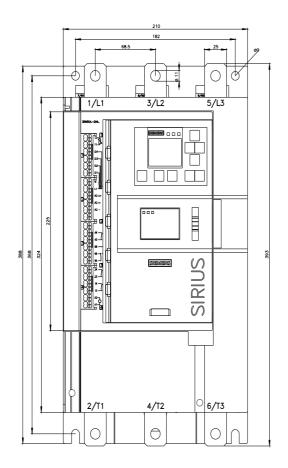

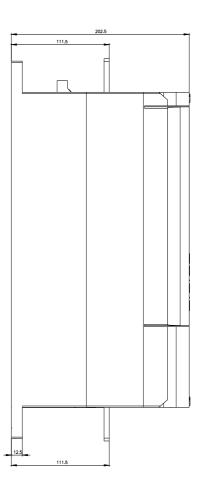

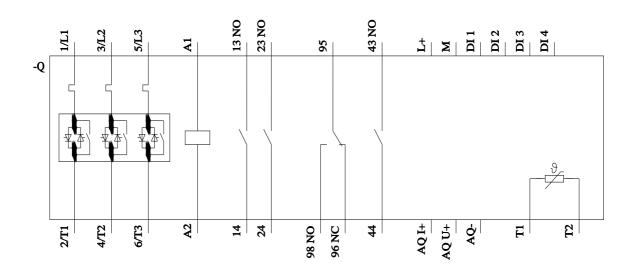

last modified: 6/6/2024 🖸

