


MALE SMA-UMP HIGHT 3 LOCK

R285.025.401

20 CM CABLE 2.6/50 S-BR

Series : **CORD-STD**

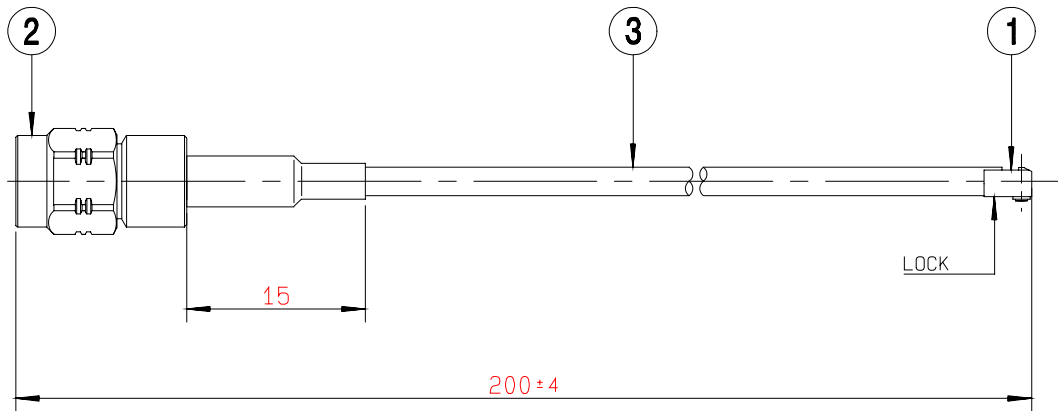

PACKAGING		
Standard	Unit	Other
20	'W' option	Contact us

- * 1 * Connector A : **R107.301.200**
 - * 2 * Connector B : **R124.071.123**
 - * 3 * Cable : **C291.170.017**
- Type : **CAB HF 2.6/50 KX 22A MARRON**

ELECTRICAL CHARACTERISTICS

Impedance	50 Ω
Frequency	0-3 GHz
Operating temperature	-40/+90 ° C
VSWR	TBD + 0.000 x F(GHz) Maxi
Insertion loss	TBD √F(GHz) dB Maxi
Voltage rating	100 Veff Maxi
Dielectric withstanding voltage	350 Veff mini
Insulation resistance	1000 MΩ mini

SPECIFICATION

Weight	7.100 g
Cable retention	20 N mini
Others :	



Edition : 0315 A

Design changes may be in order to improve the product.