

### International DIN standards; Solderless Connection Series (Fine Fit)

- Backplane systems can be designed with ease with XC5 Connectors as conforming with DIN standards.
- Using unique W-shaped pins, these Connectors prevent contacts from being bent or falling out. Ensures highly reliable connections.
- Less damage to the through-holes in circuit boards.
- Uses highly-reliable Twin-contact Sockets.
- A special Press-fit Tool is available.
- See the "Standards certification / conformity list" for information on conformity to certification standards.

#### RoHS Compliant


### ■ Ratings and Characteristics

Rated current	2 A
Rated voltage	300 VAC
Contact resistance	20 mΩ max. (at 20 mV, 100 mA max.)
Insulation resistance	10 <sup>6</sup> MΩ min. (at 100 VDC)
Dielectric strength	1,000 VAC for 1 min (leakage current: 1 mA min.)
Total insertion force	0.59 N max. per contact
Removal force	0.15 N min. (with test gauge, t = 0.56 mm)
Insertion durability	200 times
Ambient operating temperature	-55 to 125°C (with no icing at low temperature)

### ■ Materials and Finish

Type	Plugs	Sockets
Housings	Fiber-glass reinforced PBT resin (UL94 V-0)/gray	
Contacts (See note.)	Mating end	Copper alloy/nickel base, 0.4-μm gold plating
	Fine fit	Copper alloy/nickel base, gold flash plating
	Terminal	Copper alloy/nickel base, 0.15-μm gold plating (See note.)

**Note:** For non-standard plating specifications, contact your OMRON representative.

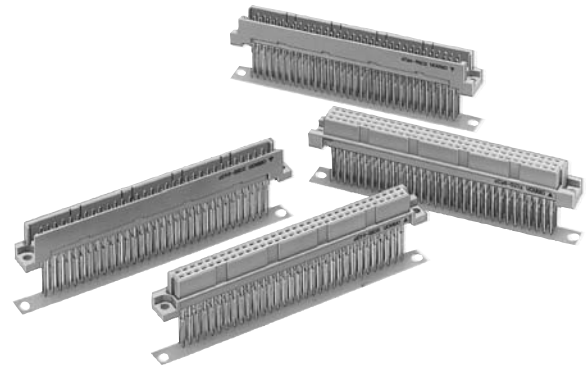

### ■ Applicable Wrap Post Wire Sizes

AWG30, AWG28, AWG26, or AWG24  
(Solid wire: 0.25 to 0.51 mm dia.)

### ■ Wrap Post Length

3 wires for the 13-mm contacts  
4 wires for the 17-mm contacts

### ■ Ratings for Fine-fit Connectors

Rated current	2 A
Contact resistance	5 mΩ max. (at 20 mV, 100 mA max.)
Pressure input	196 N max. per contact
Holding force	44.1 N min.
Unit torque durability	0.022 N-m min.
Vibration	At 10 to 2,000 Hz, 1.52-mm amplitude, or 147 m/s <sup>2</sup> will not interrupt current for more than 1 μ sec.
Shock	At 980 m/s <sup>2</sup> , will not break current for more than 1 μ sec.

### ■ Applicable Fine-fit Boards

- Width 1.6 to 3.2 mm
- Through-hole diameter 1.0 ±0.08 mm (Drill diameter 1.15 ±0.05 mm)  
Plating: Copper 25 mm min., or solder 5 mm min. on a copper base at least 25 mm thick.
- Pitch error: ±0.03 mm max.


# XC5B Double-row Sockets, DIN B-type, Fine-fit

## ■ Dimensions

(unit: mm)

XC5B-□□2P-11□□

(With straight terminals)

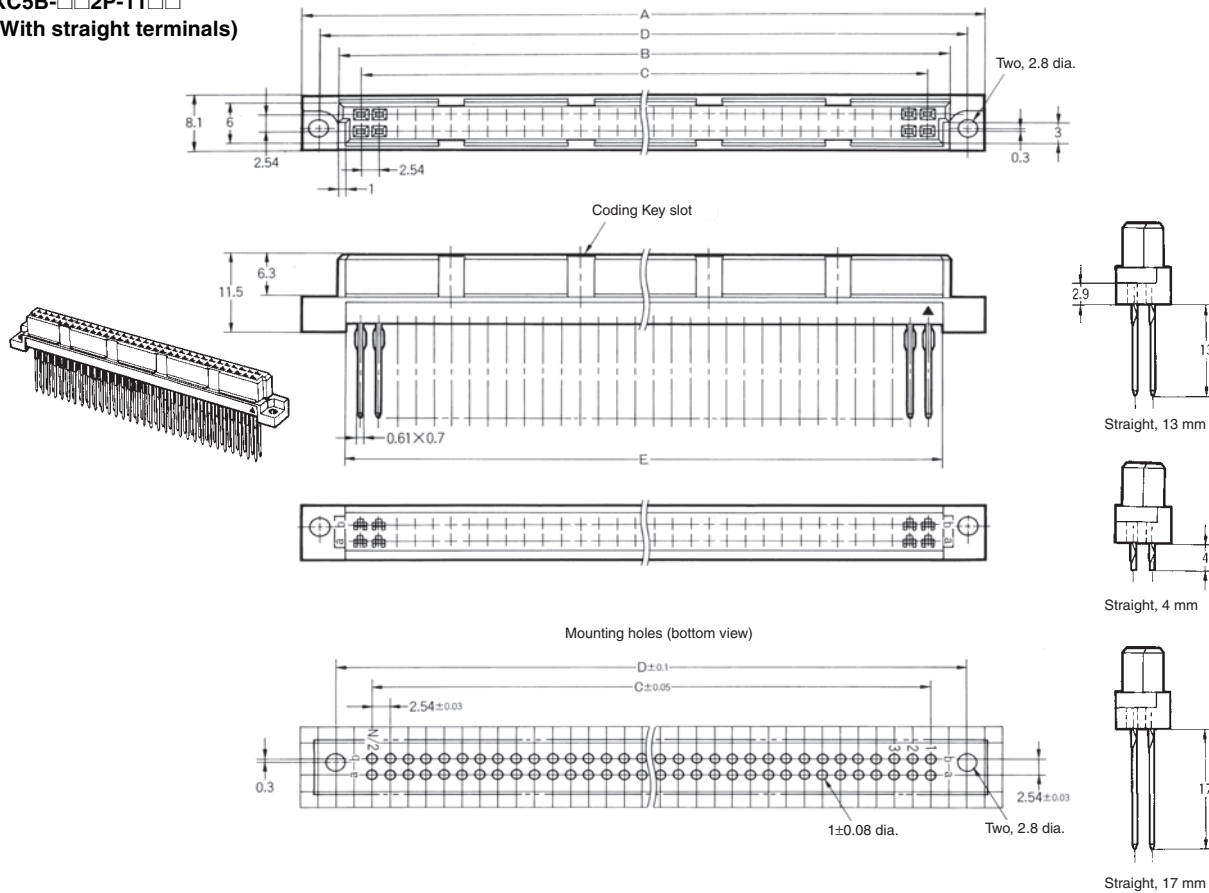

### Dimensions

No. of contacts	Dimensions (mm)					Coding Key slot positions (contact No.)
	A	B	C	D	E	
32	54.2	44.4	38.10	49.36	42.3	5, 12
64	94.8	85.0	78.74	90.00	82.9	6, 13, 20, 27
100	140.5	130.7	124.46	135.72	128.7	10, 20, 31, 41

## ■ Ordering Information


No. of contacts	Terminal type		
	Straight terminals, 4 mm	Straight terminals, 13 mm	Straight terminals, 17 mm
32	XC5B-322P-1140	XC5B-322P-1131	XC5B-322P-1132
64	XC5B-642P-1140	XC5B-642P-1131	XC5B-642P-1132

# XC5E Double-row Plugs, DIN Q-type, Fine-fit

## Dimensions

(unit: mm)

XC5E-□□2P-11□□  
(With straight terminals)

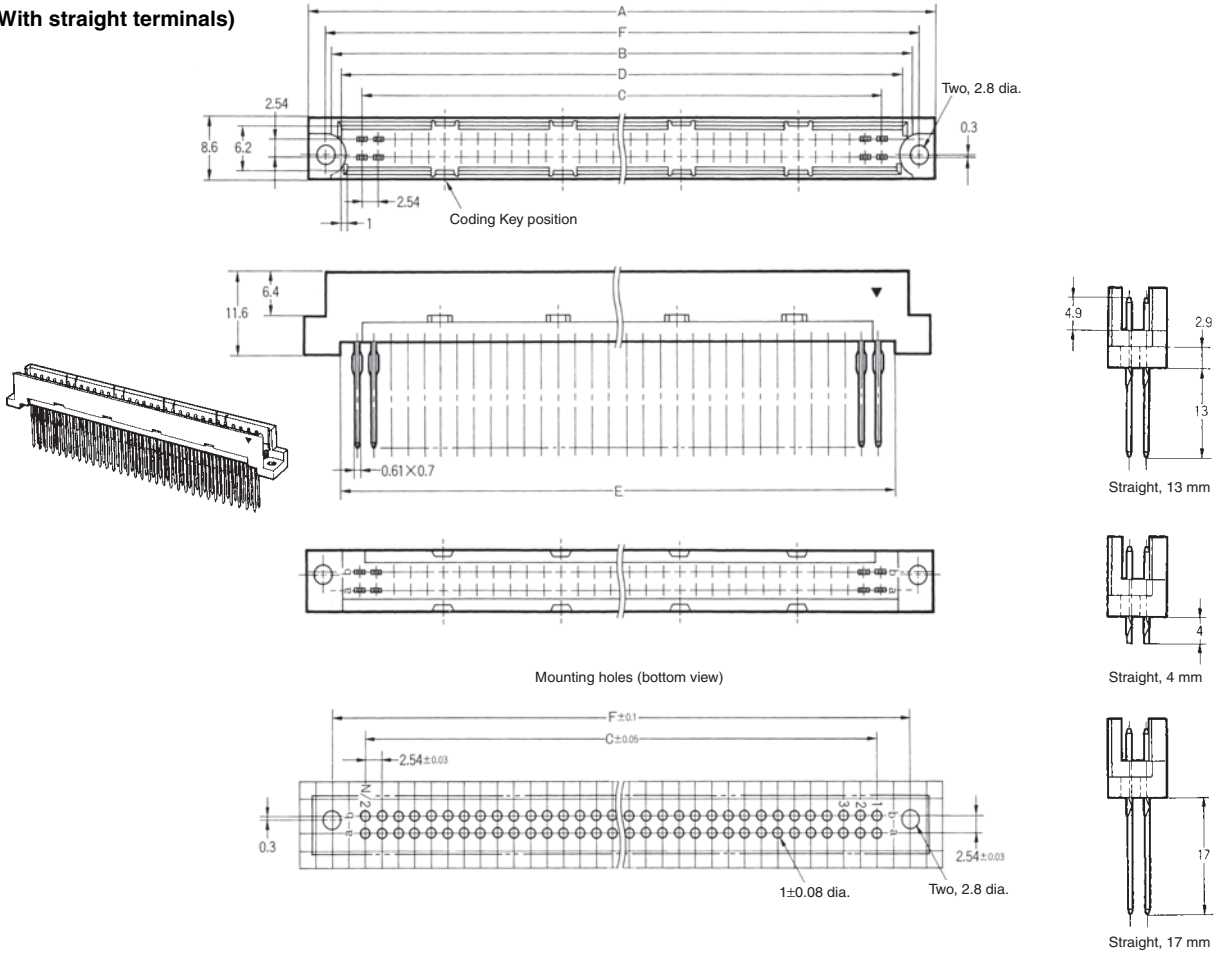

### Dimensions

No. of contacts	Dimensions (mm)						Coding Key positions (contact No.)
	A	B	C	D	E	F	
32	54.2	47.4	38.10	44.6	43.3	49.36	5, 12
64	94.8	88.0	78.74	85.2	83.9	90.00	6, 13, 20, 27
100	140.5	133.7	124.46	130.9	129.7	135.72	10, 20, 31, 41

## Ordering Information

Appearance			
No. of contacts	Terminal type		
	Straight terminals, 4 mm	Straight terminals, 13 mm	Straight terminals, 17 mm
32	XC5E-322P-1140	XC5E-322P-1131	XC5E-322P-1132
64	XC5E-642P-1140	XC5E-642P-1131	XC5E-642P-1132


# XC5D Triple-row Sockets, DIN C-type, Fine-fit

## ■ Dimensions

(unit: mm)

XC5D-□□2P-11□□

(With straight terminals)

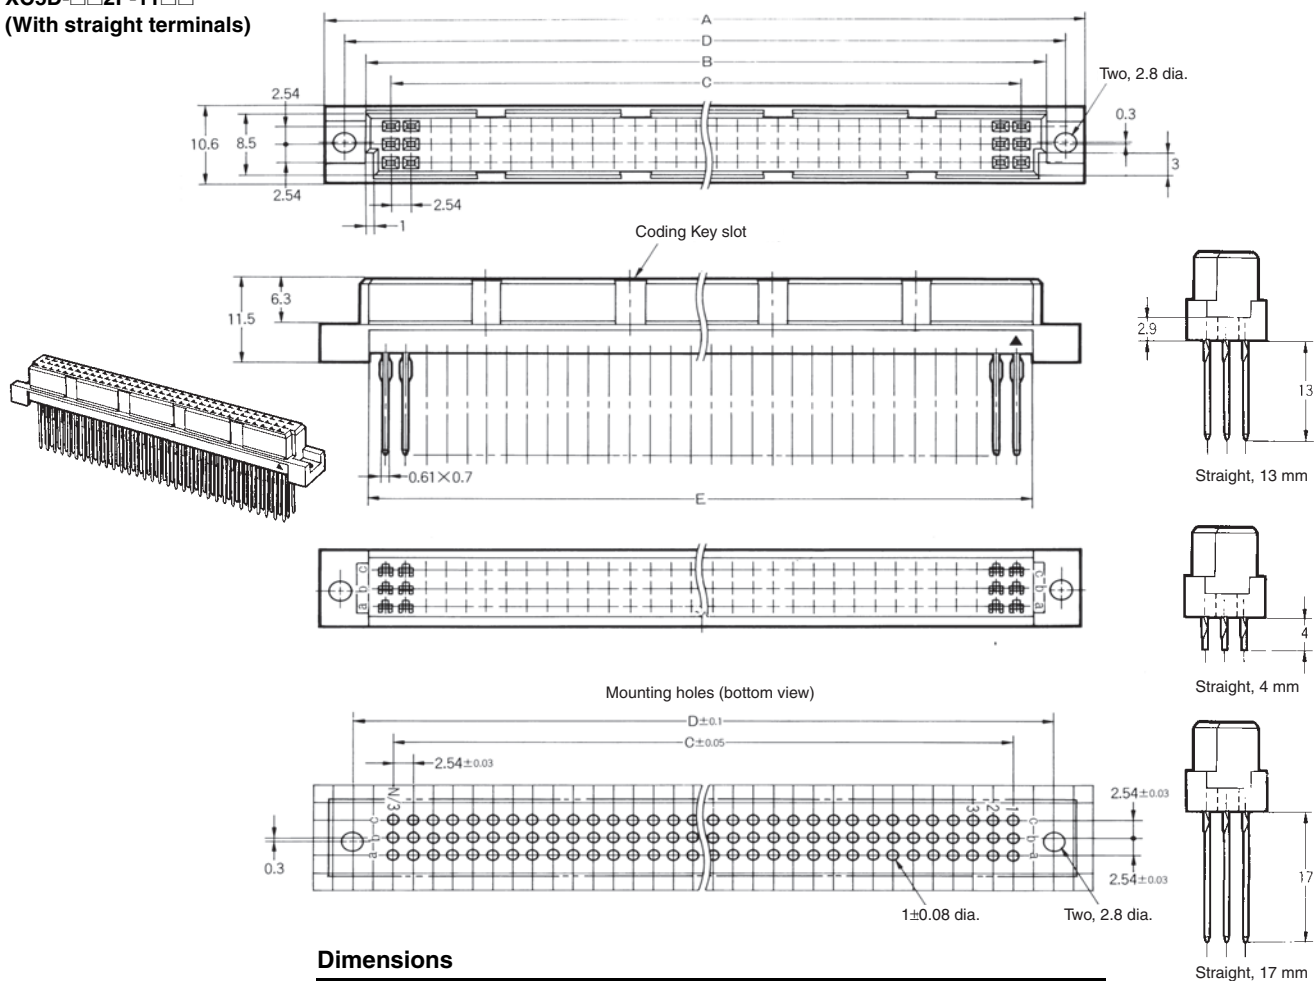

### Dimensions

No. of contacts	Dimensions (mm)					Coding Key slot positions (contact No.)
	A	B	C	D	E	
48	54.2	44.4	38.10	49.36	42.3	5, 12
64*	94.8	85.0	78.74	90.00	82.9	6, 13, 20, 27
96	94.8	85.0	78.74	90.00	82.9	6, 13, 20, 27

\*Has no center row (row b).

## ■ Ordering Information

No. of contacts	Terminal type		
	Straight terminals, 4 mm	Straight terminals, 13 mm	Straight terminals, 17 mm
48	XC5D-482P-1140	XC5D-482P-1131	XC5D-482P-1132
64*	XC5D-642P-1140	XC5D-642P-1131	XC5D-642P-1132
96	XC5D-962P-1140	XC5D-962P-1131	XC5D-962P-1132


\*Has no center row (row b).

# XC5G Triple-row Plugs, DIN R-type, Fine-fit

## ■ Dimensions

(unit: mm)

XC5G-□□2P-11□□  
(With straight terminals)

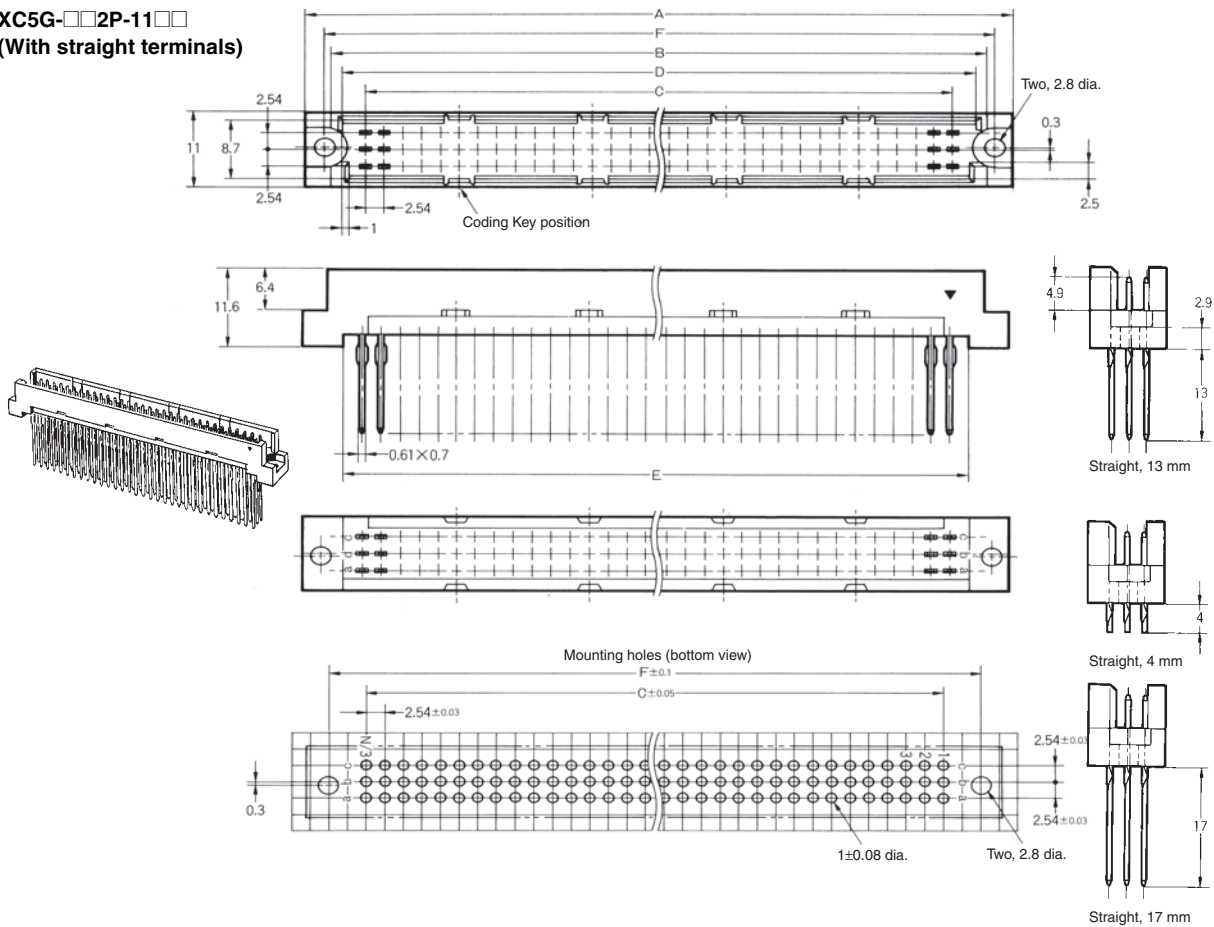

### Dimensions

No. of contacts	Dimensions (mm)						Coding Key positions (contact No.)
	A	B	C	D	E	F	
48	54.2	47.4	38.10	44.6	43.3	49.36	5, 12
64*	94.8	88.0	78.74	85.2	83.9	90.00	6, 13, 20, 27
96	94.8	88.0	78.74	85.2	83.9	90.00	6, 13, 20, 27

\*Has no center row (row b).

## ■ Ordering Information


No. of contacts	Terminal type		
	Straight terminals, 4 mm	Straight terminals, 13 mm	Straight terminals, 17 mm
48	XC5G-482P-1140	XC5G-482P-1131	XC5G-482P-1132
64*	XC5G-642P-1140	XC5G-642P-1131	XC5G-642P-1132
96	XC5G-962P-1140	XC5G-962P-1131	XC5G-962P-1132

\*Has no center row (row b).

## XC5 Accessories

### Press-fit Tool (XY2D-1005)

- Hand-operated tool designed especially for mounting Fine-fit Connectors to a board.
- Hand-operated for ease and safety.
- The Press-fit Tool User's Manual must be ordered separately.

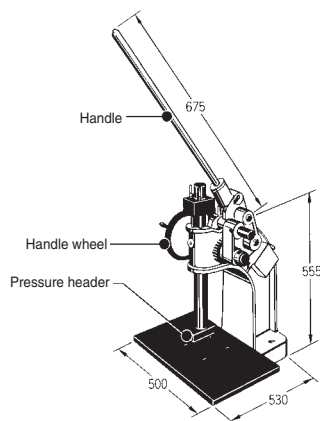

### Specifications


Applicable Connectors	XC5□-□□□P Fine-fit
Max. pressure	2 t
Stroke (max.)	8 mm (handle) 283 mm (handle wheel)
Weight	80 kg
Base area	500 mm × 530 mm

### Model

Model	XY2D-1005
-------	-----------

### Contact Repair Tools

- The tool works on top of the Connector.
- This tool is used for correcting mistakes made with the Press-fit Tool. (plugs only)
- For details on use, see the Fine-fit Connector Press-fit Tool User's Manual. The User's manual must be ordered separately.

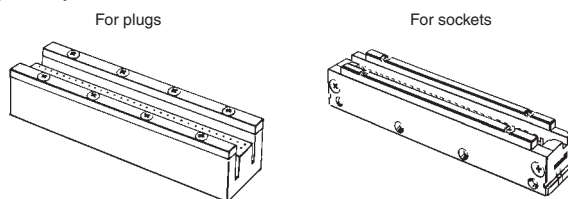

### For Plugs


Rows	No. of contacts	Model
Double rows (XC5E)	32	XY2D-1007
	64	XY2D-1006
Triple rows (XC5G)	48	XY2D-1009
	96 (64)	XY2D-1008

### For Sockets

Rows	No. of contacts	Model
Double rows (XC5B)	32	XY2D-1011
	64	XY2D-1010
Triple rows (XC5D)	48	XY2D-1013
	96 (64)	XY2D-1012

### Support Block and Plungers

- The Support Block and Plungers (2) are set on top of the base board.
- The Support Block is used to protect the fine-fit pins while the Press-fit Tool is being used.
- The Plunger is inserted into the mounting holes. It functions as a positioner for the Connector and cushions the Contact Repair Tool.

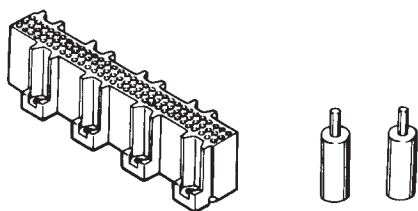

### Support Blocks

Rows	No. of contacts	Model
Double rows	64	XY2D-1014
Triple rows	96	XY2D-1015


**Note:** Cut the XY2D-1014 when using Double-row Connectors with 100 or 32 contacts. Cut the XY2D-1015 when using Triple-row Connectors with 100 or 32 contacts (no center row).

### Plungers

Applicable board thickness	Model
1.6 to 3.2 mm	XY2D-1017


### Setting the Repair Tool, Support Block, and Plunger

- Base board is not supplied by OMRON.
- The base board including the Support Block and Plunger are collectively called the Support Assembly.
- Place the circuit board on top of the Support Assembly and place the whole thing on the Press-fit Tool.
- Insert the Fine-fit Connectors into the board one at a time by moving the Support Assembly left and right.

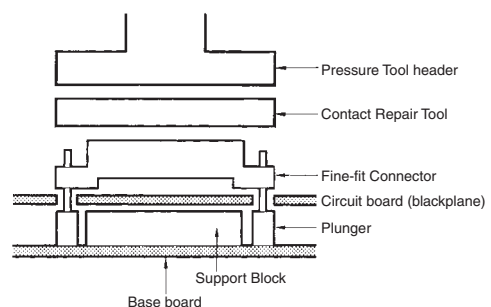

**Accessories for Backplane Systems**

**Daughter board side    Rear Side**

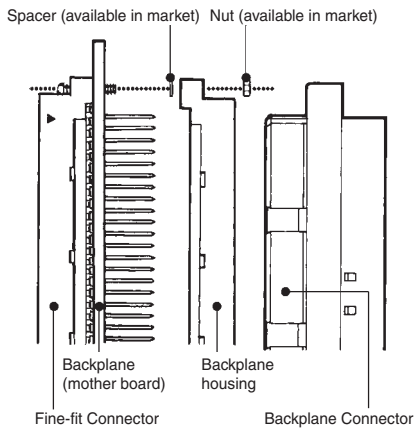

**Note:** When ordering the following Housings, order according to the number per box.

**Backplane Housings (for DIN Connectors) Double-row Type**

No. of contacts	Model
32	XC5E-32
64	XC5E-64

**Triple-row Type**

No. of contacts	Model
48	XC5G-48
96 (64)	XC5G-96

**Spacer**

When using the housing, use the correct spacer for the board as shown below.


Terminal length	2.4-mm board	3.2-mm board	1.6-mm board
13 mm	0.5 mm	(See note.)	1.3 mm
17 mm	4.5 mm	3.7 mm	5.3 mm

**Note:** For wrap terminals only.

**Backplane Housing (MIL Flat, Double-row Type)**

No. of contacts	Model
64	XG4A-64A

**Note:** The housing can be used only when the board thickness is 2.4 mm. It can be used only when the length of the DIN Fine-fit Connector is 17 mm.

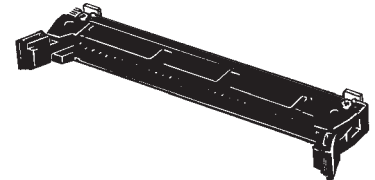

## Precautions

### Correct Use

#### Basic Mating Dimensions

The basic mating dimensions conform to those of the XC5. See page 11 of DIN Twin-contact Connectors XC5.

#### Press-fit Tools and Press-fit Precautions

OMRON provides manuals for Press-fit Tools and precautions. Contact your OMRON representative to request copies.

#### Through-hole Diameters

Holes with 1.0 mm dia. are required by the above Fine-fit Connector.

#### Storage

If the XG4A is stored with the lock half open, the resin parts may deteriorate, causing the lock to feel loose.

When a Connector is not used, close or open the lock completely before you store the Connector.


#### Mounting Prohibited area

Top jig side: Mounting of parts is prohibited in the area of the max. outer shape + 1 mm.


Bottom jig: Mounting of parts is prohibited in an area of the support block max. outer shape and plunger max. outer shape.

#### Top jig (Unit: mm)

Double rows

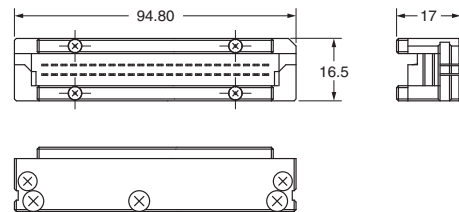


Triple rows

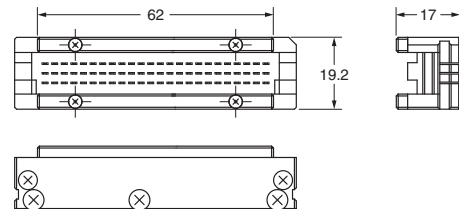


#### Support Blocks (unit: mm)


Double rows

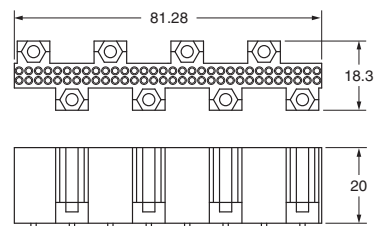

Triple rows

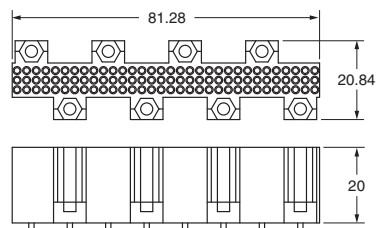

#### Plungers (unit: mm)



Note: An outline drawing of the 64-pin and 96-pin top jigs and support blocks is shown as a sample. For parts with other number of pins, contact your OMRON sales representative.



Please check each region's Terms & Conditions by region website.

---

## **OMRON Corporation**

**Electronic and Mechanical Components Company**

### **Regional Contact**

#### **Americas**

<https://www.components.omron.com/>

#### **Asia-Pacific**

<https://ecb.omron.com.sg/>

#### **Korea**

<https://www.omron-ecb.co.kr/>

#### **Europe**

<http://components.omron.eu/>

#### **China**

<https://www.ecb.omron.com.cn/>

#### **Japan**

<https://www.omron.co.jp/ecb/>