

**CW-B8438**

H

G

F



E

D

C

B

A

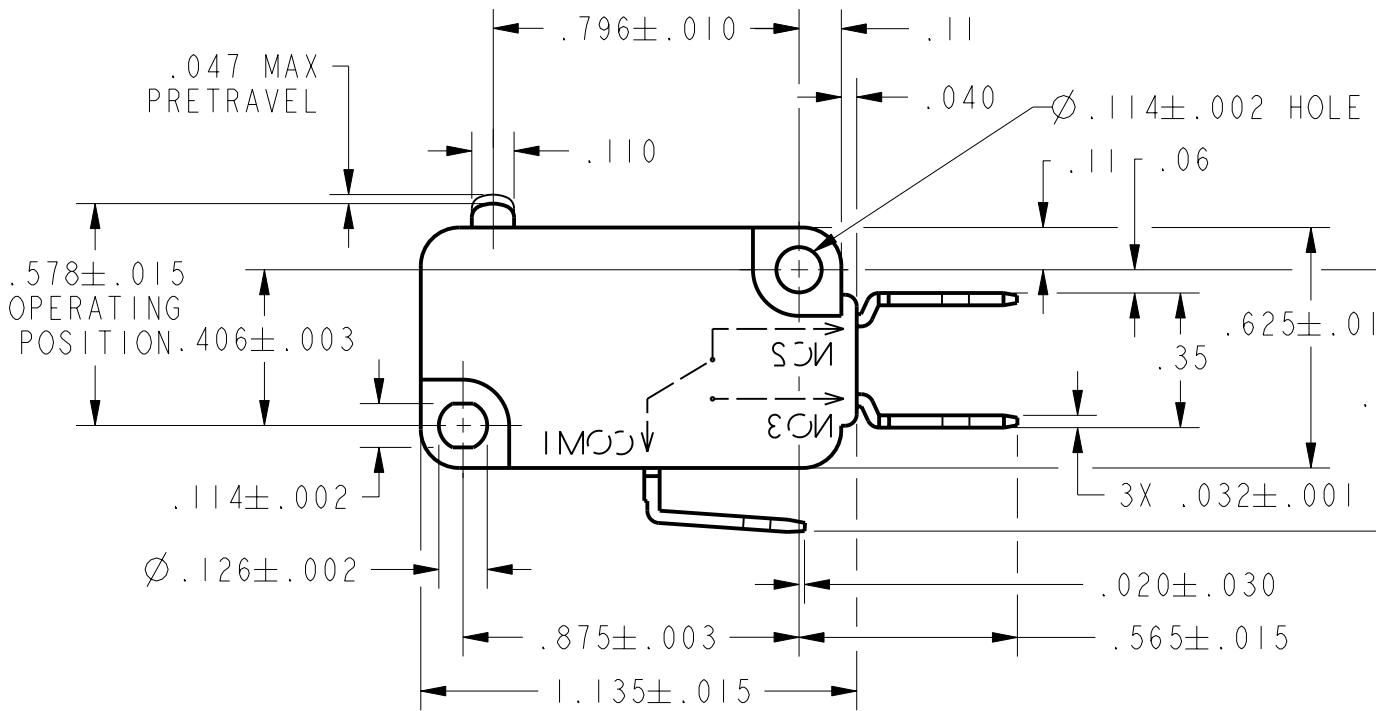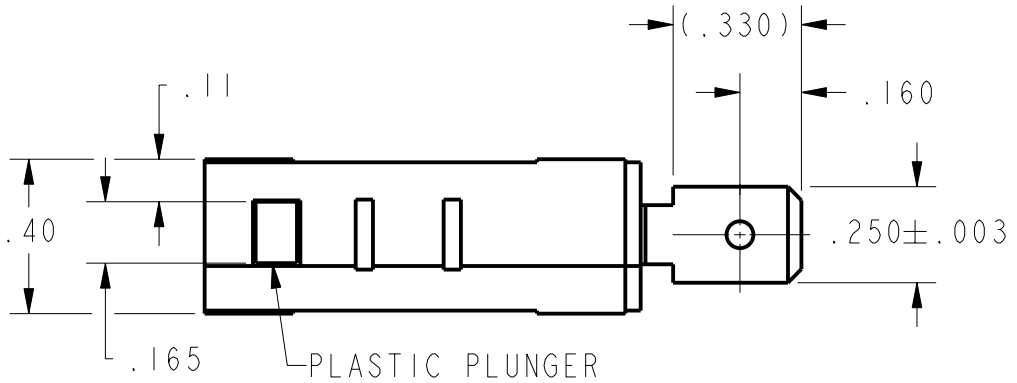

CHARACTERISTICS	
OPERATING FORCE	— — — — — 50 GRAMS MAX
RELEASE FORCE	— — — — — 5 GRAMS MIN
DIFFERENTIAL TRAVEL	— — — — — .002 - .010
OVERTRAVEL	— — — — — .050 MIN
FREE POSITION	— — — — — .625 MAX
RELEASE TRAVEL	— — — — — .010 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
L216	
10A 1/3HP 125, 250 OR 277 VAC	
1/2A 125 VDC	
1/4A 250 VDC; 4A 125 VAC "L"	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:	
NO PLACE	X ±
ONE PLACE	.X ±
TWO PLACE	.XX ±
THREE PLACE	.XXX ±
ANGLES	±
RAW MATERIAL - COMMERCIAL	
THIRD ANGLE PRO	

