

AZ983

80 AMP AUTOMOTIVE RELAY

FEATURES

- 80 Amps contact rating
- High momentary carry current
- High operating temperature range
- 1 Form A and 1 Form C contact arrangements
- Optional built-in coil suppression circuit
- PCB solder terminals
- Epoxy sealed versions available



CONTACTS

Arrangement	SPST-NO (1 Form A) SPDT (1 Form C)
Ratings (max.)	(resistive load)
1 Form A switched power switched current switched voltage	1120 W 80 A 28 VDC
1 Form C switched power switched current switched voltage	840 W 60 A 28 VDC
Rated loads	
1 Form A	80 A at 14 VDC, resistive, 20°C 40 A at 14 VDC, resistive, 85°C 40 A at 28 VDC, resistive, 20°C 20 A at 28 VDC, resistive, 85°C 120A inrush at 28 VDC, resistive, 85°C (inrush for ≤ 3 s with make/break ratio 1:10)
1 Form C	60 A (NO) / 60A (NC) at 14 VDC, resistive, 20°C 40 A (NO) / 30A (NC) at 14 VDC, resistive, 85°C 40 A (NO) / 30A (NC) at 28 VDC, resistive, 20°C 20 A (NO) / 15A (NC) at 28 VDC, resistive, 85°C
Contact material	AgSnO ₂ (silver tin oxide)
Contact resistance	≤ 50 mΩ initial (at 24V/1 A, voltage drop method)

COIL

Nominal coil voltages	6, 12, 24 (DC)
Dropout voltage	≥ 10% of nominal coil voltage
Coil power nominal	(at 23°C) 1.8 W
Temperature rise	68 K at nom. coil voltage
Insulation system	class F, max. temperature 155°C

GENERAL DATA

Life Expectancy	(minimum operations)
mechanical	1 x 10 ⁷
electrical	1 x 10 ⁵ at 80 A, 14VDC, resistive
Operate Time	7 ms (typ., at nominal coil voltage)
Release Time	5 ms (typ., nom. coil voltage, w/o suppression)
Dielectric Strength	(at sea level for 1 min.)
coil to contact	500 V _{RMS}
open load contact	500 V _{RMS}
Insulation Resistance	≥ 100 MΩ (at 23°C, 500 VDC, 50% RH)
Temperature Range operating	(at nominal coil voltage) -40°C to 85°C
Vibration Resistance	1.5 mm DA at 10–55 Hz
Shock	10 g
Enclosure material	Polyamide
Terminals	Tinned copper alloy, THT PCB mounting
Soldering	(referring IEC 61760-1 wave soldering)
preheating	120°C (248°F) / ≤ 120 s
soldering	260 ±5°C (500 ±9°F) / ≤ 2 x 5 s
Dimensions and Weight	29.0 mm x 29.0 mm x 28.0 mm, 40 grams
Packing (pcs.)	20 per plastic tray 400 per carton box

ORDERING DATA

AZ983-□□-□□D□□	
□□	Sealing option
□□	nil: non sealed
□□	E: sealed version
D□□	Coil suppression circuit
□□	nil: none
□□	R: Resistor in parallel to coil
□□	D: Diode in parallel to coil (cathode on pin 86)
	Nominal coil voltage
	see coil voltage specifications table
	Contact arrangement
	1A: 1 Form A (SPST-NO)
	1C: 1 Form C (SPDT)

Example ordering data

AZ983-1A-12D	1 Form A contact arrangement, 12VDC nominal coil voltage, no suppression circuit, non-sealed
AZ983-1C-24DDE	1 Form C contact arrangement, 24VDC nominal coil voltage, diode in parallel to coil, sealed

ZETTLER

www.ZETTLER-group.com

page 1 of 4

2024-03-01

AZ983

COIL VOLTAGE SPECIFICATIONS



Voltage [VDC]			Resistance [Ω] $\pm 10\%$	Power (ref.) [W]	Parallel resistor (option R) [Ω]
nominal	must operate	max.			
6	3.9	7.8	20	1.8	180
12	7.8	15.6	80		680
24	15.6	31.2	320		2700

Notes:

- All values at 23°C, upright position, terminals downward.
- Voltage max. is the voltage the coil can endure for a short period of time.

MECHANICAL DATA


Dimensions in mm. Tolerance $\pm 0.3\text{mm}$ if not stated otherwise.
 Notes: Drawings based on 1 Form C sealed version unless otherwise stated.
 Pin dimensions for reference only and given without tin coating.
 Terminal 87a is omitted at 1 Form A versions.
 * Tabs only for sealed versions.

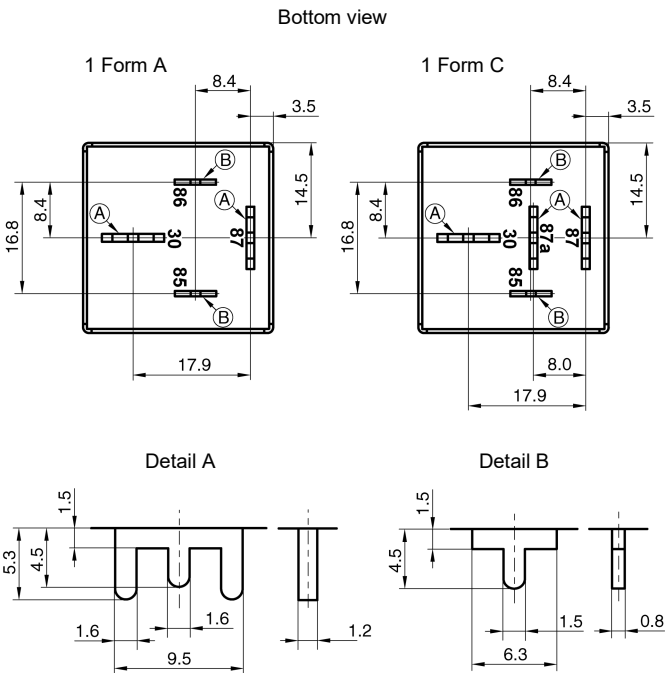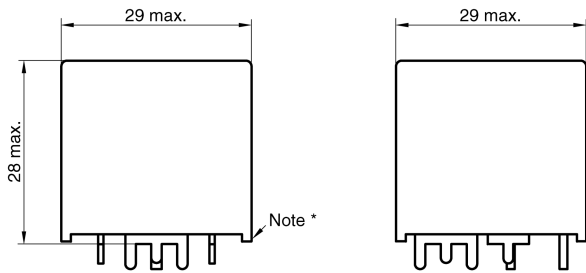

CAD data in attachment of this datasheet.


WIRING DIAGRAMS

Viewed towards terminals.

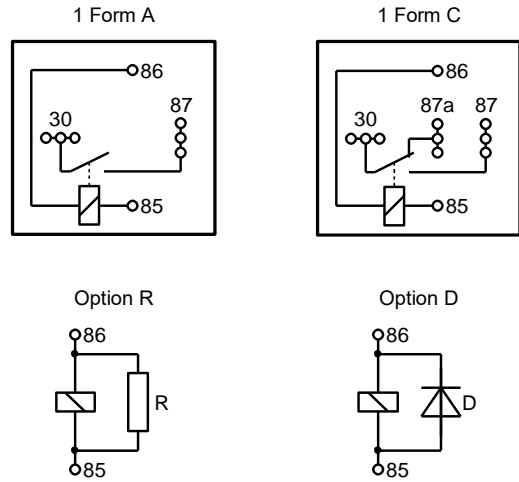

PCB FOOTPRINT

Layout and footprint recommendation. Dimensions in mm. Viewed towards terminals.

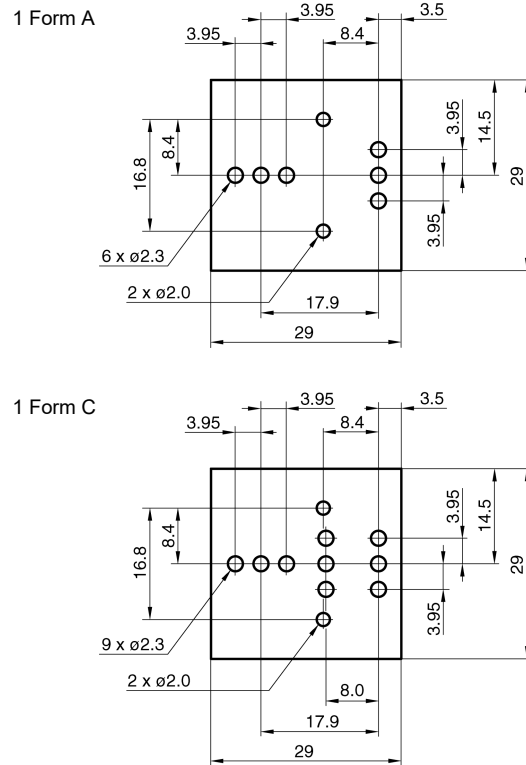

NOTES

General

1. All values in this datasheet are at reference temperature of 23°C (73°F) unless stated otherwise.
2. Evaluate the component's performance and operating conditions under the worst-case conditions of the actual application.
3. The datasheet and the component's specifications are subject to change without notice.

Storage, handling, and environmental guidelines

4. Relays are electromechanical components that are sensitive to shock. The relay's adjustment can be affected if the relay is subjected to excessive shock or excessive pressure is applied to the relay case. Relays which have been dropped must no longer be used.
5. Substances containing silicone or phosphorus must be avoided in the vicinity to the relay. Outgassing from these substances can penetrate the relay and adhere on the contacts. Deposits of these substances may act as insulators and adversely affect the contact resistance. Silicone can be found e.g. in gaskets, lubricants or filling materials, phosphorus can be found e.g. as a flame retardant in plastics.
6. Prevent relays from atmospheres containing corrosive gases. Corrosion of internal structures and contacts leads to malfunction and shortens the component's service life.
7. Prevent non-sealed relays from atmospheres subject to dust. Dust particles may enter the case and get stuck between the contacts, causing the contact circuits to fail.
8. Do not use these relays in environments with explosive or flammable gases. Electrical arcing at the contacts could ignite these gases and cause fire.
9. For automated dual wave soldering process we recommend preheating with 120°C (248°F) for max. 120 seconds and a soldering temperature of 260 ±5°C (500 ±9°F) for max. 10 seconds soldering time (max. 5 seconds per wave). For manual soldering we recommend 350°C (662°F) max. temperature for max. 5 seconds. During the soldering process, no force may be exerted on the relay terminals.
10. Non-sealed relays must not be washed, immersion cleaned or conformal coated as substances may enter the case and cause corrosion or seizure of mechanical parts.
11. Avoid high frequency or ultrasonic vibrations on the relays as these can cause contact welding and misalignment or destruction of internal structures.
12. During operation, storage and transport, ambient temperature should be within the specified operating temperature range. Humidity should be in the range of 5% to 85% RH. Icing and condensation must be avoided. Relays stored for an extended period of time may show initially increased contact resistance values due to chemical effects such as oxidation.

Design guidelines

13. The relay may pull in and operate with less than the specified *must operate* voltage value.
14. The coil's *must operate*, the coil's *ohmic resistance* and the relay's *operate time* depend on the temperature of the coil. The specified values are given for a coil temperature of 23°C and increase by approx. 0.39% per Kelvin of temperature rise. This circumstance must be considered, especially during operation with high load currents and elevated ambient temperature.
15. Coil suppression circuits such as diodes, etc. in parallel to the coil will lengthen the release time. We recommend using suppression circuits with a breakdown voltage of approx. 2 times the nominal coil voltage in order to achieve a quick release time.
16. Contact resistance is a function of load current, dwell time and wear level of the contacts. Immediately after closing the contacts, or if tested with low current only, the contact resistance will show a relatively high value. A low level steady state contact resistance is reached at higher current after a certain time in thermal equilibrium.
17. The relay dissipates heat from power losses through its load terminals. Provide sufficient cross section and area of the PCB traces so that they can act as heat spreader.
18. For PCBs with multiple relays, do not place the components directly next to each other. We suggest providing a mounting distance of minimum 10 mm to allow for better cooling.

AZ983

DISCLAIMER

This product specification is to be used in conjunction with the application notes which can be downloaded from the regional ZETTLER relay websites. The specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.

ZETTLER GROUP

Building on a foundation of more than a century of expertise in German precision engineering, ZETTLER Group is a world-class enterprise, engaged in the design, manufacturing, sales and distribution of electronic components. Our industry leadership is based on a unique combination of engineering competence and global scale.

For more information on other ZETTLER Group companies, please visit zettler-group.com. For support on this product or other ZETTLER relays, please visit one of the group sites below.

SITES FOR ZETTLER RELAYS

NORTH AMERICA

American Zettler, Inc.
www.azettler.com
sales@azettler.com

EUROPE

Zettler Electronics, GmbH
www.zettlerelectronics.com
office@zettlerelectronics.com

Zettler Electronics, Poland
www.zettlerelectronics.pl
office@zettlerelectronics.pl

CHINA

Zettler Group, China
www.zettlercn.com
relay@zettlercn.com

ASIA PACIFIC

Zettler Electronics (HK) Ltd.
www.zettlerhk.com
sales@zettlerhk.com

