
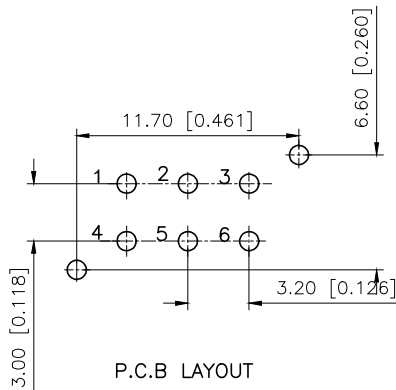


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.23	阿树

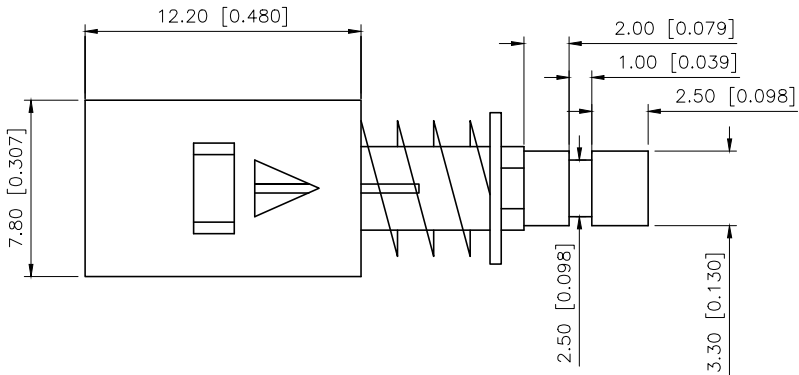

FEATURES
Light operating force
Long term low contact resistance
Momentary or latching operation
Short stroke 3.0mm to latch




■ SPECIFICATIONS

1.ELECTRICAL	
Con tact rating	0.1A,30VDC
Con tact resistance	50mΩ Max
Insulation resistance	100MΩ Min .at 250VDC
Dielectric strength	250VAC Min .for 60sec

2.MECHANICAL AND ENVIRONMENTAL

●Temperature rating	Operating -15 to +55 storage.-25 to +65
● Operation	160±80gf
● Stroke	Lock Stroke 2.0±0.2mm Full stroke,2.5±0.2mm
● Operating life	Full load:1x10 ⁴ cycles NO load:1x10 ⁵ cycles
● Con tact form	DPDT

PAPT NO	XKBS22E05-X
OPERATION	W:NO LOCK Z:LOCK

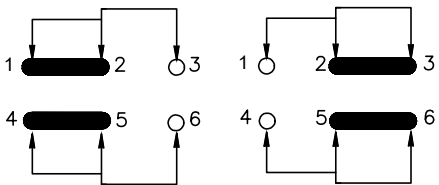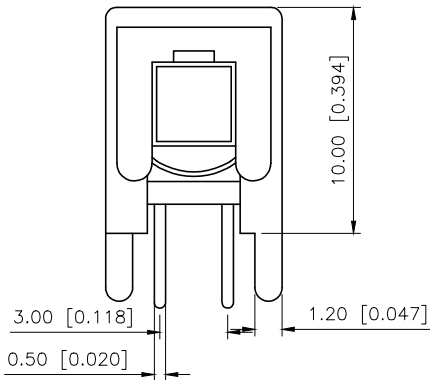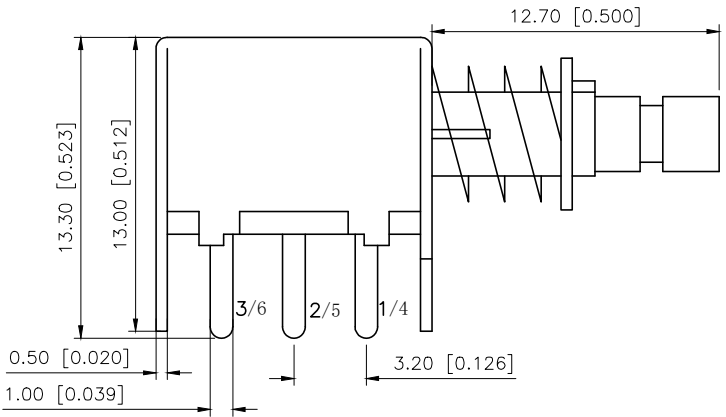

常态: 1-2导通 4-5导通
按下: 2-3导通 5-6导通

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	KEY SWITCH
CHECKED		UNIT:	mm/in	PART NO.:	XKBS22E05-X
APPROVED		SIZE:	A4	DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1