
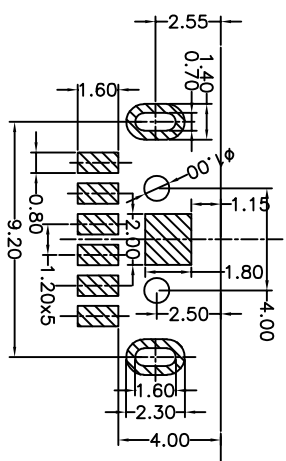








CUSTOMER

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

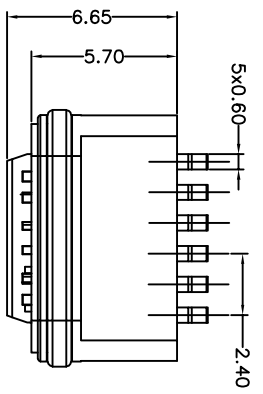

PCB LAYOUT 图仅供参考

Note:

1. Material:

1.1 Housing: PA9T

1.2 Contact: C5191, t=0.20mm

1.3 Shell: Kirsite

2. ELECTRICAL:

2-1: CURRENT RATING:

VBUS AND GND CONTACTS RATED AT 1.25A

PARALLELED FOR A TOTAL OF 5A;

2-2: INITIAL CONTACT RESISTANCE : 40 MEGOHMS

2-3: DIELECTRIC WITHSTANDING VOLTAGE:

100V AC MIN;

3: MECHANICAL CHARACTERISTICS:

3-1: MATING FORCE: 5~20N

3-2: UNMATING FORCE: 8~20N (INITIAL), 6~20N (AFTER 10000 CYCLES)

3-3: FREQUENCY: 200±50 CYCLES / HOUR, 10000 CYCLES

3-4: OPERATING TEMPERATURE : -40°~80° .

4: WATERPROOF: IP-X7.

TABLE B

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

TOLERANCE		NAME (INTENDED USE)		DRAWG NO.	
X.X	±0.30	X.X	±10'	FY23-018TC61F157-01	
.XX	±0.20	.X'	± 8'	CF 6P防水板上后两脚5.7L	
.XXX	±0.10	.XX'	± 5'	FY23-018TC61F157-01	
UNITS	mm	DESIGN:	ZXM	SCALE SHEET REV.	
MATERILA	----	CHED:		1:1 1/2 A	
FINISH	----	APPD:			

FUYOU 广东富盈兴业精密科技实业有限公司
Guangdong FUYOU Precision Electronic Technology Co.,LTD.