

Product description

Snap-In Female panel mount connector, Contacts: 12, unshielded, solder, IP67


Area Part no. series 720 99 9136 400 12


Illustration

Scale drawing

Contact arrangement (Plug-in side)







You can find the component part drawing and assembly instructions on the next page.

Technical data

General features

Part no.	99 9136 400 12
Connector design	Female panel mount connector
Version	Connector socket straight
Connector locking system	snap-in
Termination	solder
Degree of protection	IP67
Cross-sectional area	max. 0.25 mm² / AWG 24
Temperature range from/to	-25 °C / 85 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	6.25
Customs tariff number	85369010
Country of Origin	DE

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	800 V
Rated current	2.0 A
Insulation resistance	≥ 10 ¹⁰ Ω
Pollution degree	2
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded



Product description

Snap-In Female panel mount connector, Contacts: 12, unshielded, solder, IP67

Area Part no. series 720 99 9136 400 12


Material

Housing material	PUR
Contact body material	PA (UL94 V-0) grey
Contact material	CuSn (bronze)
Contact plating	Au (gold)
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	8db8ab9d-e09b-4004-a513-c40fd42ee1ea
Classifications	
eCl@ss 11.1	27-44-01-02
ETIM 9.0	EC002635
Cable data - Structure of the cable	

Single-lead structure

14 x 0.15 mm

Assembly instructions / Panel cut-out






Product description

Snap-In Female panel mount connector, Contacts: 12, unshielded, solder, IP67

Area Part no. series 720 99 9136 400 12

Component part drawing

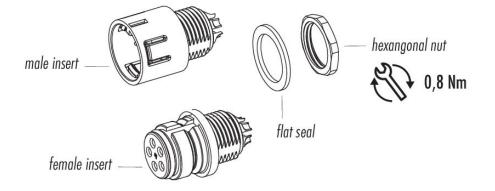



Product description

Snap-In Female panel mount connector, Contacts: 12, unshielded, solder, IP67

Area Part no. series 720 99 9136 400 12

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

The plug connector is not suitable for mains voltages Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".