
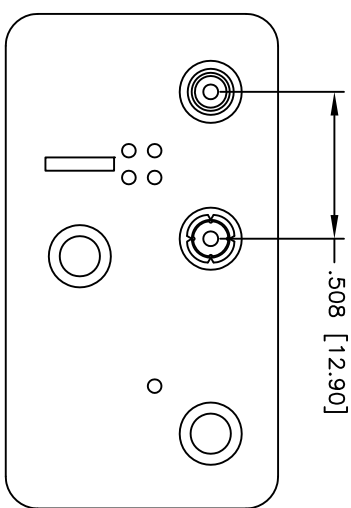
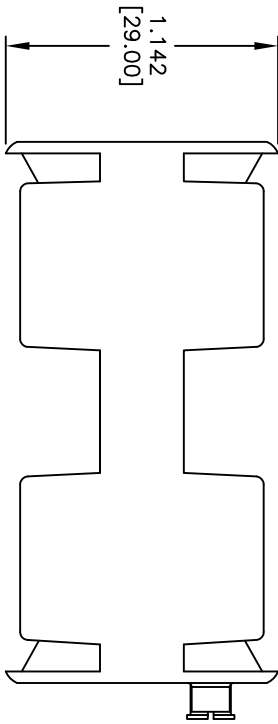


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/17/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

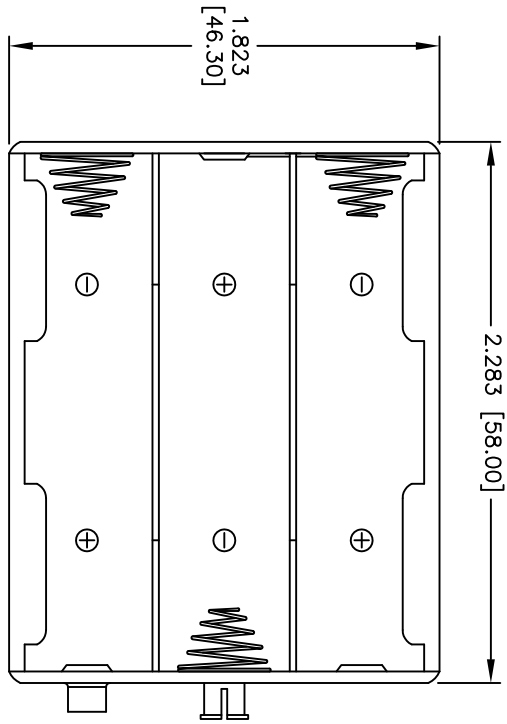

**SPECIFICATIONS:**

**Material:**  
 Insulator: Impact resistant Polypropylene, rated UL94-HB  
 Insulator color: Black  
 Spring: Steel, Nickel plated  
 Contacts: Steel, Nickel plated  
 Snap terminals: Brass, Nickel plated

**Electrical:**  
 Operating voltage: 1.5 VDC max.  
 Operating temperature: -10°C to +80°C  
 Environmental:  
 Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	1/17/05
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**BATTERY HOLDER, MALE/FEMALE SNAPS  
 FOR SIX "AA" CELLS**

TITLE	SIZE	PART NO.	REV.
	X	BH-07-2	
REF:	SCALE:	NTS	SHEET 1 OF 1

