
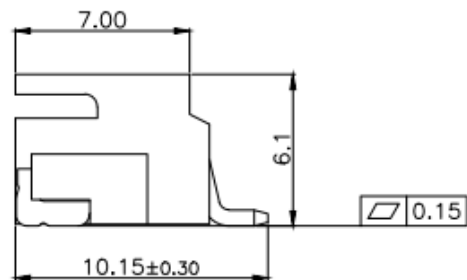
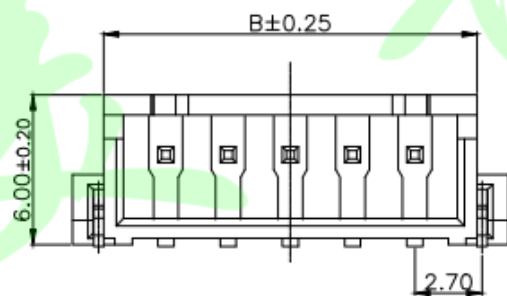
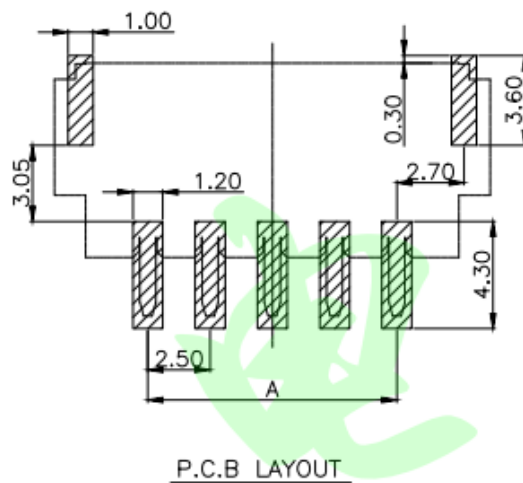


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A		新订图面		2016.8.13

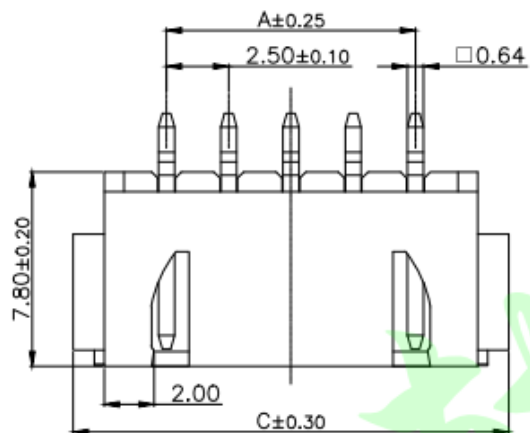

Specifications / 技术规格:

- Current rating: 3A  
额定电流: 3A
- Voltage rating: 250V AC,DC  
额定电压: 250V AC,DC
- Insulation Resistance: 1000MΩ Min.  
绝缘电阻: 最小1000MΩ
- Dielectric Withstanding: 1000V AC 1Min  
耐压: 1000V AC 1分钟
- Contact Resistance: 20mΩ Max.  
接触电阻: 最大20mΩ
- Operating Temperature: -25°C to +85°C  
工作温度: -25°C 到85°C

- Materials / 材料:
- Contact Material: Brass(Sn plating)  
接触铜针材料: 黄铜(镀锡)
- Soldering Terminal: Brass(Sn plating)  
焊片材料: 黄铜(镀锡)
- Insulation Material: LCP UL94V-0  
绝缘体材料: LCP UL94 V-0

孔数	型号	尺寸 (mm)		
		A	B	C
2	2.54-2AWT	2.5	7.5	10.0
3	2.54-3AWT	5.0	10.0	12.5
4	2.54-4AWT	7.5	12.5	15.0
5	2.54-5AWT	10.0	15.0	17.5
6	2.54-6AWT	12.5	17.5	20.0
16	2.54-16AWT	37.5	42.5	45.0

东莞市美韩电子科技有限公司  
Dongguan Usakro Electronic Technology Co., Ltd.

GENERAL TOLERANCE	
.X* ± 3°	.XXX ± 0.10
.X* ± 2°	.XX ± 0.15
.XX* ± 1°	.X ± 0.25
.XXX* ± 0.5°	X. ± 0.35

DESIGN: WWH	DATE: 2016.8.13
CHECKED:	DATE: 2016.8.13
AUDITED:	DATE: 2016.8.13
APPROVED:	DATE: 2016.8.13

DWG. NO.	PART NO. UK-2.54-2AWT
TITLE.	

TITLE:  
XH2.54卧贴

REV. A	UNIT. MM	SCALE. 1:1
--------	----------	------------