

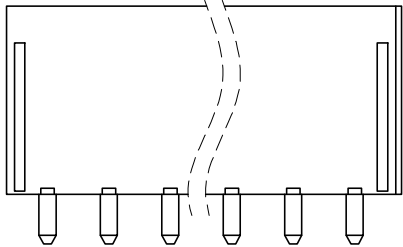
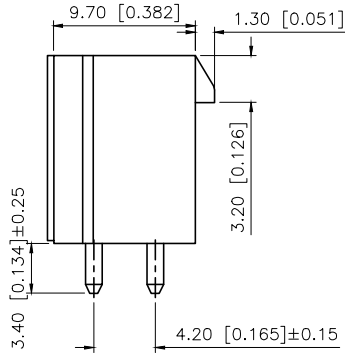
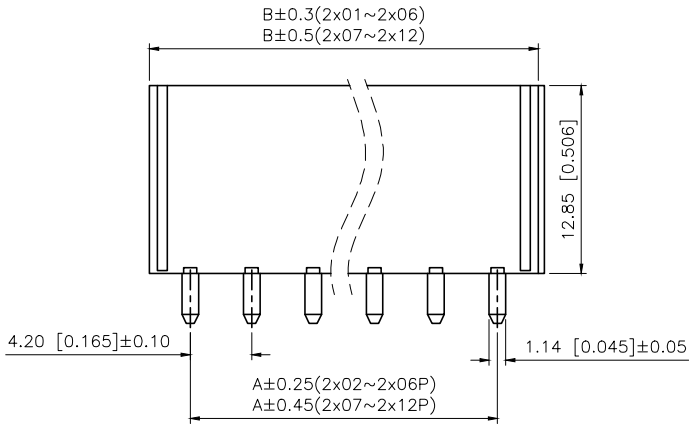



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		新增其他pin位图例，图面升级整理图面	2025.07.01	阿树

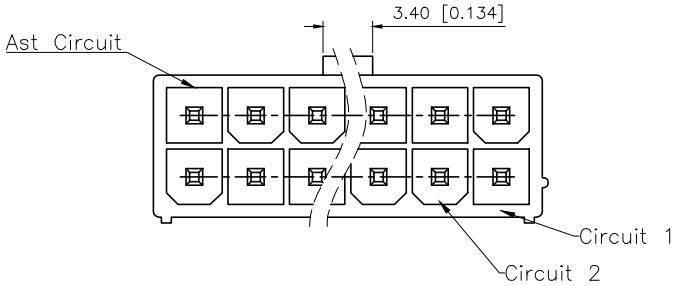

2x12 High temperature material

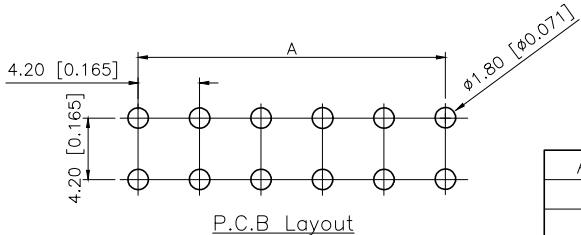

■SPECIFICATIONS

- Voltage rating:600V AC/DC
- Current rating:7A AC/DC
- Withstanding Voltage:1500V AC/minute
- Temperature range:-45°C+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ

PART NO.:

X9357 W V-2xXX-N2 SN
① ② ③ ④ ⑤ ⑥

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:V-Straight 180°
- ④Row No-Pin No: 2xXX-2x01P~2x12P
- ⑤Material: N0-PA66 94V-0;
N2-PA66 94V-2
- ⑥Plating Category: SN-Bright Tin Plating
V01-Plating Gold Flash

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2x01	—	5.60	2x07	25.20	30.80
2x02	4.20	9.80	2x08	29.40	35.00
2x03	8.40	14.00	2x09	33.60	39.20
2x04	12.60	18.20	2x10	37.80	43.40
2x05	16.80	22.40	2x11	42.00	47.60
2x06	21.00	26.60	2x12	46.20	51.80

X9357WV-2xXX-N2SN	PA66 UL94V-2	Brass	X9357HM
PART NO	Material	Material(Pin)	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	MODEL TYPE: 4.20 mm Crimp Style Connectors
UNIT: mm/in	PART NO.: X9357WV-2xXX-N2SN
SIZE: A4	DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A1