# W54-XB2A4A10-5 - ACTIVE

### Potter & Brumfield W54

TE Internal #: 1423901-1 Thermal, Series Trip, White, Operating Voltage 250 VAC, Operating Voltage 50 VDC, 5A Current Rating, 1 Pole, Potter & Brumfield W54, Circuit Breakers

View on TE.com >

Relays & Contactors > Circuit Breakers



## Circuit Breaker Type: Thermal

Circuit Function: Series Trip

Illuminated: Without

Actuator Color: White

Operating Voltage: 250 VAC

# Features

# Product Type Features

Illumination Type	No Light
Actuator Type	Push to Reset
Circuit Breaker Type	Thermal



Illuminated		luminated
-------------	--	-----------

## Without

Configuration Features	
Panel Cutout Size	8.8 x 9.7 mm[.346 x .382 in]
Circuit Function	Series Trip
Number of Poles	1
Electrical Characteristics	
Operating Voltage	50 VDC
Current Rating	5 A
Interrupt Capacity	1000A @ 250VAC/50VDC
Body Features	
Actuator Color	White
Contact Features	
Trip Time at 200%	5 – 30 seconds
Termination Features	
Terminal Configuration	6.35 [.25] Straight Quick Connect Tab

**C** For support call+1 800 522 6752

## W54-XB2A4A10-5

Thermal, Series Trip, White, Operating Voltage 250 VAC, Operating Voltage 50 VDC, 5A Current Rating, 1 Pole, Potter & Brumfield W54, Circuit Breakers



### **Mechanical Attachment**

Mounting Hardware Packaging

Mounting Bushing

Mounting Options

**Identification Marking** 

Stamped Marking Type

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Cadmium oxide (11.48% in Component Part) Article Safe Usage Statements:

Use personal protective equipment as required. Do not eat, drink or smoke when

Assembled to Bushing

3/8" (One Side Flat) x 10mm Long, Metal

Knurled Nut/Hex Nut

Red Rate Marking

using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

#### Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

## W54-XB2A4A10-5

Thermal, Series Trip, White, Operating Voltage 250 VAC, Operating Voltage 50 VDC, 5A Current Rating, 1 Pole, Potter & Brumfield W54, Circuit Breakers






# Also in the Series | Potter & Brumfield W54



#### Circuit Breakers(19)

# Customers Also Bought

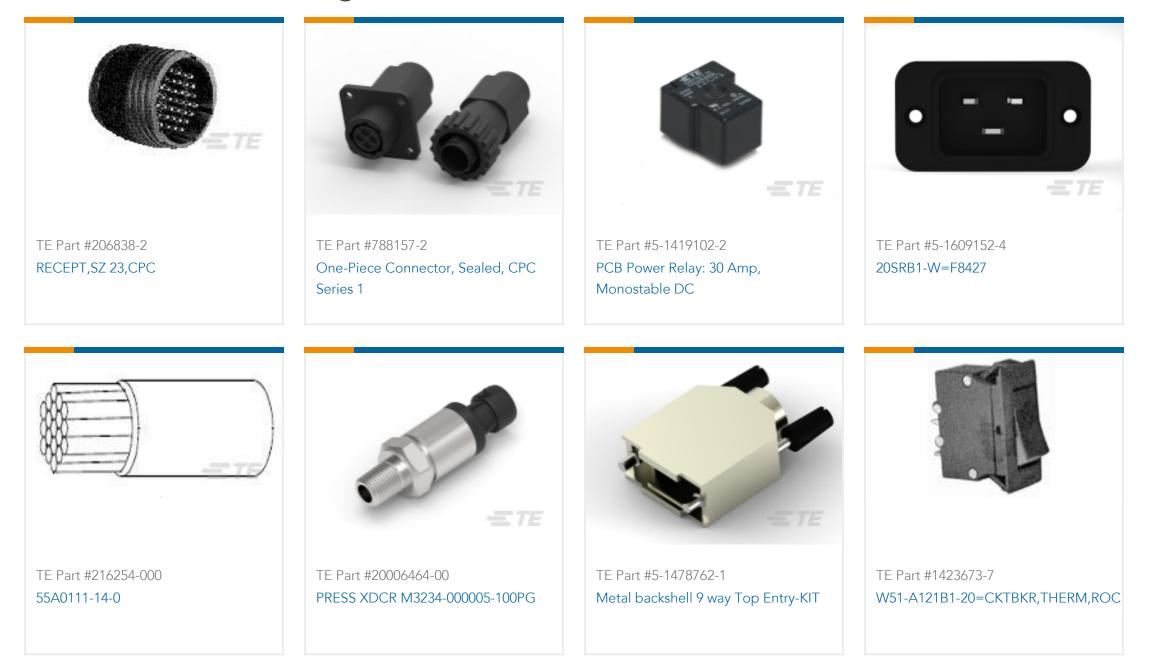

# Documents

### **CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1423901-1\_C.2d\_dxf.zip

English

## W54-XB2A4A10-5

Thermal, Series Trip, White, Operating Voltage 250 VAC, Operating Voltage 50 VDC, 5A Current Rating, 1 Pole, Potter & Brumfield W54, Circuit Breakers



Customer View Model

ENG\_CVM\_CVM\_1423901-1\_C.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1423901-1\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages W54 Push To Reset Only Thermal Circuit Breaker

English

Agency Approvals CCC Certificate

English