



Part No	Pin	A	B	Part No	Pin	A	B
WAFER-0.8-2PWB	2	0.80	3.85	WAFER-0.8-14PWB	14	10.40	13.45
WAFER-0.8-3PWB	3	1.60	4.65	WAFER-0.8-15PWB	15	11.20	14.25
WAFER-0.8-4PWB	4	2.40	5.45	WAFER-0.8-16PWB	16	12.00	15.05
WAFER-0.8-5PWB	5	3.20	6.25	WAFER-0.8-17PWB	17	12.80	15.85
WAFER-0.8-6PWB	6	4.00	7.05	WAFER-0.8-18PWB	18	13.60	16.65
WAFER-0.8-7PWB	7	4.80	7.85	WAFER-0.8-19PWB	19	14.40	17.45
WAFER-0.8-8PWB	8	5.60	8.65	WAFER-0.8-20PWB	20	15.20	18.25
WAFER-0.8-9PWB	9	6.40	9.45	WAFER-0.8-21PWB	21	16.00	19.05
WAFER-0.8-10PWB	10	7.20	10.25	WAFER-0.8-22PWB	22	16.80	19.85
WAFER-0.8-11PWB	11	8.00	11.05	WAFER-0.8-23PWB	23	17.60	20.65
WAFER-0.8-12PWB	12	8.80	11.85	WAFER-0.8-24PWB	24	18.40	21.45
WAFER-0.8-13PWB	13	9.60	12.65				

NOTES:

- 1.BASE: LCP
- 2.PIN: Brass
- 3.Solder Tab: Brass

SPECIFICATIONS:

- 1.Spacing: 0.8
- 2.Voltage Rating: 30V AC DC
- 3.Current Rating: 0.5A AC DC
- 4.Insulation Resistance: 100MΩ Min
- 5.Contact Resistance: 20mΩ Max
- 6.Withstanding voltage: 200V AC 1/Minute
- 7.Temperatuer Range: -25℃ ~+ 85℃

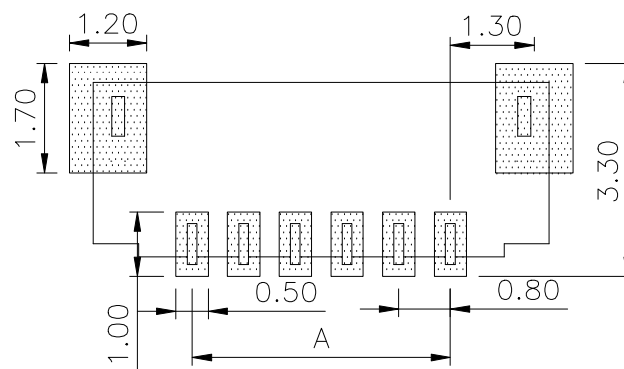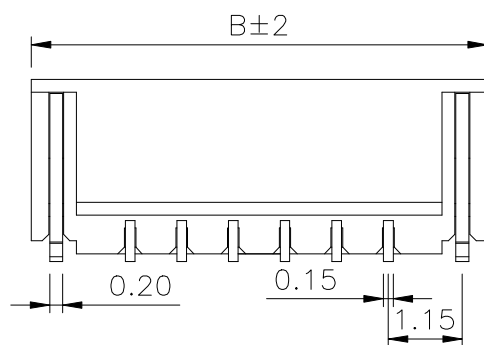

P.C.B LAYOUT

MANUFACTURE DWG			东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: WAFER 0.8 贴片	
DECIMALS:	ANGLES:		PAR	WAFER-0.8-NPWB
X.:±0.2	X'.:±5°		DWN	
.X:±0.1	X.X':±3°	CHKD		
.XX:±0.05	X.XX':±1°	APVD		
CUSTOMER COPY		SCALE1:1	UNIT:MM	
		SIZE:A4	SHEET:1F1	REV:A