


FRONT VIEW



RIGHT SIDE VIEW

XKB Connectivity

MATERIAL 材料:

HOUSING 外壳: LCP,UL94V-0,BLACK.

TERMINAL 端子: PHOSPHOR BRONZE T=0.3MM, GOLD PLATING

SHIELD 保护物: C2680,T=0.20MM

ELECTRICAL 电气:

VOLTAGE 电压: 150 VOLTS AC.

CURRENT RATING 电流额定值: 1.5AMP.


DIELECTRIC STRENGTH 介电强度: 1000 VAC RMS 50HZ OR 60HZ,1 MIN

INSULATION RESISTANCE 绝缘电阻: 500 MEGA OHMS MIN.


CONTACT RESISTANCE 接触电阻: 40 MILLIOHMS MAX.

OPERATING TEMPERATURE 工作温度: -40°C~+80°C.


ALL CRITICAL DIMENSIONS WITH ***

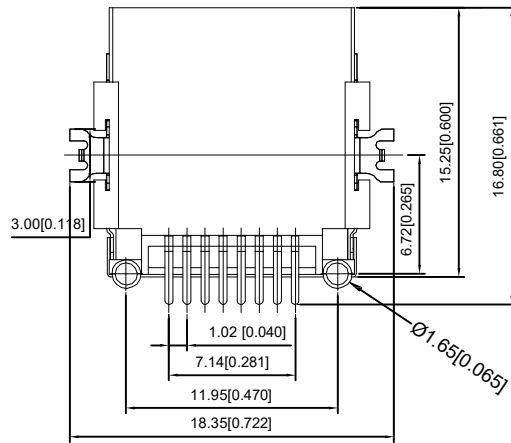

BOTTOM VIEW

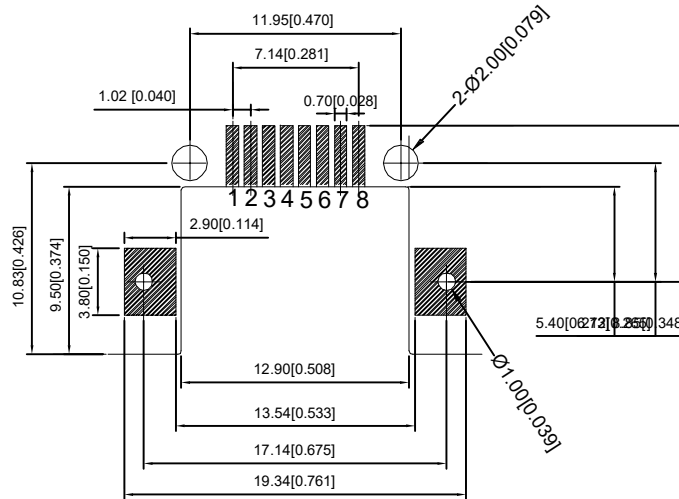

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

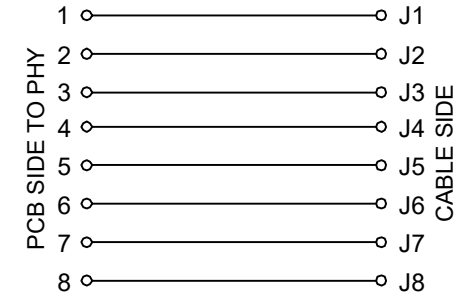

X48ADGWA6SB1133

- 1:AU=1U"
- 3:AU=3U"
- 4:AU=6U"
- 5:AU=15U"
- 6:AU=30U"

ΔX					ANGLAR	±5°
ΔX					L ≤ 4	±0.2
ΔX					4 < L ≤ 16	±0.3
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16 < L ≤ 63	±0.4
	REVISIONS				L > 63	±0.5
					UNSPECIFIED TOLERANCES	



DSND		SCALE: N/A	MODEL TYPE:	RJ JACK
DWN		VIEW:	PART NO.:	
CHKD		UNIT: mm/in	DWG NO.:	X48ADGWA6SB1133
APPD		SIZE: A4	WEIGHT	SHEET
			1/1	REVISION
				A0

XKB INDUSTRIAL PRECISION CO., LIMITED