
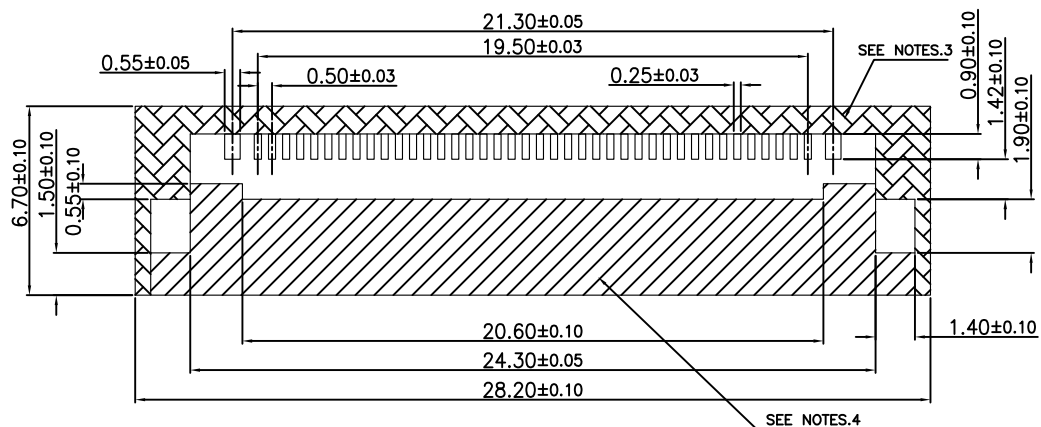


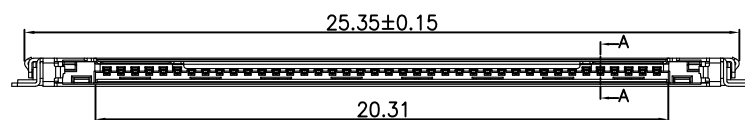
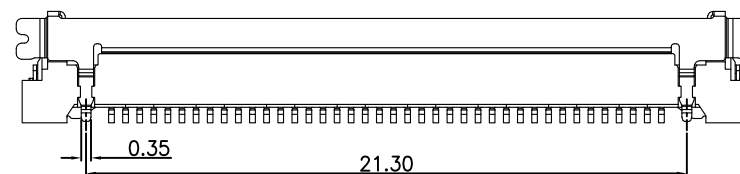


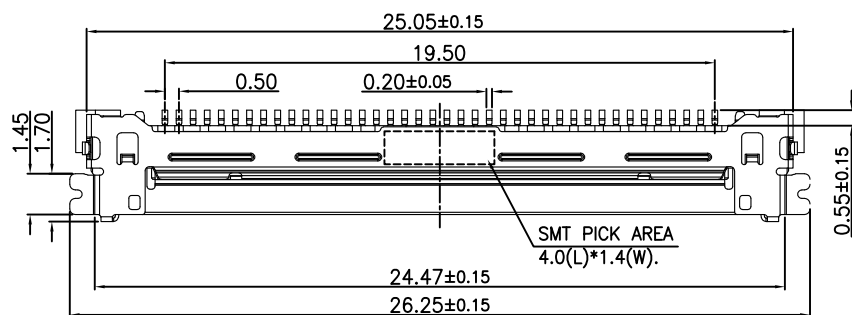

RECOMMENDED P.C.B LAYOUT

NOTES:

1. MATERIAL:

HOUSING: LCP BLACK UL94V-0;

TERMINAL: COPPER ALLOY /Au ON CONTACT AREA AND SELECTIVE Au 1u" MIN SOLDERING AREA OVER Ni 50u" MIN.

SHELL: COPPER ALLOY /Au 1u", Ni 50u" MIN.

2. THE WARPAGE OF PRODUCT SHOULD BE NOT EXCEED 0.10mm.

3. PLUG WITH PULL BAR USE AREA:

NO TRACE, NO TEST POINT, NO VIA HOLE, NO GROUND AREA.

4. RECEPTACLE & PLUG USE AREA:

NO TRACE, NO TEST POINT, NO VIA HOLE, NO GROUND AREA ,



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: LVDS 0.5PH 1.0H 40P
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW67-LVDS40-100B
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2306121202
			SHEET NO. 1 OF 1