
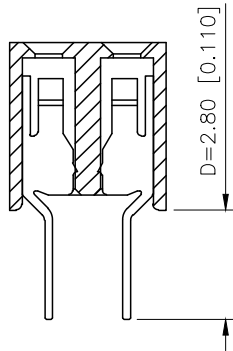
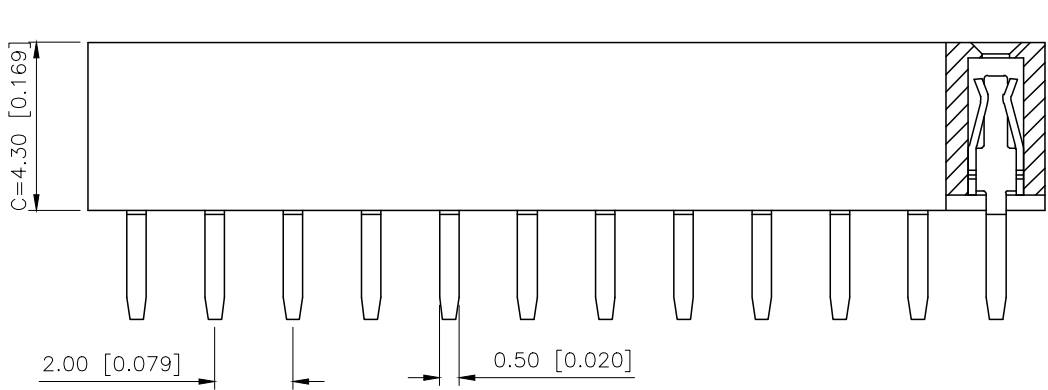


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.2.25	阿树

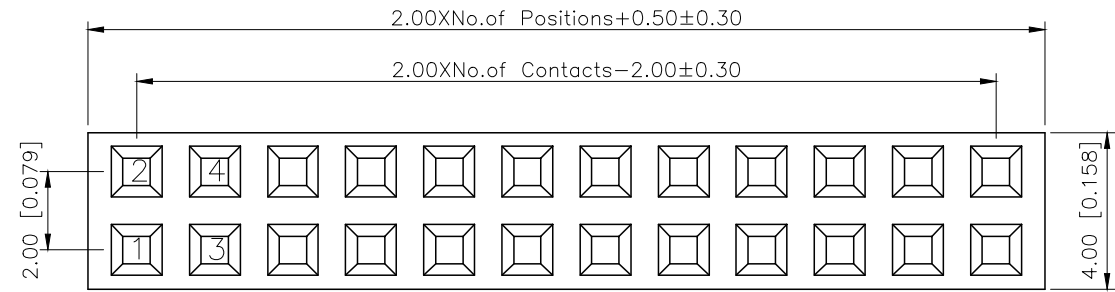

Specifications:


规格:

Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range:-40℃+105℃
温度范围: -40℃+105℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance:≤20mΩ
接触电阻: ≤20mΩ
Material:PA6T UL94V-0
材质: PA6T UL94V-0
Plating Category:1U"Gold
镀层: 1U"Gold
Wave soldering temperature:255±5℃, 10S
波峰焊温度: 255±5℃, 10S

PART NO.:

X4621 F V-2xXX-C43 D28
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:F-Female
③Welding Board Angle:V-Stright 180°
④Row No.Pin No:2xXX-2x01P~2x40P
⑤Plastic Height:C=4.3mm
⑥Pin Length:D=2.8mm

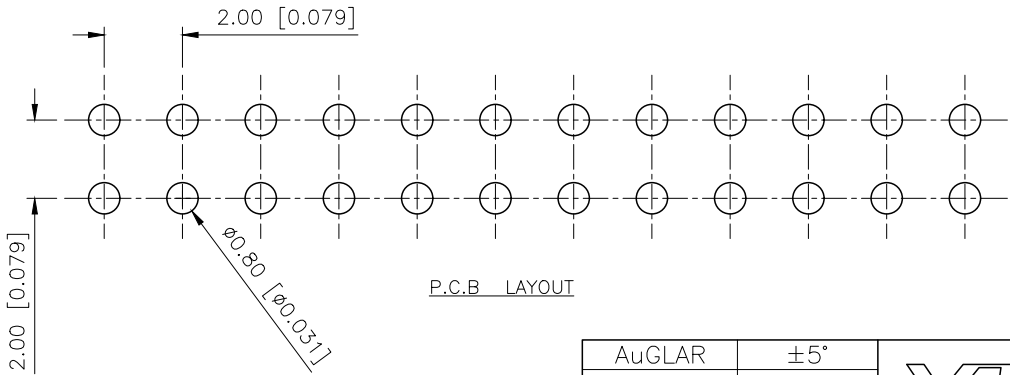

X4621FV-2xXX-C43D28	PA6T	Brass	X4621W
PART NO	Material	Material(Pin)	Suitable XKB Wafer

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEWS	MODEL TYPE: 2.0mm BTB Connector
CHECKED		UNIT: mm/in	PART NO.: X4621FV-2xXX-C43D28
APPROVED		SIZE: A4	DWG NO.: