


PART NUMBER	TITLE	CABLE DESCRIPTION	LENGTH 'L'	CABLE COLOR
2174801222	MINIFIT SR. F-F 150MM 8 AWG LEAD BK Au	1X8AWG DISC PVC BK UL 10669	150±5	BLACK
2174801223	MINIFIT SR. F-F 225MM 8 AWG LEAD BK Au	1X8AWG DISC PVC BK UL 10669	225±5	BLACK
2174801224	MINIFIT SR. F-F 300MM 8 AWG LEAD BK Au	1X8AWG DISC PVC BK UL 10669	300±5	BLACK
2174801225	MINIFIT SR. F-F 450MM 8 AWG LEAD BK Au	1X8AWG DISC PVC BK UL 10669	450±5	BLACK
2174802222	MINIFIT SR. F-F 150MM 8 AWG LEAD RD Au	1X8AWG DISC PVC RD UL 10669	150±5	RED
2174802223	MINIFIT SR. F-F 225MM 8 AWG LEAD RD Au	1X8AWG DISC PVC RD UL 10669	225±5	RED
2174802224	MINIFIT SR. F-F 300MM 8 AWG LEAD RD Au	1X8AWG DISC PVC RD UL 10669	300±5	RED
2174802225	MINIFIT SR. F-F 450MM 8 AWG LEAD RD Au	1X8AWG DISC PVC RD UL 10669	450±5	RED

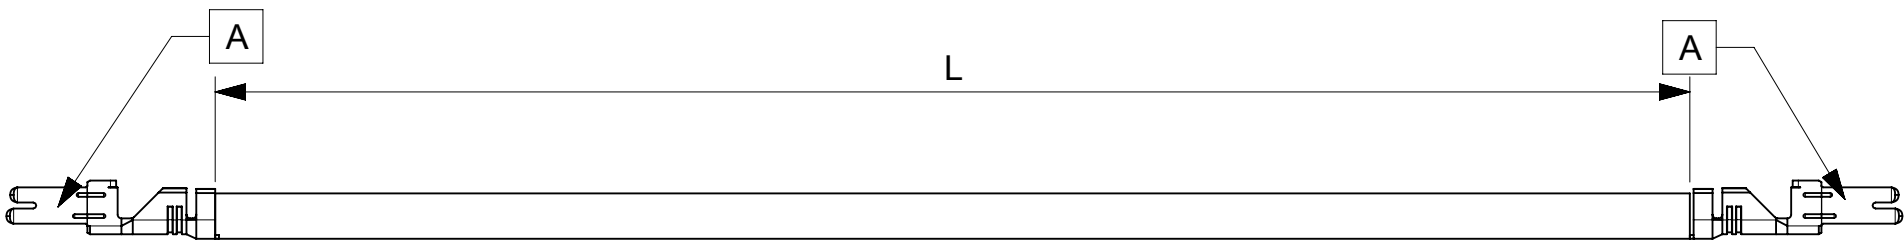

ITEM	PART#	DESCRIPTION	QTY	UOM
A	428150032	Mini Fit Sr Female Term 8 AWG Sau	2	PC

NOTES:

1. Crimping to be done as per Molex standards.
2. The product specification relies on the terminals & wire spec.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2021/02/05	A	INITIAL RELEASE	AS20
DOCUMENT STATUS	P1	RELEASE DATE	2021/02/05 14:38:06

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:								
	DIMENSION UNITS	SCALE							EC NO: 654859		
$\frac{F}{A} = 0$	mm	NTS	DRWN: AS20		2021/02/05						
$\frac{F}{E} = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: RDESAI01		2021/02/05						
$\frac{F}{P} = 0$	ANGULAR TOL ± °		APPR: RDESAI01		2021/02/05						
DIVISIONAL SYMBOLS	4 PLACES	±	INITIAL REVISION:		DOCUMENT NUMBER						
	3 PLACES	±	DRWN: AS20		2021/02/05		2174801222		DOC TYPE	DOC PART	REVISION
	2 PLACES	±	APPR: RDESAI01		2021/02/05		PSD		000	A	
	1 PLACE	±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER	
0 PLACES	±			A4-SIZE	217480	SEE TABLE	GENERAL MARKET		1 OF 1		