

# CUC-IND-J1ST-S/R4LS-S - RJ45 PCB connectors



1321106

<https://www.phoenixcontact.com/us/products/1321106>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



RJ45 PCB connectors, design: RJ45, degree of protection: IP20, number of positions: 8, 10 Gbps, material: Metal, connection method: THR reflow/THT wave, Short solder contacts

## Your advantages

- Ideal for demanding applications due to the high shock and vibration resistance as well as the extended temperature range
- 360° shielding ensures reliable transmission, even in industrial applications
- Housing shield springs enable an optimized EMC shielding concept
- Enables data transmission rates of up to 10 Gbps
- Automated handling process thanks to reflow capability
- The extended temperature range from -40°C to +105°C enables use in demanding industrial applications
- Tape-on-reel packaging

## Commercial data

Item number	1321106
Packing unit	84 pc
Minimum order quantity	84 pc
Sales key	AB12
Product key	ABNADA
GTIN	4063151607906
Weight per piece (including packing)	9.2 g
Weight per piece (excluding packing)	9.2 g
Customs tariff number	85366930
Country of origin	CN

1321106

<https://www.phoenixcontact.com/us/products/1321106>

## Technical data

### Product properties

Product type	Data connector (device side)
Type	RJ45
Number of positions	8
Connection profile	RJ45
Type of packaging	Tape and Reel
[W] tape width	44.00 mm
[A] coil diameter	330.00 mm
[W2] coil overall dimension	50.40 mm
Housing shield springs	No
Number of slots	1
Type	Socket
Shielded	yes

### Data management status

Article revision	00
------------------	----

### Insulation characteristics

Overvoltage category	I
Degree of pollution	2

### Electrical properties

Rated voltage (III/2)	72 V DC
Rated surge voltage	1.5 kV DC
Rated surge voltage (III/3)	1.5 kV
Rated surge voltage	1 kV DC
Rated current	1.5 A
Frequency range	10 Hz ... 500 Hz
Insulation resistance	> 500 MΩ
Test voltage	1 kV DC
Test voltage Core/Core	1 kV DC
Test voltage Core/Shield	1.50 kV DC
Transmission medium	Copper
Transmission speed	10 Gbps
Power transmission	PoE++

### Connection data

#### Connection technology

Connection method	THR reflow/THT wave
-------------------	---------------------

### Dimensions

Width	16.1 mm
-------	---------

1321106

<https://www.phoenixcontact.com/us/products/1321106>

Height	14.7 mm
Length	17.5 mm
Installed height	14.30 mm
Orientation to	180.00 °
Data pin length	2.00 mm

### Material specifications

Material	Au (1.27 µm/50 µ") (Metal surface contact area (top layer))
	Ni (Metal surface contact area (middle layer))
	Au (Metal surface soldering area (top layer))
	Ni (Metal surface soldering area (middle layer))
	Copper alloy (Housing (shielding))
Flammability rating according to UL 94	V0
Housing material	Metal
Housing surface material	Ni
Contact material	Copper alloy
Contact surface material	Gold

### Cable/line

Test voltage Core/Core	1 kV DC
Test voltage Core/Shield	1.50 kV DC
Halogen-free	yes

### Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	> 750
Insertion force per signal contact	< 20.00 N
Extraction force per signal contact	< 20 N

### Environmental and real-life conditions

#### Test specification

Frequency	10-500 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm
Acceleration	50.00 m/s <sup>2</sup>
Test duration	20.00 s

#### Test specification

Specification	IEC60068-2-27
Acceleration	295.00 m/s <sup>2</sup>

#### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 105 °C

# CUC-IND-J1ST-S/R4LS-S - RJ45 PCB connectors



1321106

<https://www.phoenixcontact.com/us/products/1321106>

Ambient temperature (storage/transport)	-40 °C ... 105 °C
---	-------------------

## Mounting


Mounting type	THR soldering
---------------	---------------

## Processing notes

Moisture Sensitive Level	MSL 1
Classification temperature $T_c$	260 °C
Solder cycles in the reflow	3

Drawings

Diagram

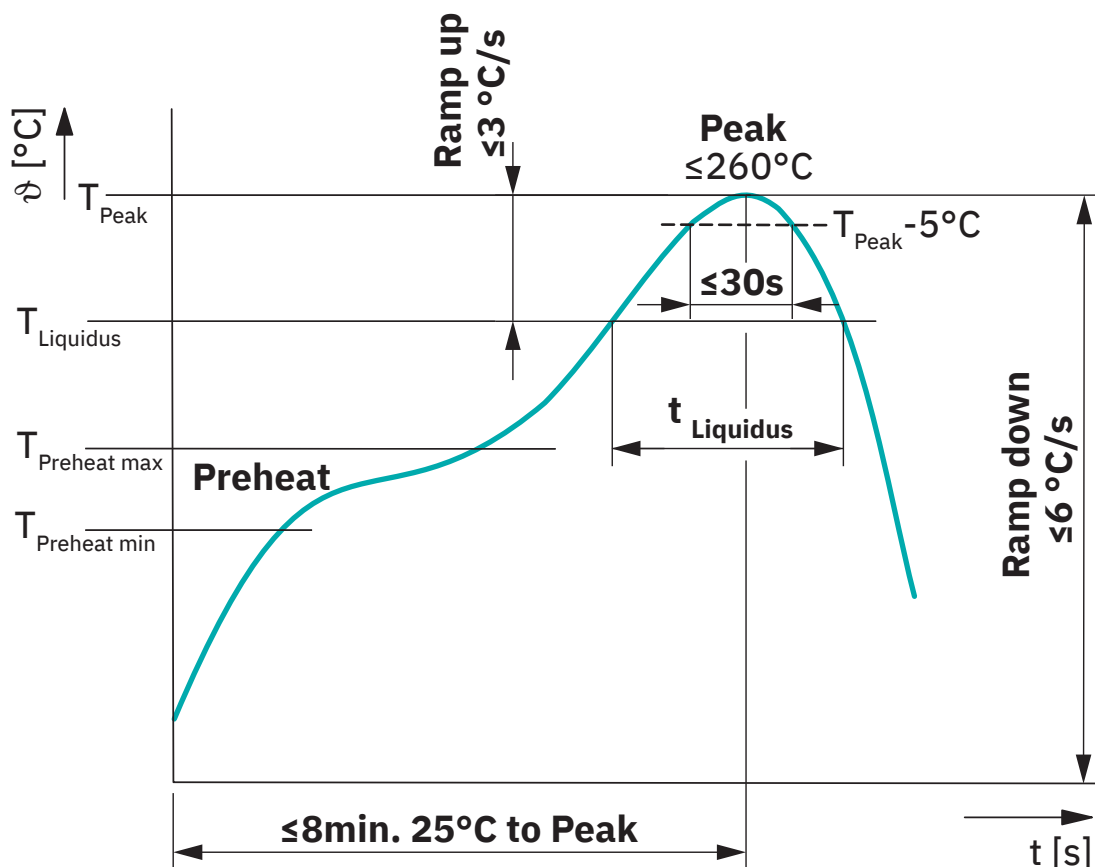

Classification reflow soldering profile

# CUC-IND-J1ST-S/R4LS-S - RJ45 PCB connectors



1321106

<https://www.phoenixcontact.com/us/products/1321106>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1321106>



**cUL Recognized**  
Approval ID: FILE E 335024



**UL Recognized**  
Approval ID: FILE E 335024

**cULus Recognized**

# CUC-IND-J1ST-S/R4LS-S - RJ45 PCB connectors



1321106

<https://www.phoenixcontact.com/us/products/1321106>

## Classifications

### ECLASS

ECLASS-11.0	27440223
ECLASS-12.0	27440223
ECLASS-13.0	27460201

### ETIM

ETIM 9.0	EC002637
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# CUC-IND-J1ST-S/R4LS-S - RJ45 PCB connectors



1321106

<https://www.phoenixcontact.com/us/products/1321106>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)