
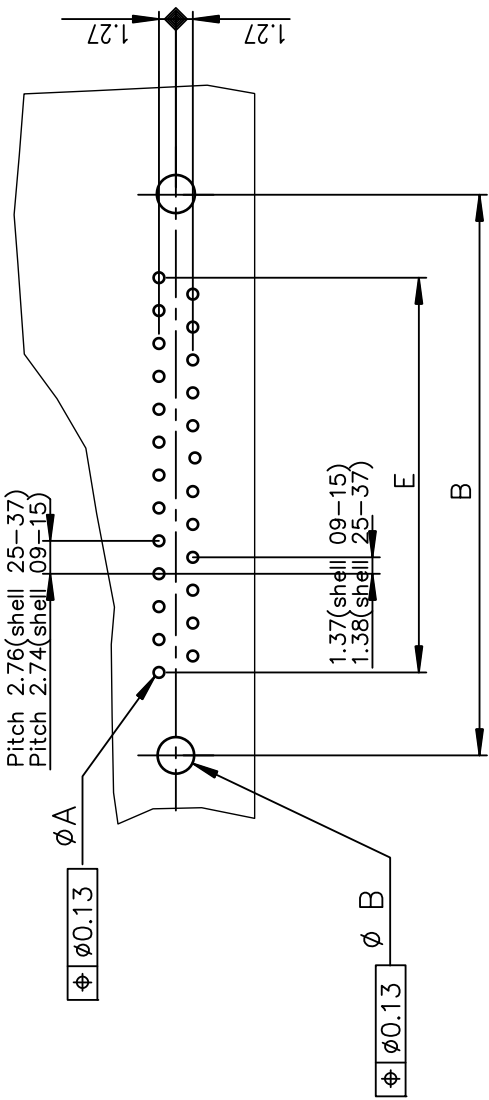


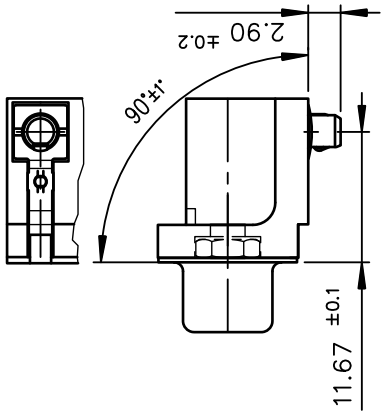

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

SHELL	A $\pm$ 0.38	B $\pm$ 0.12	C $\pm$ 0.10	D $\pm$ 0.25	E $\pm$ 0.07	TIN LEAD	TIN LEAD	LEAD FREE	LEAD FREE
09	30.81	24.99	18.00	16.21	10.96	D09S81C4G100	D09S81C6G100	D09S81C4G100LF	D09S81C6G100LF
15	39.14	33.32	26.32	24.54	19.18	D15S81C4G100	D15S81C6G100	D15S81C4G100LF	D15S81C6G100LF
25	53.03	47.04	40.04	38.25	33.12	D25S81C4G100	D25S81C6G100	D25S81C4G100LF	D25S81C6G100LF
37	69.32	63.50	56.50	54.71	49.68	D37S81C4G100	D37S81C6G100	D37S81C4G100LF	D37S81C6G100LF
						Gold flash	0.76 μ gold	Gold flash	0.76 μ gold

mat'l. code				—		surface ISO 1302		tolerance ISO 406 ISO 1101		projection 		product family D—SUB	
ltr		ecn no	dr	date		tolerances unless otherwise specified						title	
G		ELX-I-18050	MP	2014/06/23		angles		linear		MM		FEMALE CONNECTOR DELTA-DEUROPE RIGHT ANGLED PRESS FIT	
						0°±2°				scale 2:1			
						dr		PESSON		1996/12/06		dwg no	
						engr		MITHUN PAUL		2014/06/23		sheet 1 of 1	
						chr		ALIAS BABU		2014/06/23		C01—8646—0522	
						appd		BIJU K PAUL		2014/06/23		A3	
sheet index		revision		G								type	
		sheet		1								Product Customer Drawing	