


## Messleitung LK4...

Hochflexibel, beidseitig mit stapelbarem  
Ø 4 mm-Lamellenstecker.



Bestell-Nr.	Typ	Bemessungsspannung/ -strom	Leitung	Benutzer- information		Längen L [cm]	*Standardfarben
28.0060-□*	LK410	30 VAC / 19 A 60 VDC / 19 A	PVC 1,0 mm <sup>2</sup>	i096	Au	100	21 22
28.0061-□*	LK410/SIL	30 VAC / 19 A 60 VDC / 19 A	SIL 1,0 mm <sup>2</sup>	i096	Au	050	21 22
28.0073-□*	LK425-A	30 VAC / 32 A 60 VDC / 32 A	PVC 2,5 mm <sup>2</sup>	i099	Au	050 100 200	21 22 23
28.0074-□*	LK425-A/SIL	30 VAC / 32 A 60 VDC / 32 A	SIL 2,5 mm <sup>2</sup>	i099	Au	100	21 22

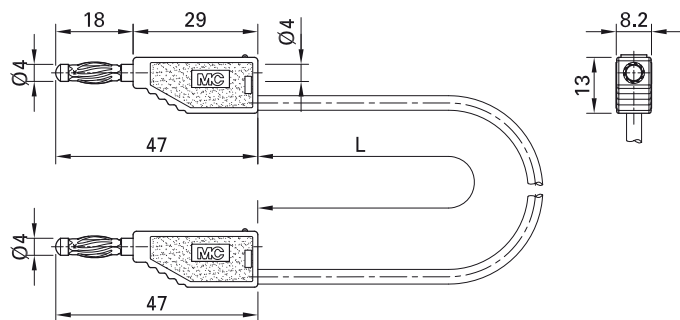

Optionale Farben 20 23 24 25 26 27 28 29

Optionale Längen auf Anfrage

Weitere Informationen, Seite 6



Benutzerinformation **i096**, **i099**

[www.staubli.com/electrical](http://www.staubli.com/electrical)