

205975-1 ✓ ACTIVE

AMP

TE Internal #: 205975-1


Sealing Plug, Silicone Rubber, Red, -65 – 125 °C [-85 – 257 °F]

Operating Temperature

[View on TE.com >](#)



Connectors > Connector Accessories > Connector Seals & Cavity Plugs

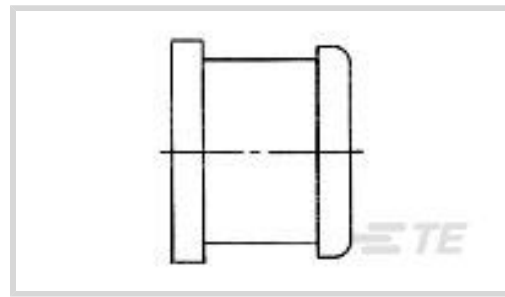

Connector Seal & Plug Type: **Sealing Plug**

Primary Product Material: **Silicone Rubber**

Primary Product Color: **Red**

Operating Temperature (Max): **125 °C [257 °F]**

Operating Temperature Range: **-65 – 125 °C [-85 – 257 °F]**

Features

Product Type Features

Connector Seal & Plug Type	Sealing Plug
----------------------------	--------------

Body Features

Primary Product Material	Silicone Rubber
--------------------------	-----------------

Primary Product Color	Red
-----------------------	-----

Contact Features

Compatible With Contact Size	5
------------------------------	---

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
-----------------------------	----------------

Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]
-----------------------------	----------------------------

Packaging Features

Packaging Method	Package
------------------	---------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241)
--	--



Candidate List Declared Against: JAN 2024
(240)

Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Customers Also Bought

TE Part #7-1676966-5
SMW2 120R 5%

TE Part #292227-5
1.5 MINI CT SGL H SMT W BOSS 5

TE Part #208264-2
SKT CONTACT SZ 22



TE Part #9-146309-0
80 MODII HDR DRRA B/A .100CL

TE Part #3-2176328-7
CRGP 1206 10K 1%

TE Part #3-2176331-1
CRGP 2512 3K3 1%

TE Part #1-535512-8
16 MODII HORZ DR CE EESS .100

TE Part #ZPF000000000103303
787-8009-00

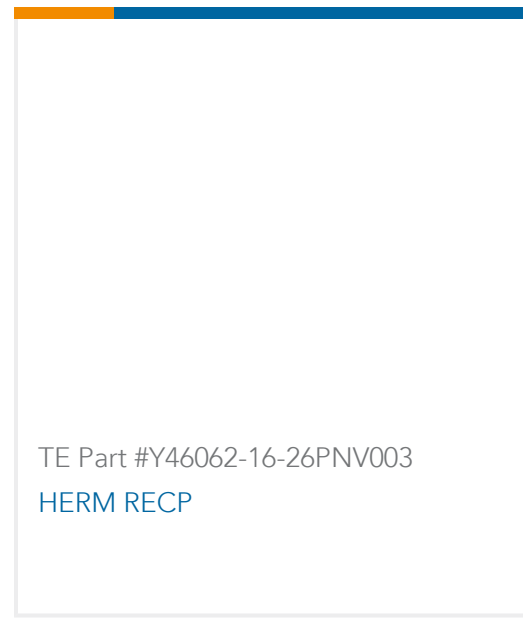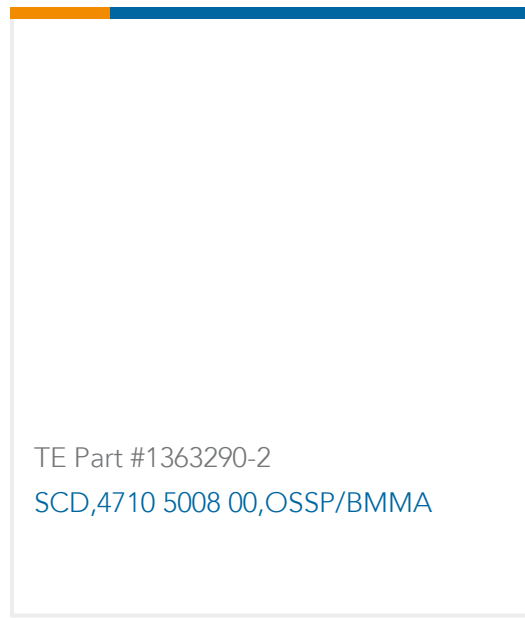

Documents

Product Drawings

[SEALING PLUG,COAX,ARINC](#)

English

CAD Files

Customer View Model

[ENG_CVM_205975-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_205975-1_A.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_205975-1_A.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[ARINC 600 Next Generation Receptacle Connector](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English

[AMP RM AND RME SERIES CONNECTORS WITH SIZE 5 AND 9 COAXIAL CONTACTS](#)

English