
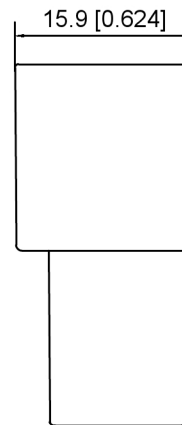


Current rating:3A AC/DC
 额定电流: 3A AC/DC
 Temperature range:-40℃-+125℃
 温度范围: -40℃-+125℃

K 284162 H F - XX - N0 X
 ① ② ③ ④ ⑤ ⑥ ⑦

- 1.K: XKBTEK-Car Connector
- 2.XKB Series No
- 3.Category:H-Housing
- 4.Category:F-Female Housing
- 5.Row No.Pin No:XX-12 Pin
- 6.Material:N0-PA66 UL94V-0
- 7.Color:W-White ; G-Green

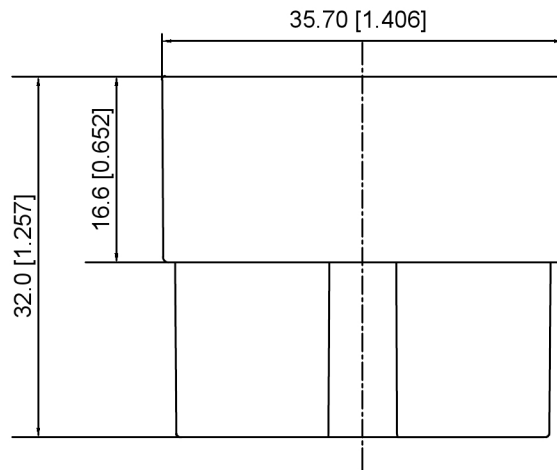

K284162HF-XX-N0X	PA66	K284162HM	K284162TM
PART	Material	Suitable XKB Housing	Suitable XKB Terminal

DSND	SCALE: N/A	MODEL TYPE: 5.0mm automotive connector
DWN	VIEW:	PART NO.: K284162HF-XX-N0X
CHKD	UNIT: mm/in	DWG NO.: X-K284162HF-XX-N0X
APPD	SIZE: A4	WEIGHT SHEET REVISION

MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGLAR	±5°
ΔX					L ≤ 4	±0.2
ΔX					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5



XKB INDUSTRIAL PRECISION CO., LIMITED