


Wiring Devices

Industrial Grade Straight-Blade Plugs and Connectors (cont.)

Leviton® Nylon Corrosion-Resistant Straight-Blade Plugs and Receptacles

- All metal parts are electroless nickel-plated
- Connector power contacts are heavy-duty, one-piece, triple-wipe brass, set in deep pockets to resist rough use
- Captive terminal screws are color-coded for easy wiring identification
- UL® Listed and CSA Certified

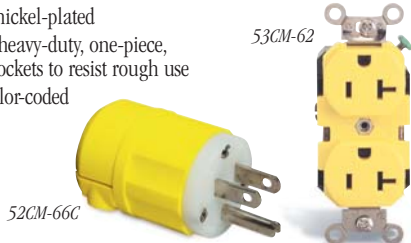

WESCO Part No.	Mfr.'s Model No.	Volts	NEMA	Cord Diameter	Color
15 Amp, 2-Pole 3-Wire Grounding Plug 078477-79524	52CM-66C	125	5-15P	0.240-0.655	Yellow
15 Amp, 2-Pole 3-Wire Duplex Grounding Receptacle 078477-82077	53CM-62	125	5-20R	—	Yellow

Bryant Corrosion-Resistant 2-Pole, 3-Wire Watertight Plugs and Connectors

- High-visibility yellow, watertight thermoplastic elastomeric construction
- Rugged PBT interiors provide excellent resistance to moisture and temperature extremes
- Accepts multiple cord diameters
- Individual neoprene bushings provide watertight sealing
- Keyed body and cover for proper alignment
- Recommended where moisture exists or casual submersion is possible
- Meets NEC requirements for "Wet & Damp Locations"
- UL® Listed, CSA Certified



WESCO Part No.	Mfr.'s Model No.	Description
Straight Blade — 15 Amp, 125V, NEMA 5-15		
781786-18730	14W47BRY	Plug
781786-18735	15W47BRY	Connector
Locking Blade — 15 Amp, 125V, NEMA L5-15		
781786-18740	24W47BRY	Plug
781786-18745	25W47BRY	Connector
Locking Blade — 20 Amp, 125V, NEMA L5-20		
781786-18742	26W47BRY	Plug
781786-18747	27W47BRY	Connector

Bryant Tech-Spec® 2-Pole, 3-Wire Grounding Attachment Plugs and Connectors



- Made of impact/chemical-resistant nylon/construction with automatic cord grip
 - Pre-attached TPE dust seal helps prevent contaminants from entering wiring chamber
 - Transparent terminal cover enables instant visual inspection for proper terminations
 - Tapered individual wire pockets help prevent flashover and speed wiring termination
 - Single-side terminal screws reduce wiring time and are color coded
 - UL Listed (except 5393) and CSA Certified
- Note: Not all Tech-Spec features apply to certain models

WESCO Part No.	Mfr.'s Model No.	Description	Cord Diameter (in.)
15 Amp, 125V, NEMA 5-15			
781786-17408	BRY5266NP	Black/White Plug	0.245-0.655
781786-17409	BRY5269NC	Black/White Connector	0.245-0.655
781786-65960	5266NPSY	Sentinel Yellow Plug	0.245-0.655
781786-65970	5269NCSY	Sentinel Yellow Connector	0.245-0.655
781786-17410	5295	Black/White Angle 12-Position Plug	0.300-0.625
781786-18760	B5295T	Transparent, Angle 12-Position Plug, Nylon/Polycarbonate, Display Pak	0.300-0.625
781786-73162	5965B	Black Thermoplastic Plug	0.245-0.655
781786-73165	5969B	Black Thermoplastic Plug	0.245-0.655
15 Amp, 250V, NEMA 6-15			
781786-17426	BRY5666NP	Black/White Plug	0.245-0.655
781786-17428	BRY5669NC	Black/White Connector	0.245-0.655
20 Amp, 125V, NEMA 5-20			
781786-62551	BRY5366NP	Black/White Plug	0.245-0.655
781786-62553	BRY5369NC	Black/White Connector	0.245-0.655
781786-73127	5369B	Black Thermoplastic Connector	0.245-0.655
781786-73162	5364B	Black Thermoplastic Plug	—
20 Amp, 250V, NEMA 6-20			
781786-17421	BRY5466NP	Black/White Plug	0.245-0.655
781786-17423	BRY5469NC	Black/White Connector	0.245-0.655
781786-17424	5475N	Black/White, 12-Position Angle Plug	0.300-0.625

Cooper Wiring Devices Industrial Specification Grade AutoGrip™ Plugs and Connectors

Automatic, internal cord grip saves wiring time

- Nylon dead-front construction
- Back wire terminal clamps for easy, secure wiring
- Individual wiring compartments with tapered channel for easy insertion of wires
- Neoprene gasket provides terminal protection from dust and debris
- AutoGrip™ design clamps cord during assembly
- Smooth, tapered body eliminates snagging
- Corrosion-resistant version has nickel-plated contacts and terminals
- Cord diameter: 0.25"-0.656"
- Combination head screws standard — slot/Phillips in the U.S.
- Add -C to catalog number for Canadian screws — slot/Robertson head combination (contact your local WESCO Branch for ordering information)
- UL 498, CSA 22.2



COOPER Wiring Devices

NEW Product

WESCO Part No.	Mfr.'s Model No.	Description	Ratings	NEMA	Color
040893-66708	4721N	Standard Locking Plug	15A, 125 VAC	L5-15P	Black & White
040893-66715	4731N	Standard Locking Connector	15A, 125 VAC	L5-15R	Black & White
040893-66712	4721NCR	Corrosion-Resistant Locking Plug	15A, 125 VAC	L5-15P	Yellow
040893-66716	4731NCR	Corrosion-Resistant Locking Connector	15A, 125 VAC	L5-15R	Yellow
040893-67114	IG4721N	Isolated Ground Locking Plug	15A, 125 VAC	L5-15P	Orange
040893-01760	5266N	Standard Straight Blade Plug	15A, 125 VAC	5-15P	Black & White
040893-01780	5269N	Standard Straight Blade Connector	15A, 125 VAC	5-15R	Black & White
040893-01765	5266NCR	Corrosion-Resistant Straight Blade Plug	15A, 125 VAC	5-15P	Yellow
040893-12020	5269NCR	Corrosion-Resistant Straight Blade Connector	15A, 125 VAC	5-15R	Yellow
040893-04515	IG5266N	Isolated Ground Straight Blade Plug	15A, 125 VAC	5-15P	Orange
040893-02155	5666N	Standard Straight Blade Plug	15A, 250 VAC	6-15P	Black & White
040893-02160	5669N	Standard Straight Blade Connector	15A, 250 VAC	6-15R	Black & White
040893-01805	AH5366N	Standard Straight Blade Plug	20A, 125 VAC	5-20P	Black & White
040893-01825	5369N*	Standard Straight Blade Connector	20A, 125 VAC	5-20R	Black & White
040893-01810	5366NCR	Corrosion-Resistant Straight Blade Plug	20A, 125 VAC	5-20P	Yellow
040893-01890	5369NCR*	Corrosion-Resistant Straight Blade Connector	20A, 125 VAC	5-20R	Yellow
040893-12450	5366NY	Standard Straight Blade Plug	20A, 125 VAC	5-20P	Black & White
040893-62592	5369NY*	Standard Straight Blade Connector	20A, 125 VAC	5-20R	Black & White
040893-01905	5466N	Standard Straight Blade Plug	20A, 250 VAC	6-20P	Black & White
040893-01910	5469N*	Standard Straight Blade Connector	20A, 250 VAC	6-20R	Black & White

* Not CSA Listed

