


# Accessories

Easily integrate Contura products into your system, with Contura Accessories



## Contura Connectors




Q.C. SELECTION GUIDE						
COMPANY SERIES	PART NO		WIRE RANGE		ORIENTATION	
	PLAIN BRASS	TIN PLATED BRASS	AWG	MM <sup>2</sup> (REF)		
PACKARD 58 SERIES	02965580		12	3.0	B	
	02965471	12010601	(2)16-14	(2)1.0-2.0		
	02965470		16-14	1.0-2.0		
	02965469	06288318	20-18	.5-.8		
PACKARD METRI-PACK 630 SERIES		12084590	105.0		A	
		12052224	123.0			
		12015870	16-14	1.0-2.0		
		12020035	(2)22-18	(2).5-.8		
		12015832	12015869	20-18		.5-.8
		12052222	20-22	.35-.5		
AMP 250 SERIES FASTIN-FASTON	60253-1	60253-2	16-12	1.3-3	B	
	42100-1	42100-2	18-14	.8-2		
	60295-1	60295-2	22-18	.3-9		

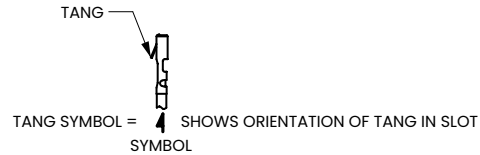



NOTE: Consult Delphi Packard and/or Amp on actual part numbers and availability. AMP is a registered trademark of AMP Inc. Harrisburg, PA. Delphi Packard is a registered trademark of Delphi-Packard Electrical Systems Warr




VC1 CONNECTOR HOUSING





MARKING DETAIL REAR VIEW




VC2 CONNECTOR HOUSING (For AMP terminals only)



MARKING DETAIL REAR VIEW




VCH CONNECTOR HOUSING




MARKING DETAIL REAR VIEW

## Contura X Boot (P/N VB1-01)



## Contura II, III, IV, V, VI & VII Actuator Removal Tool (P/N VRT)



## Additional V-Series Ratings

- 1 .4VA @ 28VDC Resistive
- 4 10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, No Agency Listings
- 5<sup>1</sup> 10A 250VAC 1/2 HP, 15A 125 VAC 1/2 HP, UL Recognized, CSA Certified
- B 15A 24V
- C 20A 18V
- D 20A 12V
- E 20A 14V, 10A 14VT (circuits 1, 4, A, & D only)
- F 10A 14V, 6A, 14VT (circuit G only)
- G 20A 6V
- H 20A 3V
- L<sup>2</sup> 15A 125 VAC, 10A 250VAC, 1/2 HP 125-250 VAC; 6A 125 VAC L
- M .4VA/20A 12V (combi-contact) (combination gold/silver contacts for borderline dry circuit applications)
- N .4VA/15A 24V (combi-contact) (combination gold/silver contacts for borderline dry circuit applications)

### NOTES

Consult factory to determine availability for individual circuits and their HP rating.


1. Not available with Contura 7 or 14 rocker styles.
2. Rating L available with circuits 1, 4, A & D only.

# Accessories


## Contura Mounting Panels Dimensional Specifications: in. [mm]

**MOUNTING PANEL**  
For additional units, add 1.03 [26.2] per unit. For more than 2 V-Series Switches, add middle section. Available in panel Thicknesses listed below. Consult factory.


MOUNTING PANEL THICKNESS	
.62	.87
[15.7]	[21.9]
.98	.250
[24.9]	[6.35]
.25	.375
[6.35]	[9.52]




**VMS MOUNTING PANEL HOLE**




**MOUNTING PANEL OPENING (2) UNITS**




**VME MOUNTING PANEL END**




**VMM MOUNTING PANEL MIDDLE**



**VMS MOUNTING PANEL**




**VM3 MOUNTING PANEL**

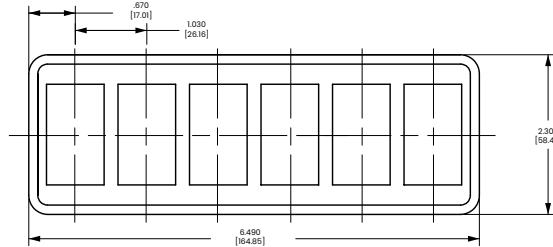


**VM6 MOUNTING PANEL**


## Contura Hole Plug Dimensional Specifications: in. [mm]




**VHP CONTURA II,III HOLE PLUG**





**VHP CONTURA II,III HOLE PLUG**




**VHI STANDARD HOLE PLUG (No wing serrations) (With VC1 connector attached)**



**VH2 STANDARD HOLE PLUG (With wing serrations)**





**VH3 CONTURA IV HOLE PLUG (No wing serrations)**




**VH4 CONTURA IV HOLE PLUG (With wing serrations)**



**DETAIL VIEW VH1, VH3 & VH5 HOLE PLUGS (No wing serrations for ease of removal)**



**VH5 CONTURA V HOLE PLUG (No wing serrations)**



**VH6 CONTURA V HOLE PLUG (With wing serrations)**



**DETAIL VIEW VH2, VH4 & VH6 HOLE PLUGS (With wing serrations)**