

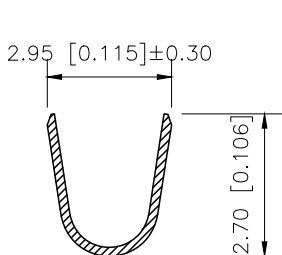
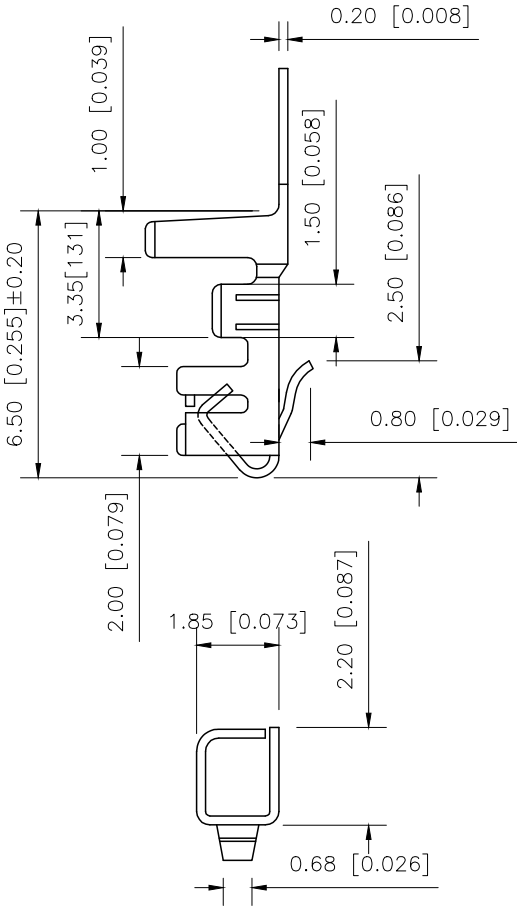


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		图框升级整理图面	2024.08.07	阿 树

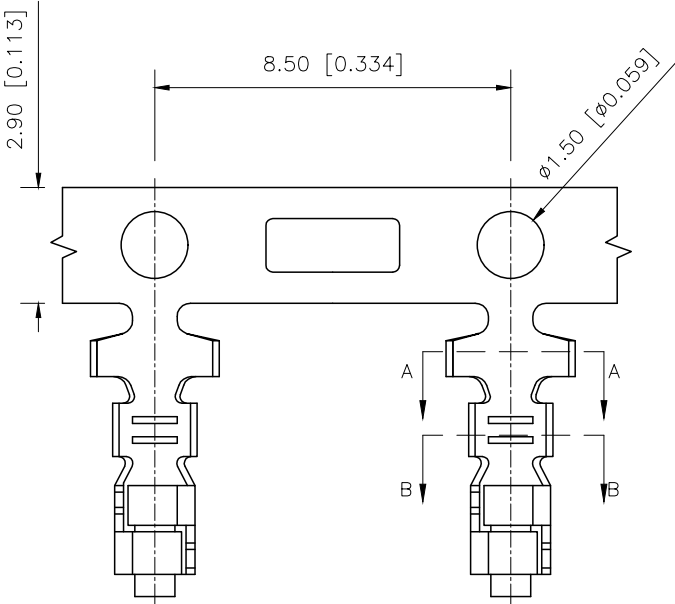

SECTION:A-A
SCALE:1:1

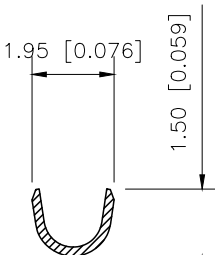


SECTION:B-B
SCALE:1:1

Specifications:
规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range:-25℃~+85℃
温度范围: -25℃~+85℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:20mΩ Max
接触电阻: 20mΩ Max

PART NO.:
X8821 I F P-SN
① ② ③ ④ ⑤

- ① Series No
② Category:T-Terminal
③ Shape:F-Female Terminal
④ Material:P-Phosphor Bronze
⑤ Plating:SN-Tin Plated

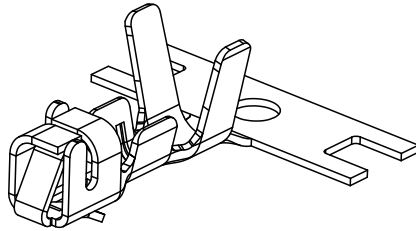

X8821TF-PSN	Phosphor Bronze	AWG#22~28	X8821H
PART NO	Material	Wire Range	Suitable XKB Housing

ANGULAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



XKB INDUSTRIAL PRECISION CO.,LIMITED

DESIGN	阿 树	VIEW:		MODEL TYPE: 2.50 mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X8821TF-PSN
APPROVED		SIZE:	A4	DWG NO.:

SCALE	PAGE	REVISION
N/A	1/1	A1