

SPECIFICATION CONTROL DRAWING

55PC6121

TITLE WIRE, RADIATION-CROSSLINKED, MODIFIED, ETFE-INSULATED,
TIN-COATED COPPER, GENERAL PURPOSE, LIGHT AIRFRAME, 600 VOLT


Date 03-16-00

Revision C

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

CONDUCTOR - TIN-COATED COPPER
30 MICRO INCH THICKNESS MINIMUM

INSULATION - RADIATION-CROSSLINKED,
MODIFIED ETFE
COLOR - White with 2 black stripes

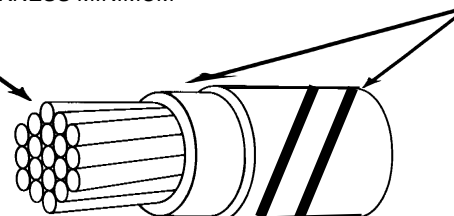

CONSTRUCTION DETAILS

PART NUMBER	WIRE SIZE (AWG)	CONDUCTOR STRANDING (number x AWG)	CONDUCTOR DIAMETER (in.)			FINISHED WIRE						
			LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	MAXIMUM RESISTANCE AT 20°C (ohms/1000 ft.)	DIAMETER (in.)			WEIGHT (lbs/1000 ft.)		
							LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC6121-22-900	22	19 x 34	.0285	.0293	.0301	16.2	.0438	.0455	.0472	2.74	2.90	3.06
55PC6121-20-900	20	19 x 32	.0365	.0375	.0385	9.88	.0523	.0540	.0557	4.19	4.38	4.57
55PC6121-18-900	18	19 x 30	.0452	.0464	.0476	6.23	.0616	.0635	.0654	6.28	6.59	6.90

WIRE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour

IDENTIFICATION AND COLOR STRIPING DURABILITY:

125 cycles (250 strokes) (minimum), 500 g weight

INSULATION ELONGATION AND TENSILE STRENGTH:

Total Insulation,

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

INSULATION FLAWS:

Impulse Dielectric Test, 8.0 kV (peak)

INSULATION THICKNESS: .008 in. (nominal) total insulation

SHRINKAGE: 230 ± 3°C for 1 hour, 0.125 in.(maximum) in 12 in.

SPOOLING:

Minimum lengths, 500 ft.

Place orange flag on each splice

STRIPE WIDTH: .022 in. (maximum)

STRIPE INTERVALS: Per MIL-STD-681 (2 inch maximum)

VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):

2500 volts (rms)

MARKING: Mark wire in green ink at 1.5 inch (nominal) distance

between marks. Example: " 18 AWG "

Mark shall be read horizontally for AWG size 20 and 18

Mark shall be read vertically for AWG size 22

NOTES: - THIS WIRE MEETS ALL REQUIREMENTS OF BMS13-48T10C1, EXCEPT IDENTIFICATION AS MODIFIED HEREIN.
- STRIPING INK MEETS RAYCHEM SPECIFICATION RT1404 WHICH INCLUDES IMMERSSED I.R. AND DWV TESTING.

COLORS, STRIPES AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

Raychem

300 Constitution Drive, Menlo Park, California 94025
1-800-2 Raychem Fax: 1-650-361-6297

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[55PC6121-20-900](#)