

Surface Mount

Monolithic Amplifier

DC-2 GHz

Product Features

- Wideband, DC to 2 GHz
- Cascadable ceramic package
- Internally Matched to 50 Ohms
- Low noise figure, 6.5 dB typ.
- Excellent repeatability
- Aqueous washable
- Protected under US Patent 6,943,629

Typical Applications

- Cellular
- UHF/VHF
- Communication system
- Transmission receivers

General Description

RAM-2+ (RoHS compliant) is a wideband amplifier offering high dynamic range. It has repeatable performance from lot to lot. It is enclosed in a ceramic surface-mount package. RAM-2+ uses Darlington configuration and is fabricated using InGaP HBT technology. Expected MTBF is 2,200 years at 100°C case temperature.



Generic photo used for illustration purposes only



RAM-2+

CASE STYLE: AF190

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

simplified schematic and pin description

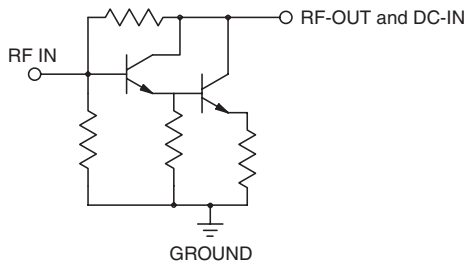

| Function | Pin Number | Description |
|------------------|------------|--|
| RF IN | 1 | RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation. |
| RF-OUT and DC-IN | 3 | RF output and bias pin. DC voltage is present on this pin; therefore a DC blocking capacitor is necessary for proper operation. An RF choke is needed to feed DC bias without loss of RF signal due to the bias connection, as shown in "Recommended Application Circuit". |
| GND | 2,4 | Connections to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance. |

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. D
ECO-003934
RAM-2+
200902
Page 1 of 4

Electrical Specifications at 25°C and 25mA, unless noted

| Parameter | Min. | Typ. | Max. | Units |
|---|---------------|------------------|------|-------|
| Frequency Range* | DC | | 2 | GHz |
| Gain | f=0.1 GHz | — | 12.5 | dB |
| | f=1 GHz | — | 11.8 | |
| | f=2 GHz | 8.5 ² | 11.0 | |
| Input Return Loss | f=DC to 2 GHz | | 21 | dB |
| Output Return Loss | f=DC to 2 GHz | | 15.5 | dB |
| Output Power @ 1 dB compression | f=1 GHz | | +4.5 | dBm |
| Output IP3 | f=1 GHz | | +17 | dBm |
| Noise Figure | f=1 GHz | | 6.5 | dB |
| Recommended Device Operating Current | | 25 | | mA |
| Device Operating Voltage | | 5.0 | | V |
| Device Voltage Variation vs. Temperature at 25 mA | | -2.7 | | mV/°C |
| Device Voltage Variation vs. Current at 25°C | | 16.7 | | mV/mA |
| Thermal Resistance, junction-to-case ¹ | | 145 | | °C/W |

*Guaranteed specification DC-2 GHz. Low frequency cut off determined by external coupling capacitors.

Absolute Maximum Ratings

| Parameter | Ratings |
|-----------------------|----------------|
| Operating Temperature | -54°C to 100°C |
| Storage Temperature | -65°C to 150°C |
| Operating Current | 60mA |
| Power Dissipation | 325mW |
| Input Power | 13dBm |

Note: Permanent damage may occur if any of these limits are exceeded.

These ratings are not intended for continuous normal operation.

¹Case is defined as ground leads.

²Full temperature range.

Notes


A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Product Marking



Markings in addition to model number designation may appear for internal quality control purposes.

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Performance data, graphs, s-parameter data set (.zip file)

Case Style: AF190

Ceramic surface-mount, .083 body diameter

Tape & Reel: F14


7" inch reels with 20, 50, 100, 200, 500, 1000 devices.

Suggested Layout for PCB Design: PL-254

Evaluation Board: TB-414-2+

Environmental Ratings: ENV08T6

Recommended Application Circuit

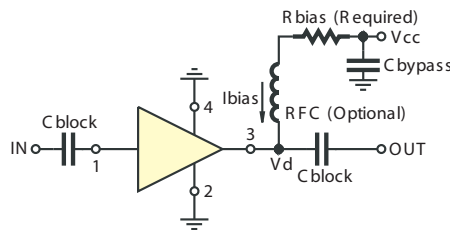

Test Board includes case, connectors, and components (in bold) soldered to PCB

| R BIAS | |
|--------|---|
| Vcc | "1%" Res. Values (ohms) for Optimum Biasing |
| 7 | 80.6 |
| 8 | 121 |
| 9 | 162 |
| 10 | 200 |
| 11 | 243 |
| 12 | 280 |
| 13 | 324 |
| 14 | 357 |
| 15 | 402 |

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



ESD Rating

Human Body Model (HBM): Class 1B (500 v to < 1000 v) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M1 (<100 v) in accordance with ANSI/ESD STM 5.2 - 1999

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



MMIC Amplifier

RAM-2+

Typical Performance Data

| FREQUENCY (MHz) | GAIN (dB) 25 mA | ISOLATION (dB) 25 mA | RETURN LOSS IN (dB) 25 mA | RETURN LOSS OUT (dB) 25 mA |
|--------------------|-----------------------|----------------------------|------------------------------------|-------------------------------------|
| 100 | 13.00 | 18.42 | 18.42 | 17.72 |
| 500 | 12.80 | 18.42 | 19.17 | 18.42 |
| 1000 | 12.50 | 17.72 | 20.00 | 18.42 |
| 1500 | 11.80 | 17.08 | 21.94 | 18.42 |
| 2000 | 11.00 | 16.48 | 24.44 | 17.72 |
| 2500 | 10.40 | 15.39 | 20.92 | 17.72 |
| 3000 | 9.40 | 14.42 | 17.08 | 17.72 |
| 3500 | 8.20 | 13.98 | 13.56 | 17.72 |
| 4000 | 7.30 | 13.56 | 11.37 | 18.42 |

REV. X1
RAM-2+
061031
Page 1 of 1





IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS 9100 CERTIFIED RoHS compliant
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Typical Performance Curves

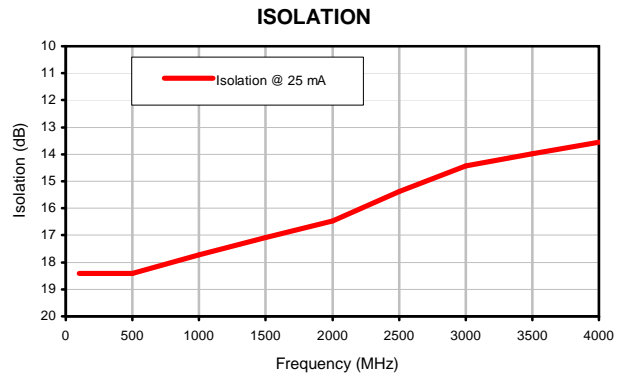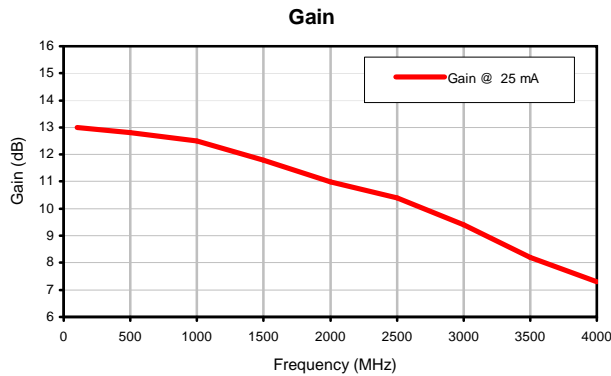

Outline Dimensions

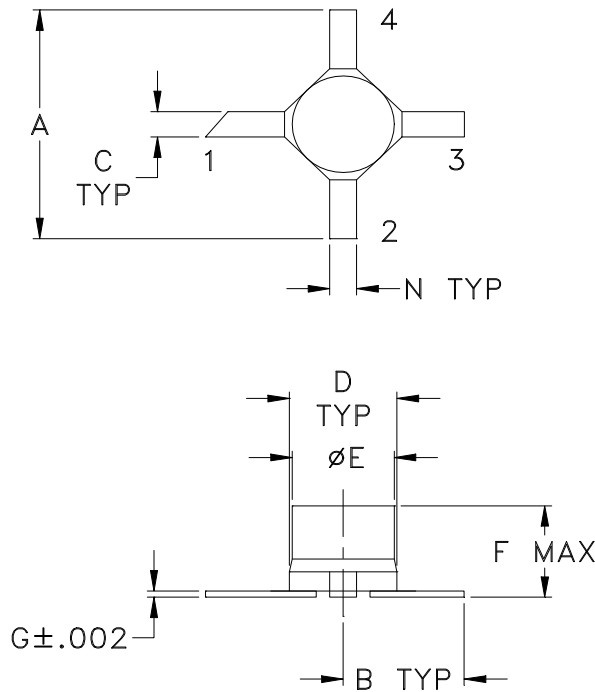

PCB Land Pattern

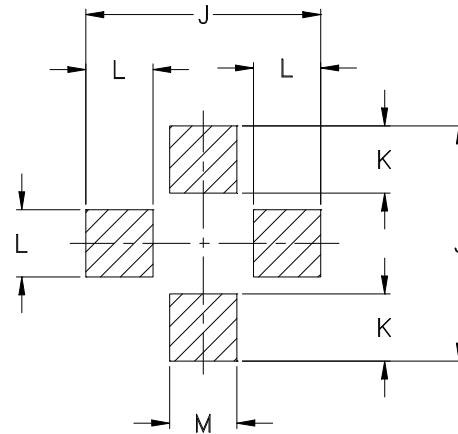

Suggested Layout,
Tolerance to be within $\pm .002$

| CASE # | A | B | C | D | E | F | G | H | J | K | L | M | N | WT. GRAM |
|--------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|---|----------------|----------------|----------------|----------------|----------------|----------|
| AF190 | .180 (4.57) | .090 (2.29) | .020 (0.51) | .100 (2.54) | .083 (2.11) | .072 (1.83) | .005 (0.13) | - | .210 (5.33) | .060 (1.52) | .060 (1.52) | .060 (1.52) | .020 (0.51) | .04 |

Dimensions are in inches (mm). Tolerances: 2Pl. $\pm .03$; 3Pl. $\pm .015$

Notes:

- Case material: Ceramic.
- Termination material:
Nickel-Iron alloy 42.
- Termination finish:
For RoHS Case Styles: Tin-Silver alloy plate over Nickel barrier.
For RoHS-5 Case Styles: Tin-Lead plate.
- Termination (1):
Identified by diagonally cut lead.
- Special Tolerances: Termination width $\pm .005$ inch, termination thickness $\pm .002$ inch, cap diameter $\pm .005$ inch.




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified


THIRD ANGLE PROJECTION



REVISIONS

| REV | ECN No. | DESCRIPTION | DATE | DR | AUTH |
|-----|---------|-----------------------------|----------|----|------|
| OR | M108436 | NEW RELEASE | 11/14/06 | PW | IG |
| A | M108585 | UPDATED DRAWING PER TB-414+ | 11/24/06 | PW | MM |
| | | | | | |

SUGGESTED MOUNTING CONFIGURATION FOR AF190 CASE STYLE, "cb" PIN CONNECTION

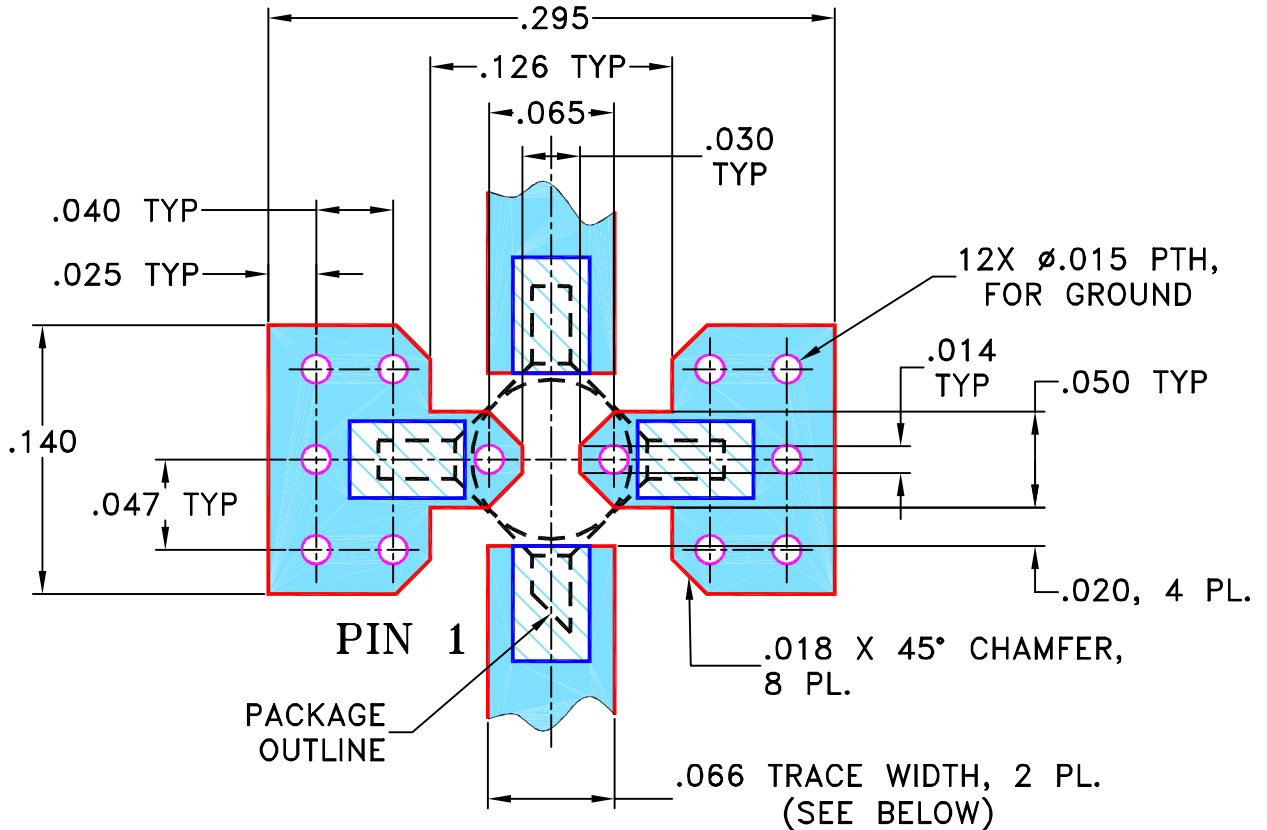

NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. IF PCB DESIGN RULES ALLOW, PLACE GROUND VIAS UNDER THE LAND PATTERN FOR BETTER RF PERFORMANCE. OTHERWISE PLACE GROUND VIAS AS CLOSE TO LAND PATTERN AS POSSIBLE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

| UNLESS OTHERWISE SPECIFIED | INITIALS | DATE |
|--|----------|-------------|
| DIMENSIONS ARE IN INCHES TOLERANCES ON: 2 PL DECIMALS ± 3 PL DECIMALS ± .005 ANGLES ± FRACTIONS ± | DRAWN | PW 11/11/06 |
| | CHECKED | IL 11/14/06 |
| | APPROVED | IG 11/14/06 |


Mini-Circuits® 13 Neptune Avenue
Brooklyn NY 11235

PL, cb, AF190, RAM, TB-414-X+


Mini-Circuits®
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

| | | | |
|------------------|---------------------|--------------------------|-----------|
| SIZE A | CODE IDENT 15542 | DRAWING NO: 98-PL-254 | REV: A |
| FILE: 98PL254 | SCALE: 10:1 | SHEET: 1 OF 1 | |

Evaluation Board and Circuit

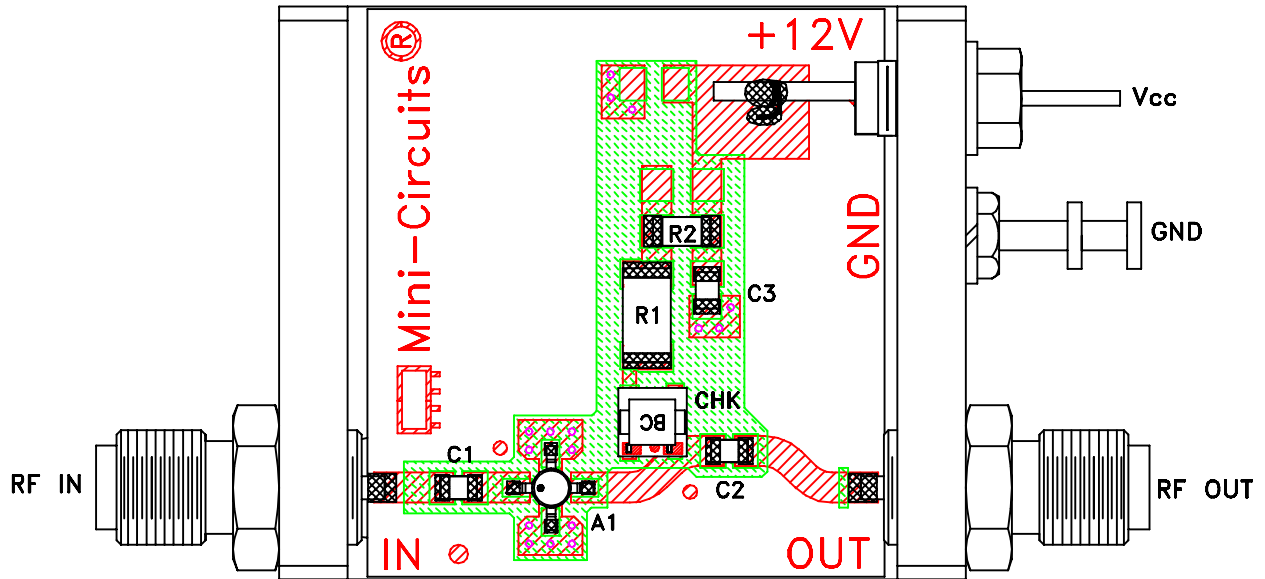

TB-414-2+

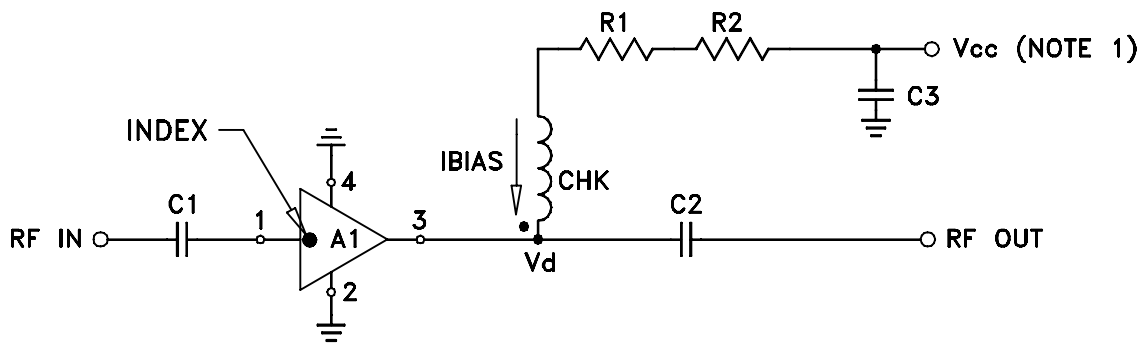


| COMPONENT | VALUE |
|-------------|------------------------|
| A1 | RAM-2(+) |
| C1 (NOTE 4) | 2400 pF |
| C2 (NOTE 4) | 2400 pF |
| C3 (bypass) | 0.1 uF |
| R1 | 280 Ohms, 0.75W |
| R2 | 0 Ohm, 0.25W |
| CHK | Mini-Circuits TCCH-80+ |

Schematic Diagram

NOTE:

1. Vcc voltage: $+12 \pm 0.2V$.
2. SMA Female connectors.
3. PCB material: Rogers R04350 or equivalent, dielectric constant=3.5, dielectric thickness=.030 inch.
4. Capacitors, C1 & C2 should be free of resonance up to the highest frequency specified.

 **Mini-Circuits®**

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference/Spec |
|--------------------------------|---|--|
| Operating Temperature | -54° to 100°C Ambient Environment | Individual Model Data Sheet |
| Storage Temperature | -65° to 150° C Ambient Environment | Individual Model Data Sheet |
| HTOL | 1000 hours at 125°C | MIL-STD-883, Method 1005, Condition B |
| Thermal Shock | -55° to 105°C, 100 cycles | MIL-STD-202, Method 107, Condition A-3, except +100°C |
| Mechanical Shock | 1500g, 0.5 ms, 5 shock pulses, Y1 direction only | MIL-STD-883, Method 2002, Condition B, except Y1 direction only. |
| Vibration (Variable Frequency) | 50g peak 20-2000 Hz, 4 times in each of three perpendicular directions (total 12) | MIL-STD-883, Method 2007, Condition B |
| Autoclave | 15 psig, 100% RH, 121°C, 96 hours | JEDEC-STD-22-B, Method A102 |
| Solderability | 10X Magnification | J-STD-002, Para 4.2.5, Test S, 95% Coverage |
| Solder Reflow Heat | Sn-Pb Eutetic Process: 240°C peak Pb-Free Process: 260°C peak | J-STD-020, Table 4-1, 4-2 and 5-2; Figure 5-1 |
| Moisture Sensitivity: Level 1 | Bake at 125°C for 24 hours. Soak at 85°C/85%RH for 168 hours Reflow 3 cycles at 260°C peak | J-STD-020 |
| Marking Resistance to Solvents | Isopropyl alcohol + mineral spirits at 25°C; terpene defluxer at 25°C; | MIL-STD-202, Method 215 |

All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification**Test/Inspection Condition****Reference/Spec**

distilled water + proylene glycol monomethyl ether +
monoethanolamine at 63°C to 70°C