
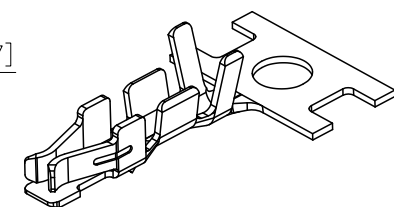
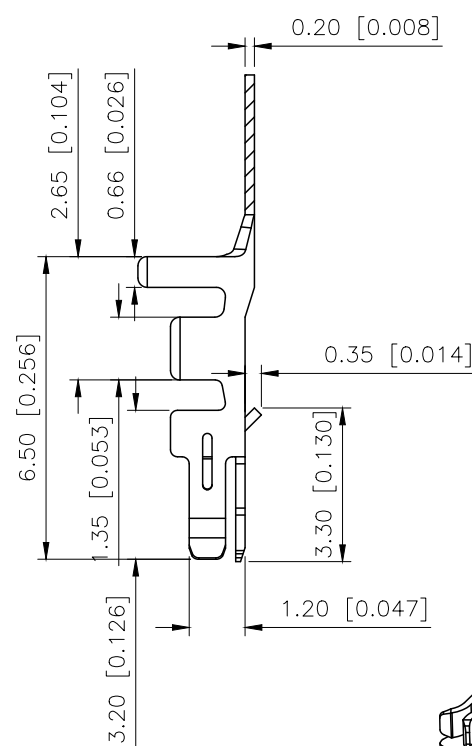


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.25	阿树

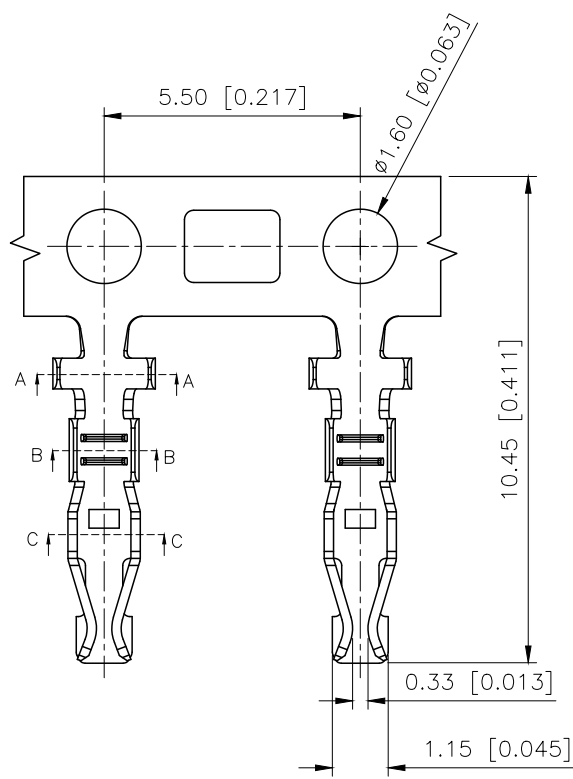


- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ


PART NO.:

X2026 T-P XXX X-L
① ② ③ ④ ⑤ ⑥


- ①Series Number.
②Category: T-terminal
③Material:P-Phosphor bronze
④Plating style:SN-Bright tin plating;
V01-Gold Flash
G03-Gold 3u"Plated Contact
⑤Plating method:Blank-Stamping before plating
B-plating before stamping
⑥Mold NO./Mark/Special NO:L-Loose



SECTION:A-A
SCALE:1:1



SECTION:B-B
SCALE:1:1



SECTION:C-C
SCALE:1:1

X2026T-PG03-L	Phosphor Bronze	AWG#22-28	1.50mm(Max)	Stamping Before Pating:30u"MIN Ni;Contact Area Gold:3u"MIN	X2026H.2026H-L
X2026T-PV01-L				Stamping Before Pating:30u"MIN.Ni;Whole Gold Flash	
X2026T-PSNB-L				Plating Before Stamping:10u"Ni;40~60 u"S	
X2026T-PSN-L				Stamping Before Plating:30u"MIN Ni;70u"MIN Sn	
PART NO	Material	Wire Range	Insulation OD		Suitable XKTB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.00mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.: X2026T-PXXXX-L
APPROVED		SIZE:	A4	DWG NO.: