
1717445-5 - ACTIVE

TE Internal #: 1717445-5 Board-to-Board, 8 Position, 2.5 mm [.098 in] Centerline, Plug, 30 VDC, Right Angle, Printed Circuit Board, Power & Signal, DC Jack Connectors

View on TE.com >

Connectors > PCB Connectors > Battery Connectors & Holders > DC Jack Connectors

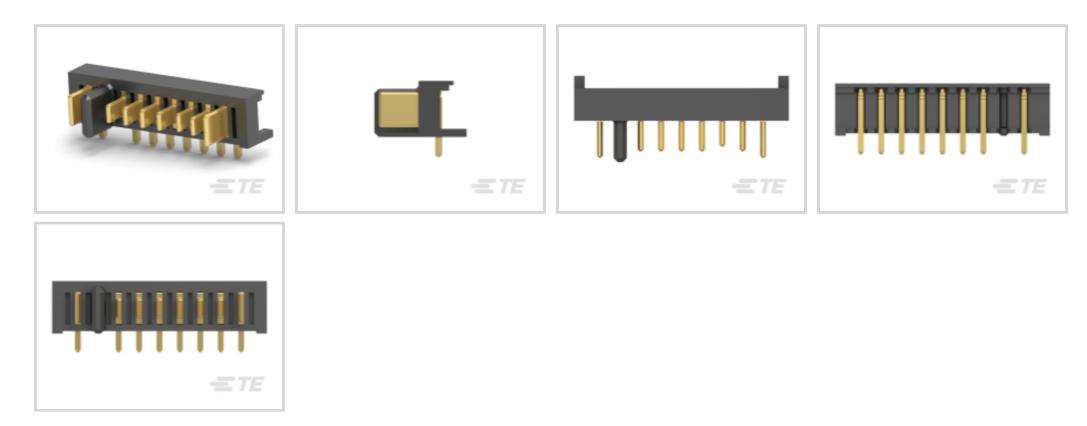

Connector System: Board-to-Board

Number of Positions: 8

Centerline (Pitch): 2.5 mm [.098 in]

Connector & Housing Type: Plug

Operating Voltage: 30 VDC

Features

Product Type Features



Connector System	Board-to-Board				
Connector & Housing Type	Plug				
Connector & Contact Terminates To	Printed Circuit Board				
Configuration Features					
Number of Positions	8				
PCB Mount Orientation	Right Angle				
Electrical Characteristics					
Operating Voltage	30 VDC				
Contact Features					
Contact Current Rating (Max)	6 A				
Mechanical Attachment					
PCB Mount Retention	Without				
Connector Mounting Type	Board Mount				
Housing Features					

1717445-5

Board-to-Board, 8 Position, 2.5 mm [.098 in] Centerline, Plug, 30 VDC, Right Angle, Printed Circuit Board, Power & Signal, DC Jack Connectors



Centerline (Pitch)	2.5 mm[.098 in]
Usage Conditions	
Operating Temperature Range	-20 – 80 °C[-4 – 176 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Method	Box & Tray
EU RoHS Directive 2011/65/EU	
EU ELV Directive 2000/53/EC	Compliant
	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016 EU REACH Regulation (EC) No. 1907/2006	

0

ppm.

Solder Process Capability

Reflow solder capable to 260°C

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

1717445-5

Board-to-Board, 8 Position, 2.5 mm [.098 in] Centerline, Plug, 30 VDC, Right Angle, Printed Circuit Board, Power & Signal, DC Jack Connectors



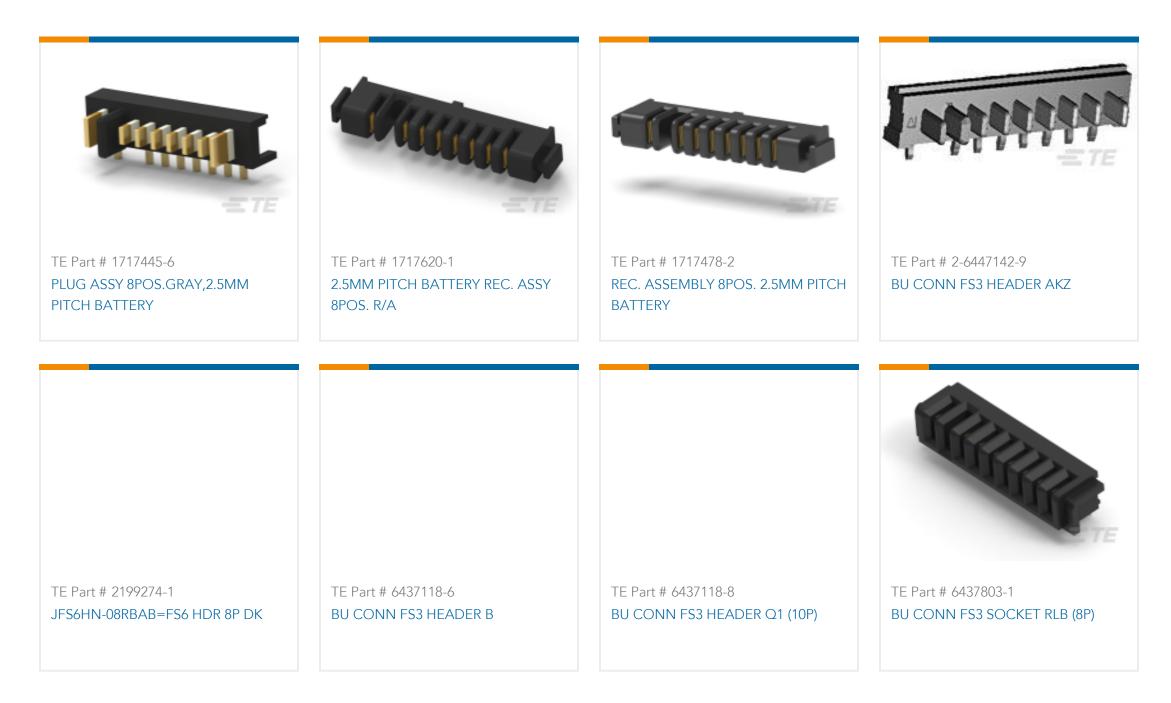

Customers Also Bought



FSM4JSMATR=TACT SWITCH 6X6MIL	DUST COVER, SFP, GANGED & STACKED	REC. ASSEMBLY 8POS. 2.5MM PITCH BATTERY	ASSY, RECEPTACLE, EUROCARD, TYPE
	RS 222		ALLUN ETE
TE Part #84953-7 1MM FPC HORZ.TOP CONT.ASSY 7P	TE Part #1623251-1 CRG0805 1% 560K	TE Part #41617 250 FASTON TAB BR	TE Part #1-2132230-0 EP2.5 Shrouded HDR ASSY 10P VE



Documents

1717445-5

Board-to-Board, 8 Position, 2.5 mm [.098 in] Centerline, Plug, 30 VDC, Right Angle, Printed Circuit Board, Power & Signal, DC Jack Connectors



Product Drawings PLUG ASSY 8POS.GRAY,2.5MM PITCH BATTERY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1717445-5_D_c-1717445-5-d.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1717445-5_D_c-1717445-5-d.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1717445-5_D_c-1717445-5-d.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Crimping of AMP El Series Connector Contacts

Japanese

Application Specification

Japanese