### **PIDG**

TE Internal #: 2-320631-1

Closed Ring Tongue Terminal, 16 – 14 AWG, #6 / M3.5 Stud Size,


3.51 mm [.138 in] Stud Diameter, Closed Barrel, Straight, Tin,

Partially Insulated

View on TE.com >



Terminals & Splices > Ring Terminals > PIDG Ring Tongue Terminals

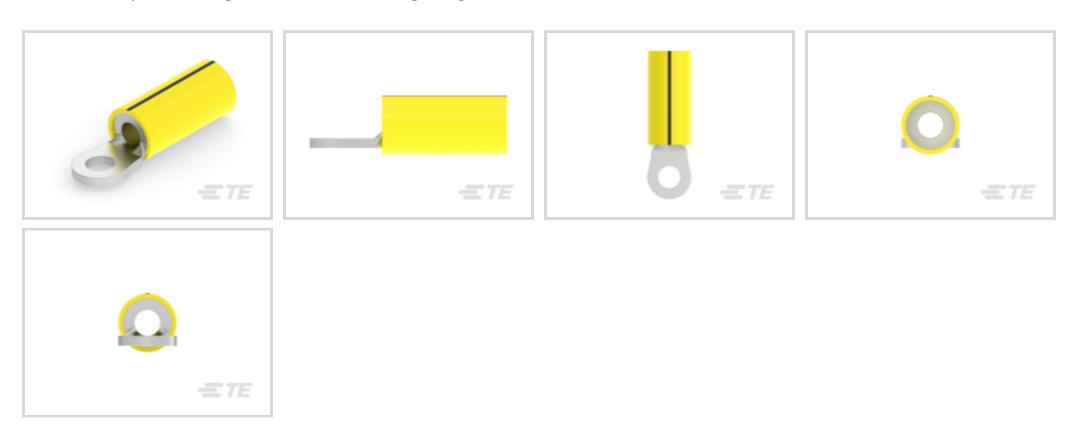

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 2050 – 5180 CMA

Stud Size: **#6, M3.5** 

All PIDG Ring Tongue Terminals (411)

## **Features**

## **Product Type Features**

Terminal Features	Heavy Duty
Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	#6, M3.5
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	1
Electrical Characteristics	
Voltage Rating	300 V
Body Features	
Insulation Sleeve Color	Yellow
Stripe Color	Black

4.32 g

Product Weight



Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	2050 – 5180 CMA
Stud Diameter	3.51 mm[.138 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	24.21 mm[.953 in]
Compatible Insulation Diameter (Max)	5.84 mm[.23 in]
Compatible Insulation Diameter Range	3.81 – 5.84 mm[.15 – .23 in]
Usage Conditions	
	Partially Insulated
Usage Conditions	Partially Insulated 105 °C[221 °F]
Usage Conditions Insulation Option	
Usage Conditions  Insulation Option  Operating Temperature Range	
Usage Conditions  Insulation Option  Operating Temperature Range  Operation/Application	105 °C[221 °F]
Usage Conditions  Insulation Option  Operating Temperature Range  Operation/Application  Compatible With Wire Base Material	105 °C[221 °F]  Copper
Usage Conditions  Insulation Option  Operating Temperature Range  Operation/Application  Compatible With Wire Base Material  Compatible With Wire Plating Material	105 °C[221 °F]  Copper
Usage Conditions  Insulation Option  Operating Temperature Range  Operation/Application  Compatible With Wire Base Material  Compatible With Wire Plating Material  Industry Standards	105 °C[221 °F]  Copper  Tin
Usage Conditions  Insulation Option  Operating Temperature Range  Operation/Application  Compatible With Wire Base Material  Compatible With Wire Plating Material  Industry Standards  Government Qualified Terminal	105 °C[221 °F]  Copper  Tin

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241)



Does not contain R	REACH SVHO	
--------------------	------------	--

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC
	Free

#### Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

## Compatible Parts





10 ASSY











Also in the Series | PIDG





Compression Connectors(17)



Crimp Wire Pins, Tabs & Ferrules(41)



Hand Crimping Tools(2)



Knife Disconnects(11)




Quick Disconnects(32)



Ring Terminals(589)



Spade Terminals(228)

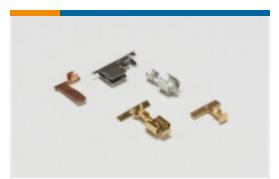

Special Purpose Terminals(1)



Splices(39)

# Customers Also Bought



TE Part #328999 TERMINAL,PIDG R 16-14 3/8



TE Part #2-320861-1
TERMINAL,PIDG SPD FLG 16-14 6



TE Part #1-1658621-2 64 NOVO MIL/CTR 15DP,LEAD FREE



**PANEL** 

SE TE

TE Part #176498-6 PL MKII 187 REC HSG 2P NYLON BLUE



TE Part #176292-2
UNIV POWER CAP HSG 2P P/MOUNT



TE Part #2294562-1 UMNL TWIST-N-LOK, 5POS, CAP HOUSING



10/27/2024 04:02PM | Page 4





## **Documents**

## **Product Drawings**

TERMINAL, PIDG RING 16-14 HD 6

English

### **CAD Files**

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2-320631-1\_M.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-320631-1\_M.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-320631-1\_M.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Agency Approvals

**UL Report** 

English