

ITEM	MOLEX P/N	DESCRIPTION	QTY	UOM
A	39014061	MiniFit Jr SR Recpt Hsg 6 CKT V-0	1	PC
B	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	6	PC
C	--	RESIN BLEND STPRNE	A/R	KG
D	--	MOLD PART INNER CAP	2	PC
E	--	RESIN PP RTP 151 A NAT UL94V-0 HF	A/R	KG

FROM	TO	CABLE DESCRIPTION	COLOR
A1	--	6CX16AWG UNSHD BK UL2464	BLACK
A2	--		RED
A3	--		WHITE
A4	--		GREEN
A5	--		BLUE
A6	--		YELLOW

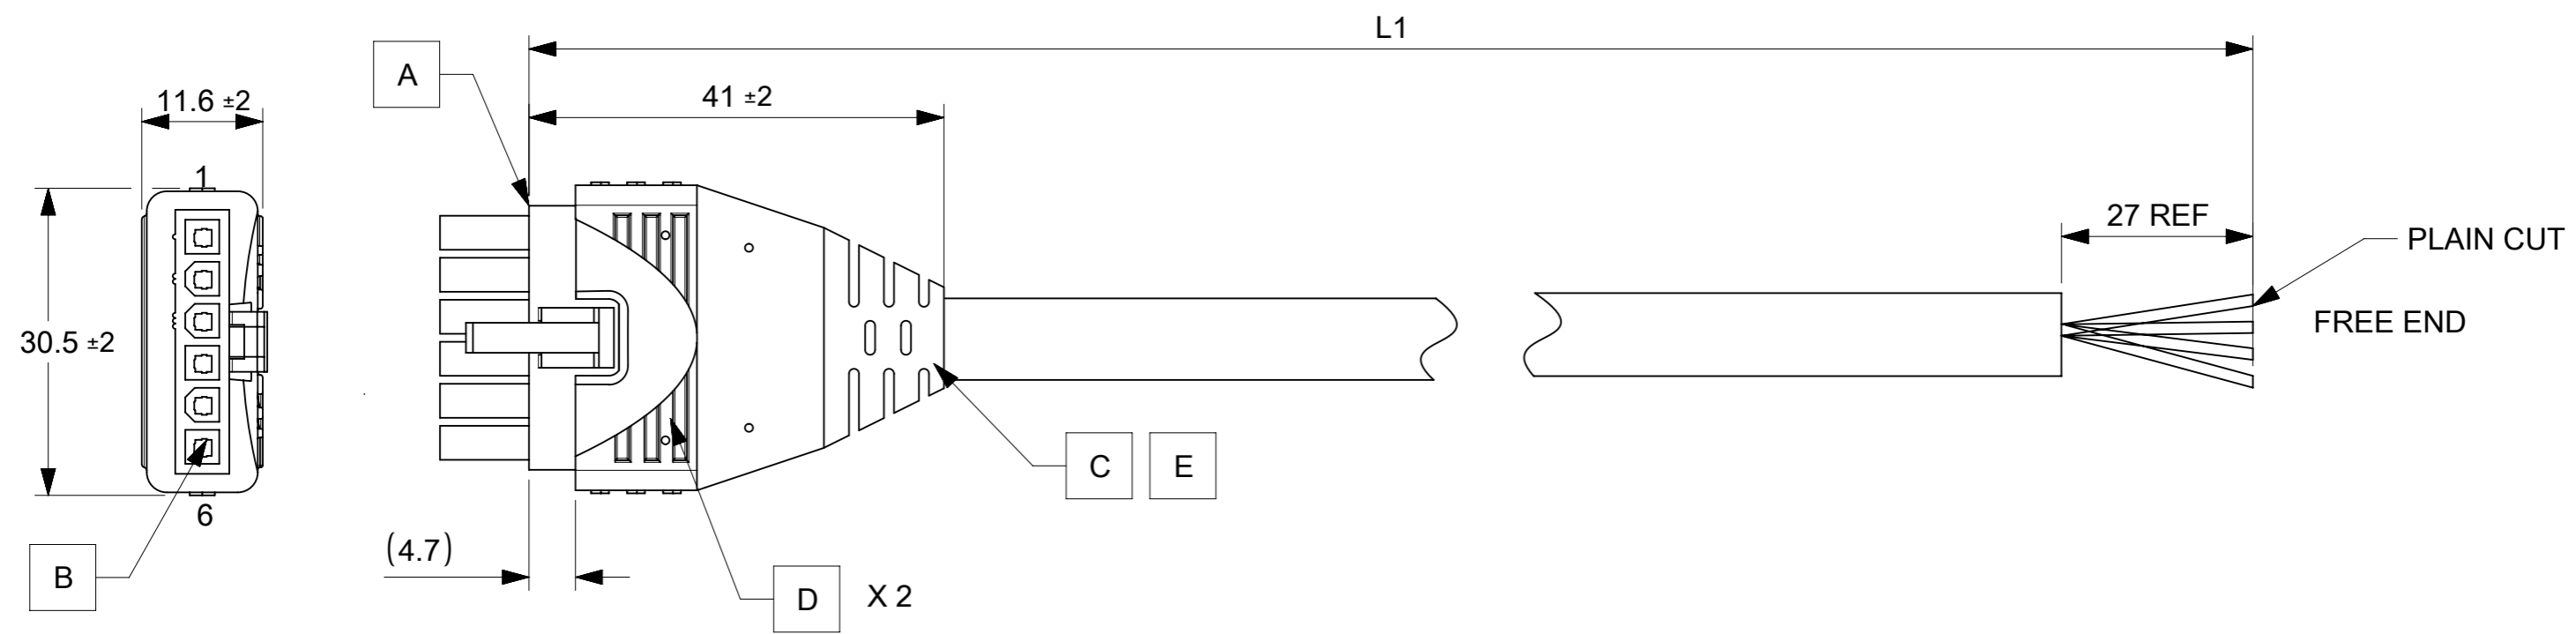


TABLE		
PART NUMBER	TITLE	L1
2171590605	6 CKT OVERMOLD MINIFIT JR PIGTAIL 500MM	500±10
2171590610	6 CKT OVERMOLD MINIFIT JR PIGTAIL 1M	1000±20
2171590620	6 CKT OVERMOLD MINIFIT JR PIGTAIL 2M	2000±25
2171590630	6 CKT OVERMOLD MINIFIT JR PIGTAIL 3M	3000±30

NOTES:

- MOLDING MATERIAL:
  - INNERCAP: PA66 NYLON RESIN.
  - OVERMOLD: SANTOPRENE TPE RESIN.
  - INNERMOLD: PP NAT UL94V-0
- ELECTRICAL PERFORMANCE:
  - VOLTAGE RATING: 300V AC.
  - THIS PRODUCT MUST PASS 100% CONTINUITY TEST PER MOLEX ES-36586-004.
    - DIELECTRONIC STRENGTH: 500V DC/0.01 SEC.
    - INSULATION RESISTANCE: 20M OHMS
- CONNECTOR VIEWS ARE SHOWN FROM MATING SIDE.
- MECHANICAL PERFORMANCE:
  - CABLE HARNESS SHOULD WITHSTAND AN AXIAL FORCE OF 5KGF FOR ONE MINUTE BETWEEN OVERMOLD AND CONNECTOR WITHOUT PHYSICAL DAMAGE.
  - OVERMOLD SIDE CAN PASS THE BENDING TEST IN 100 CYCLES AT EACH OF 2 PLANES, PER EIA364-41 CONDITION I.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC:		<b>molex</b>																						
	<table border="1"> <tr> <th>DIMENSION UNITS</th> <th>SCALE</th> </tr> <tr> <td>mm</td> <td>NTS</td> </tr> </table>	DIMENSION UNITS	SCALE		mm	NTS	<table border="1"> <tr> <td>EC NO: 740245</td> <td>2023/02/24</td> </tr> <tr> <td>DRWN: PRAVES6</td> <td>2023/03/29</td> </tr> <tr> <td>CHK'D: SKUMAR07</td> <td>2023/03/29</td> </tr> <tr> <td>APPR: SKUMAR07</td> <td>2023/03/29</td> </tr> </table>		EC NO: 740245	2023/02/24	DRWN: PRAVES6	2023/03/29	CHK'D: SKUMAR07	2023/03/29	APPR: SKUMAR07	2023/03/29	SEE TABLE									
DIMENSION UNITS	SCALE																									
mm	NTS																									
EC NO: 740245	2023/02/24																									
DRWN: PRAVES6	2023/03/29																									
CHK'D: SKUMAR07	2023/03/29																									
APPR: SKUMAR07	2023/03/29																									
DIVISIONAL SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	INITIAL REVISION:		PRODUCT CUSTOMER DRAWING																						
	<table border="1"> <tr> <th>ANGULAR TOL</th> <th>±</th> <th>*</th> </tr> <tr> <td>4 PLACES</td> <td>±</td> <td></td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td></td> </tr> <tr> <td>2 PLACES</td> <td>±</td> <td></td> </tr> <tr> <td>1 PLACE</td> <td>±</td> <td></td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td></td> </tr> </table>	ANGULAR TOL	±		*	4 PLACES	±		3 PLACES	±		2 PLACES	±		1 PLACE	±		0 PLACES	±		<table border="1"> <tr> <td>DRWN: SBS04</td> <td>2021/05/01</td> </tr> <tr> <td>APPR: MNARAYAN01</td> <td>2021/05/10</td> </tr> </table>		DRWN: SBS04	2021/05/01	APPR: MNARAYAN01	2021/05/10
ANGULAR TOL	±	*																								
4 PLACES	±																									
3 PLACES	±																									
2 PLACES	±																									
1 PLACE	±																									
0 PLACES	±																									
DRWN: SBS04	2021/05/01																									
APPR: MNARAYAN01	2021/05/10																									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING: A3-SIZE	SERIES: 217159	MATERIAL NUMBER: SEE TABLE	CUSTOMER: GENERAL MARKET	DOC TYPE: PSD	DOC PART: 000	REVISION: C	SHEET NUMBER: 1 OF 1																