


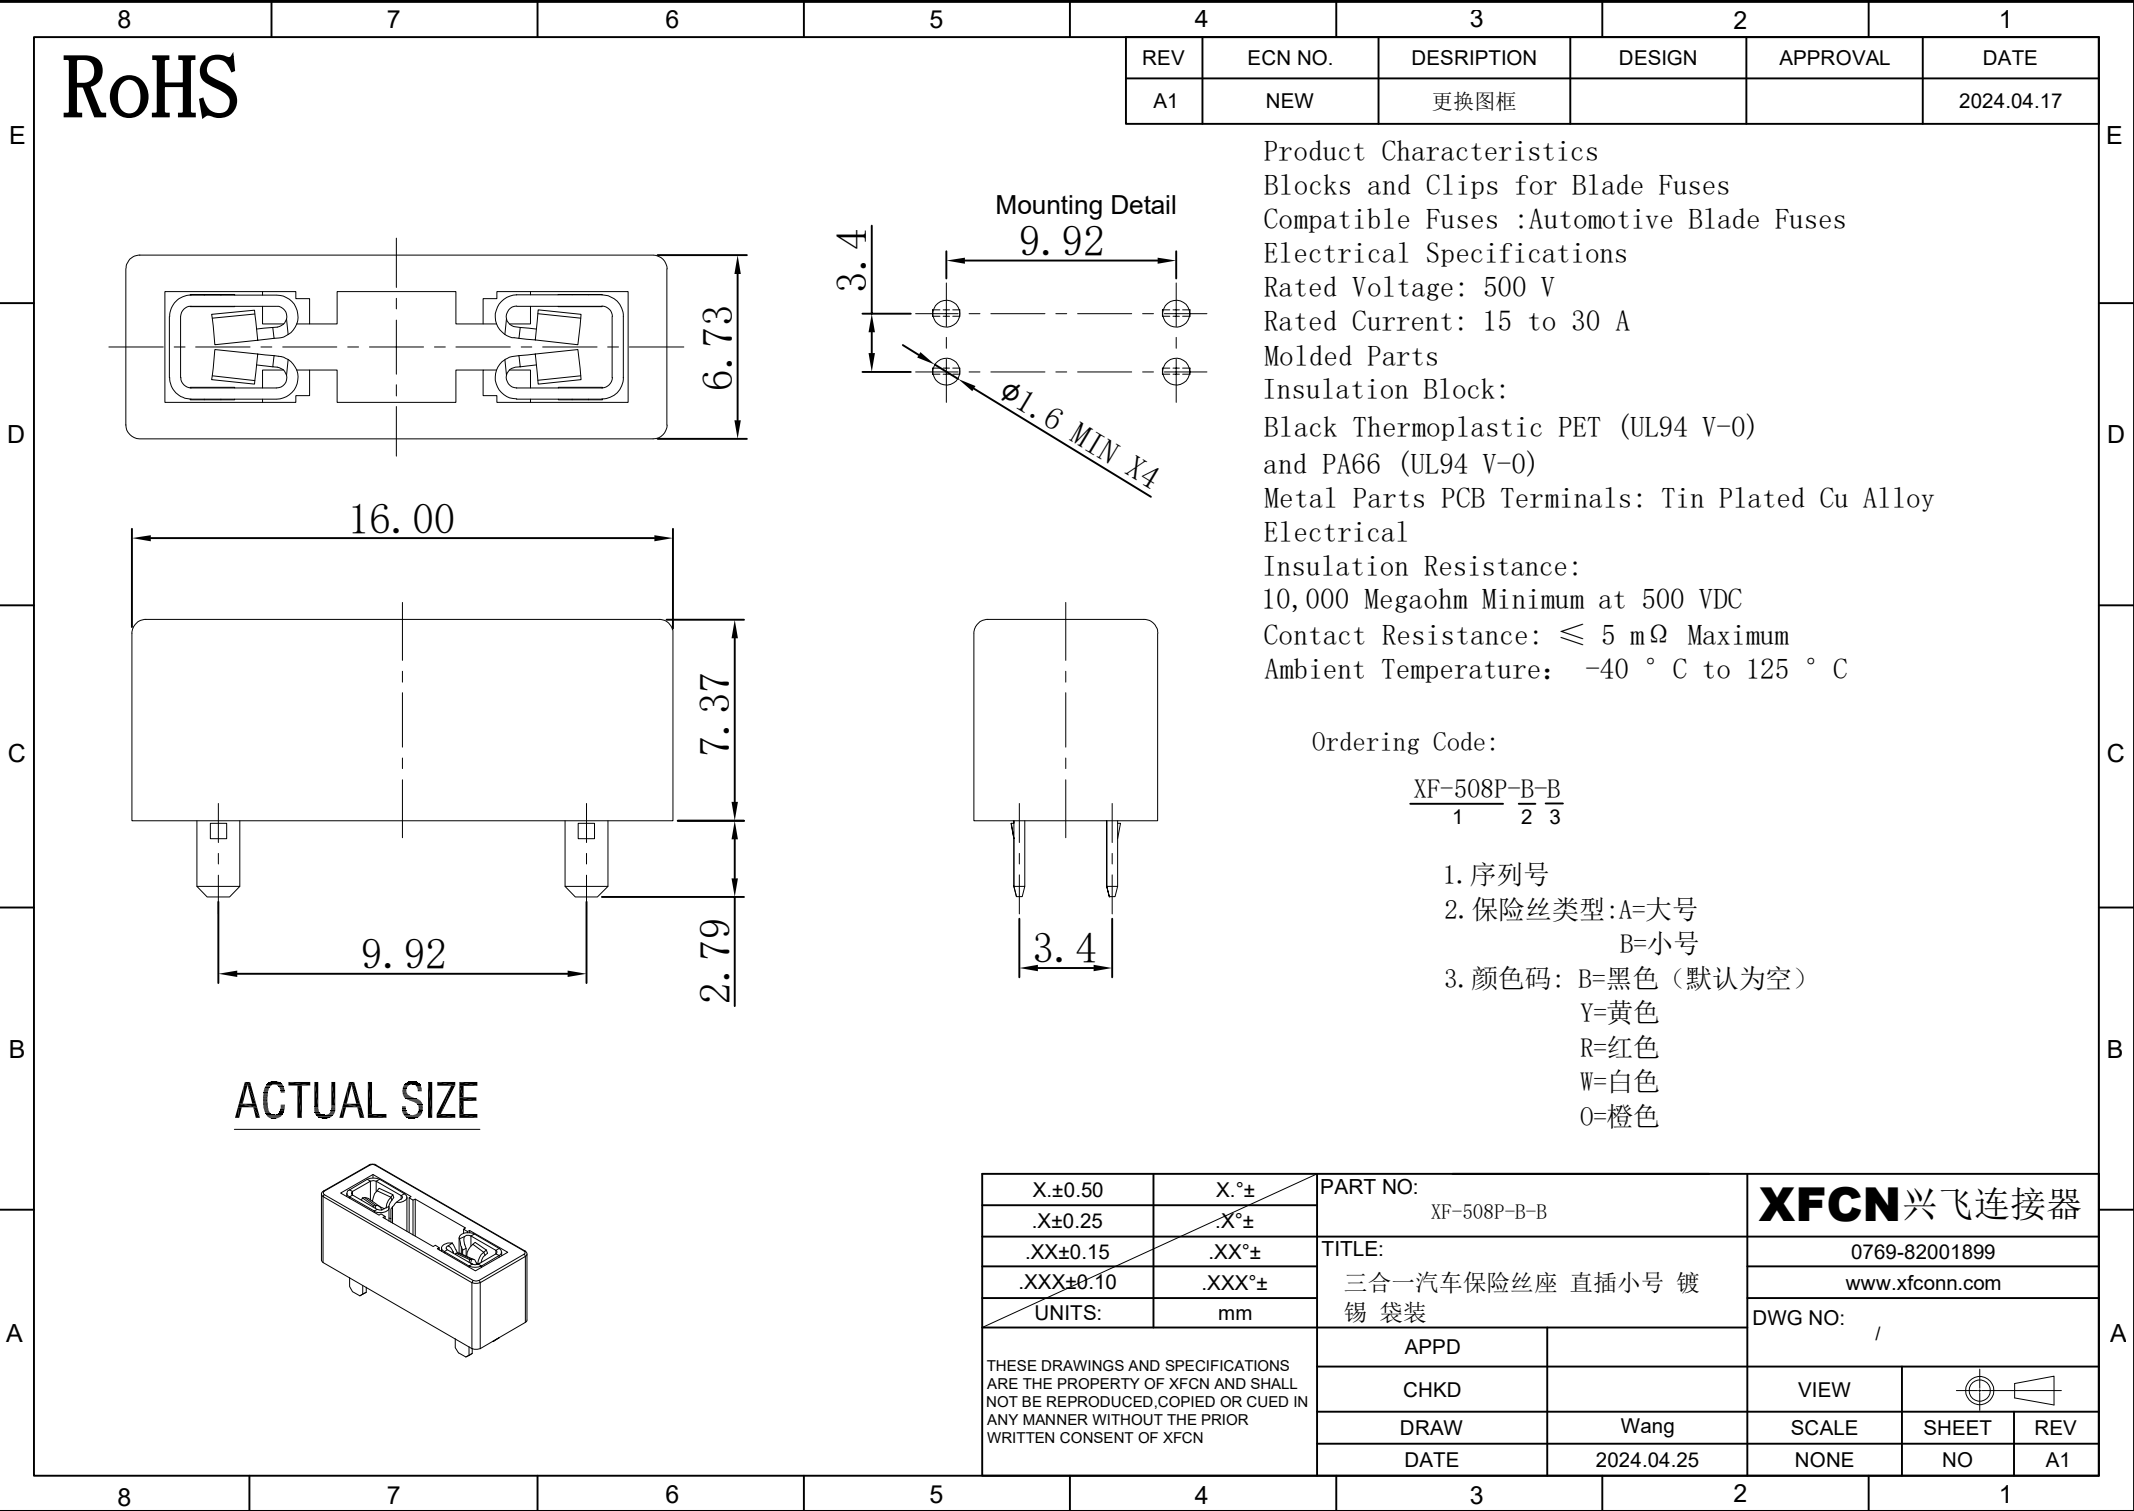

RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.04.17


Product Characteristics
Blocks and Clips for Blade Fuses
Compatible Fuses :Automotive Blade Fuses
Electrical Specifications
Rated Voltage: 500 V
Rated Current: 15 to 30 A
Molded Parts
Insulation Block:
Black Thermoplastic PET (UL94 V-0)
and PA66 (UL94 V-0)
Metal Parts PCB Terminals: Tin Plated Cu Alloy
Electrical
Insulation Resistance:
10,000 Megaohm Minimum at 500 VDC
Contact Resistance: ≤ 5 mΩ Maximum
Ambient Temperature: -40 ° C to 125 ° C

Ordering Code:

XF-508P-B-B
1 2 3

1. 序列号
2. 保险丝类型:A=大号
B=小号
3. 颜色码: B=黑色 (默认为空)
Y=黄色
R=红色
W=白色
O=橙色

ACTUAL SIZE



X.±0.50	X.°±	PART NO: XF-508P-B-B		XFCN 兴飞连接器		
.X±0.25	.X°±					
.XX±0.15	.XX°±	TITLE: 三合一汽车保险丝座 直插小号 镀锡 袋装		0769-82001899		
.XXX±0.10	.XXX°±			www.xfconn.com		
UNITS:	mm			DWG NO: /		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD		VIEW		
		CHKD		SCALE	SHEET	REV
		DRAW	Wang		NO	A1
		DATE	2024.04.25	NONE		