







REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.03.14	阿树

CODE TABLE( =ON)


TERMINAL	(20°)		(0°)		(20°)	
	(15°)				(15°)	
①						
②						
③						



CCW ← → CW

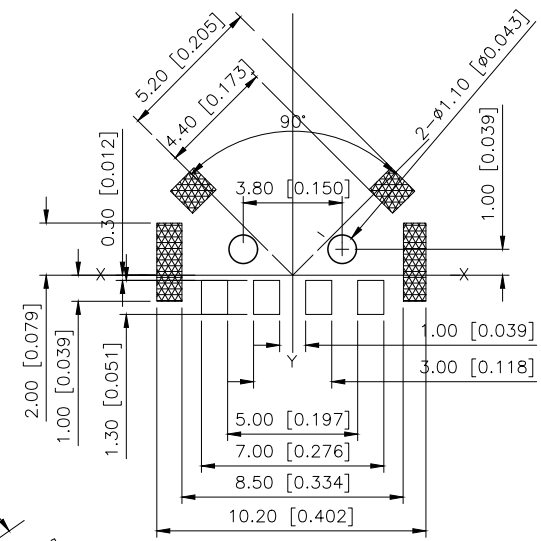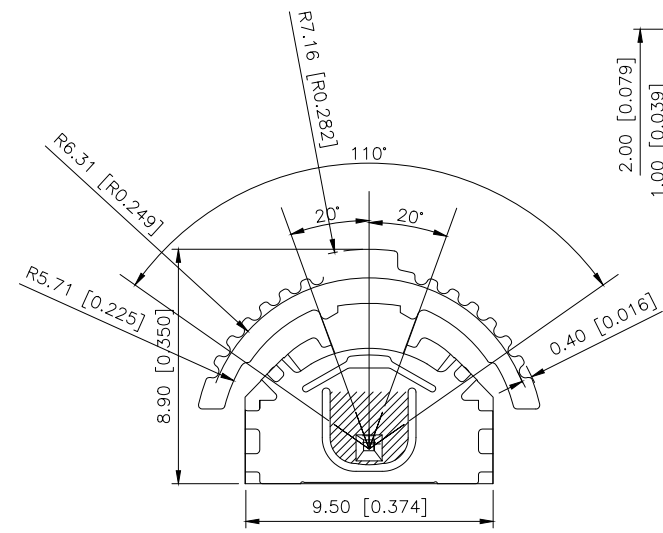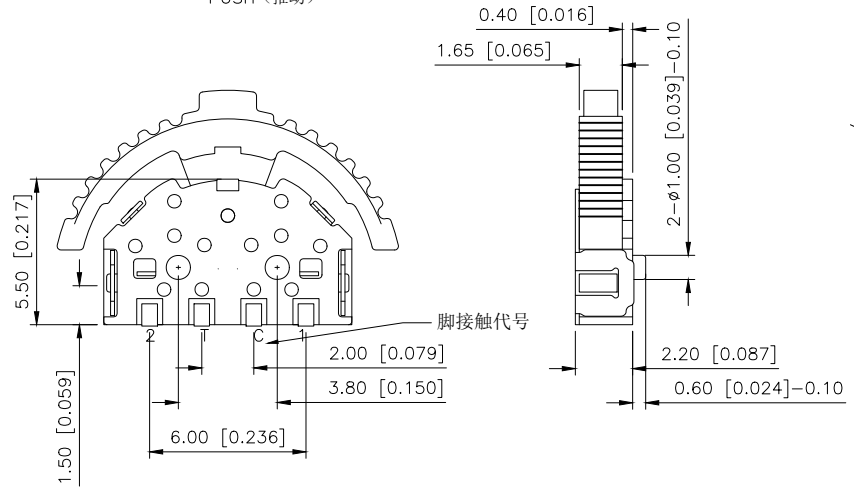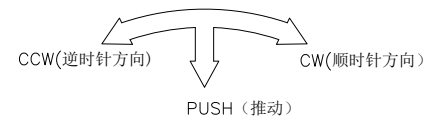

Project	Specification
Current rating:	0.1A DC12V
Insulation resistance:	≥100MΩ Min
Withstanding voltage:	≥AC100V(50/60Hz fcoy 1minute)
Mating cycles:	1000 cycles
Temperature range:	-10℃~+60℃
Operational intensity:	100±50gf
	250±100gf

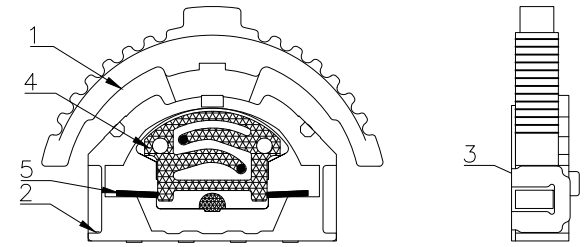

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW: 

UNIT: mm/in

SIZE: A4

MODEL TYPE:	MULTI-FUNCTIONAL SWITCH
PART NO.:	TM-2024A
DWG NO.:	