
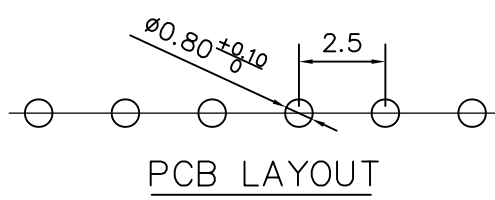
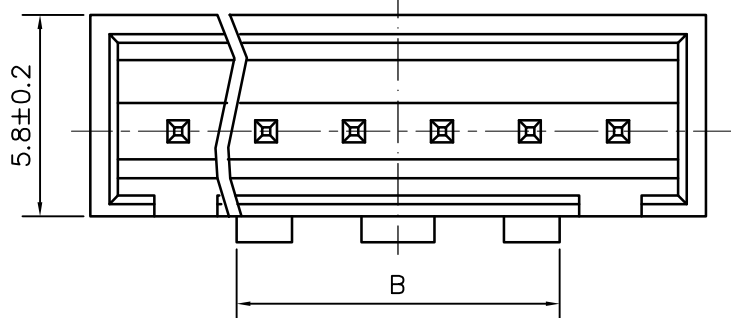
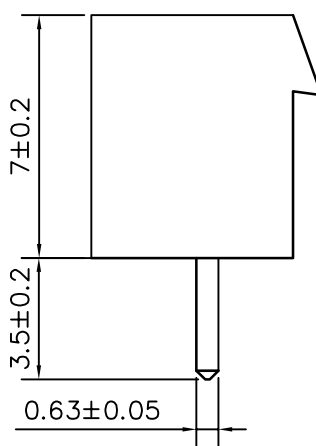
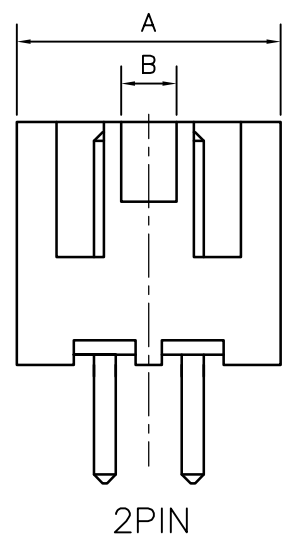


标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE	日期 DATE	核准 APPROVE

Pin	DIM A	DIM B
2	7.50	2.60
3	10.00	2.60
4	12.50	3.60
5	15.00	6.30
6	17.50	8.80
7	20.00	11.30
8	22.50	13.80
9	25.00	16.30
10	27.50	18.80
11	30.00	21.30
12	32.50	23.80
13	35.00	26.30
14	37.50	28.80
15	40.00	31.30
16	42.50	33.80

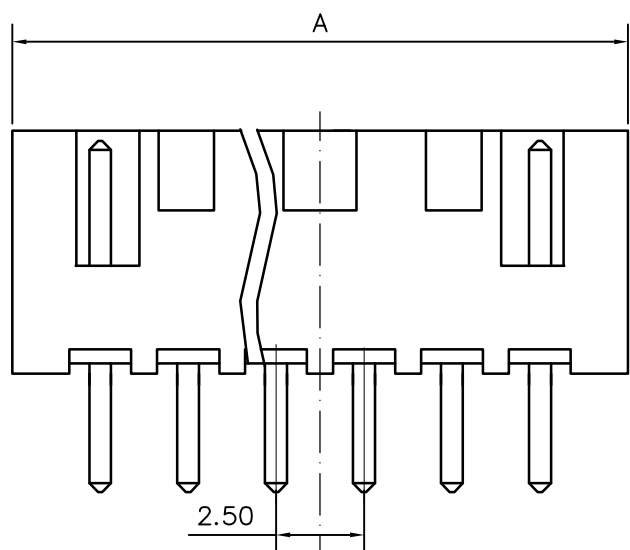

技术要求:
 适应基板厚度: 1.2mm~1.6mm
 温度范围: -25°C~85°C
 额定电压: 250V AC/DC
 额定电流: 3A
 接触电阻: ≤0.01Ω
 绝缘电阻: ≥1000MΩ
 耐 压: 1000V AC/minute

2	插针	铜	镀锡	
1	基座	PA66	白色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司 TITLE 品名 针座		HC-XHB-7A-TW PART NO 料号		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		比列 SCALE 1:1		
X.X ±0.35 X.XX ±0.25 X.XXX ±0.15	X' ±3.00' X.X' ±2.00' X.XX' ±1.00'	单位 UNIT MM	制图 DRAW AhYe		
		张数 PART NO 1 OF 1	审核 CHECKED 夏操云	批准 APPROVE 赵亮亮	
		版本 REV A			