

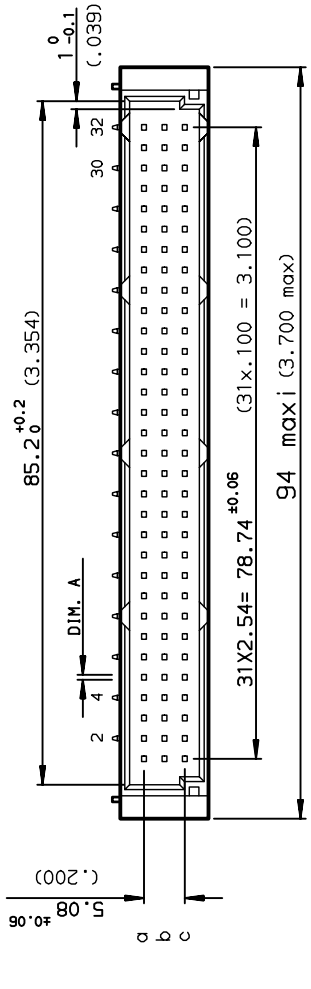


DIMENSIONS mm (inches)

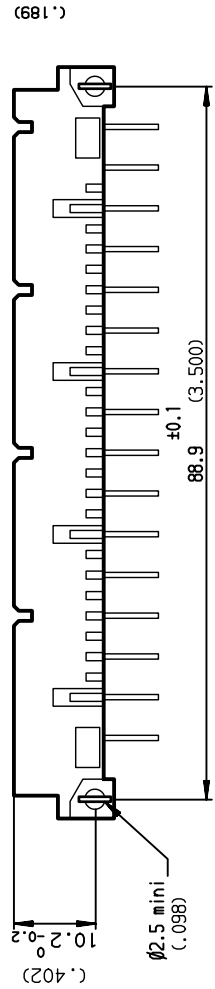

PCB DRILLING

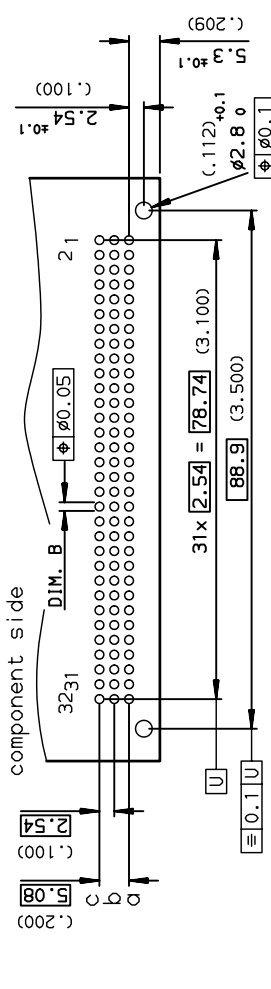

PART NUMBER	8609	71	8
PIN OUT			
ROWS a-b-c	3	48	
ROWS a-c	4	32	
NUMBER OF CONTACTS			
TERMINATION			
L = 2.75 ±0.15 (.108)	A = $\phi 0.6 \pm 0.08$	B = $\phi 0.8 \pm 0.3$	13
L = 4.15 ±0.15 (.163)	A = 0.6X0.6	B = $\phi 1 \pm 0.1$	23
OPTIONS			
no option			7
with harpoons			H
PERFORMANCE CLASS			
DIN 41612 class 3			4
DIN 41612 class 2			5
DIN 41612 class 1			6
TERMINATION TYPE			
TIN LEAD			000E1
LEAD FREE			E1LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED					Scale
Dr	ROUILLARD	1997/10/27	ANGULAR	0.X	±0.1	size	1.5
Eng	TARON	1997/10/27	LINEAR	0.XX	±0.1	ECN	L506-0095
Chr	LEGARE	1997/10/27	0.X' ±2'	0.XXX	±0.1	Product family	DIN 8609
Appr	LEGARE	1997/10/27				Spec ref	-
FCI		RIGHT ANGLE MALE - STYLE C		SOLDER TO BOARD		rev.	C
catalog no		C-8609-0631		CUSTOMER		sheet	1 of 1

rev	ech no	date
A	1997/10/27	
B	2005/03/02	
C	2006/07/21	

European Views

