


# High Density D-Sub PCB Right Angle Female

156-3215-E, 156-4215-E



High Density D-Sub PCB Right Angle Female

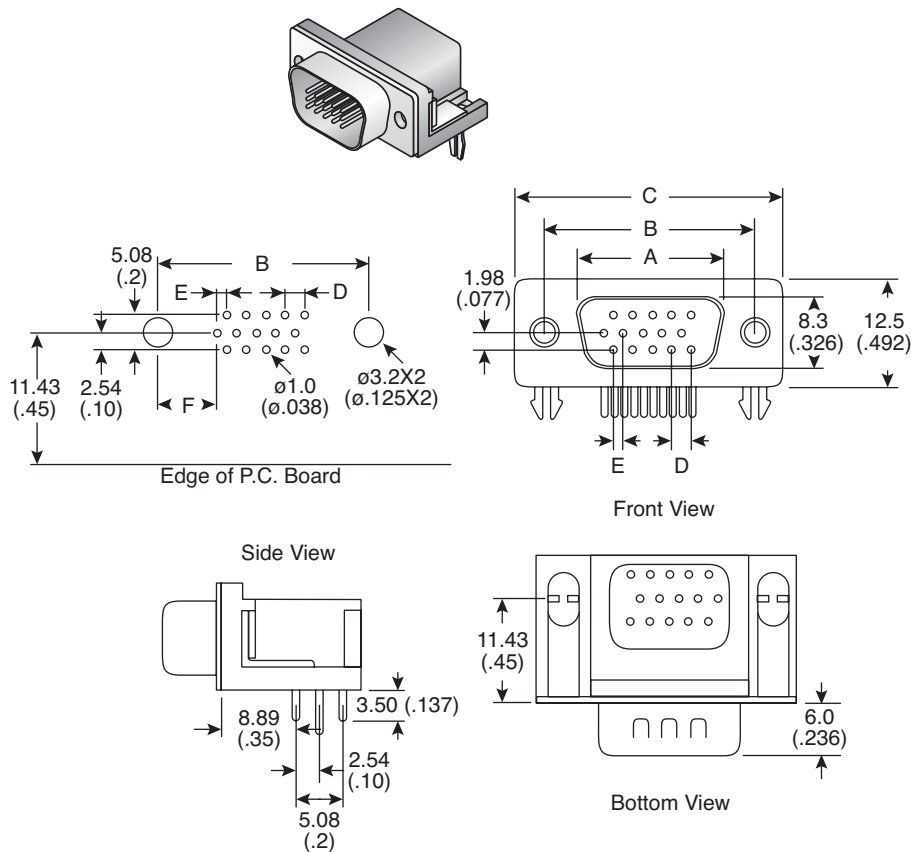

Dimensions: mm (in.)

Part No.	Size	A	B	C	D	E	F
156-3215-E	15mm	16.92	25.00	30.80	2.29	1.14	7.04
156-4215-E	26mm	25.25	33.30	39.20	2.29	1.14	6.88

## MECHANICAL SPECIFICATIONS

<b>Insulator</b>	Thermal Plastic
<b>Contacts</b>	Copper Alloy
<b>Shell</b>	Steel
<b>Rivet, Boardlock</b>	Copper Alloy
<b>Contact Plating</b>	Underplate: 50µ" Nickel
	Contact Area: 1µ"~30µ" Selective Gold
	Solder Tails Area:
	100µ" Tin/Lead(Brighten Lead) or
	100µ" Tin/Lead(Brighten Tin/Matte Tin)

## ELECTRICAL SPECIFICATIONS

<b>Operation Voltage</b>	250 VAC Max.
<b>Current Rating</b>	3 Amps Max
<b>Contact Resistance</b>	15 mΩ Min @ 500 VDC
<b>Dielectric Withstanding Voltage</b>	1000 VAC / Minute
<b>Operating Temperature</b>	-55°C to +105°C
<b>RoHS Compliant</b>	

Date Last Revised: 04-06-12

Available from Mouser Electronics  
1-800-346-6873 / www.mouser.com

KC- 301180

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

156-3215-E, 156-4215-E

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[156-3215](#) [156-4215-E](#) [156-3215-E](#)