
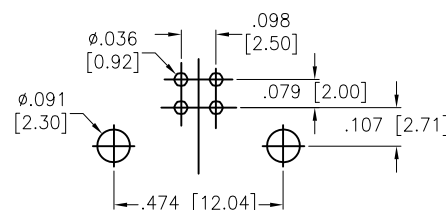


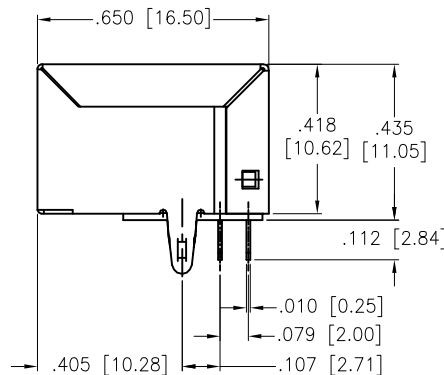



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/04	
A		REDRAWN	12/20/11	
B		UPDATED DRAWING	1/24/18	HR/DH

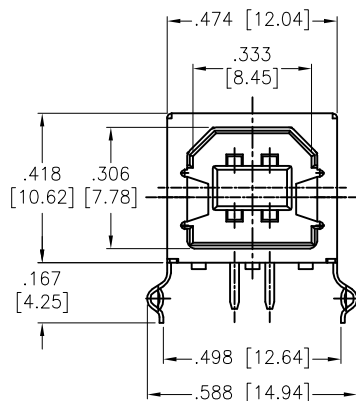

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: White

Contacts: Brass

Shell: Brass, Nickel plated

Plating:

Gold Flash over Nickel underplate on contact area

Electrical:

Voltage rating: 30 V

Current rating: 1.5 Amp @ 250 VAC

Contact resistance: 30 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

-20°C to +60°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS		DATE
DRAWN	SS	10/4/04
CHECKED		
APPROVED		

ADAME
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
UNIVERSAL SERIAL BUS, SINGLE PORT,
RIGHT ANGLE, WHITE INSULATOR

SIZE X	PART NO. USB-B-S-RA-WT	REV. B
REF: S00005C	SCALE: NTS	SHEET 1 OF 1