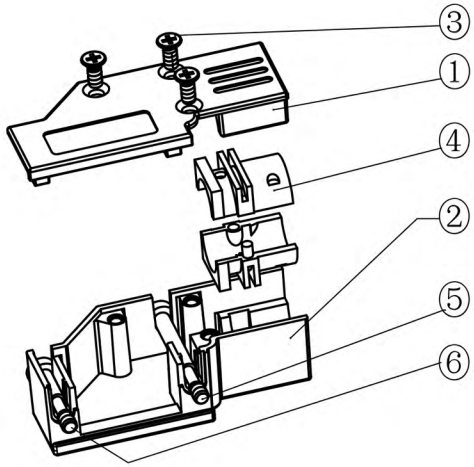


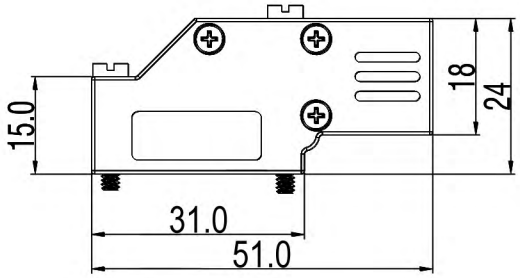





TECHNICAL SPECIFICATIONS

Material: Zinc
Plating: Nickel
Operating Temperature: -25°C to +90°C
Thumbscrews: UNC 4-40

No. of contacts: 09-15-25-37

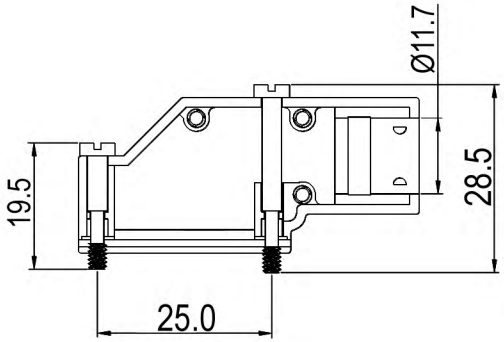


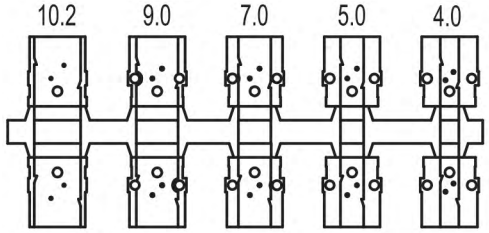


Grommet Set

| Item | QTY | Part description |
|---|---|---|
| 1 | 1 | Upper Cover |
| 2 | 1 | Lower Cover |
| 3 | 3 | CSK M2.5x11.5 Screw |
| 4 | 1 | Grommet Set |
| 5 | 1 | Jackscrew UNC4-40x28.5 |
| 6 | 1 | Jackscrew UNC4-40x19.5 |

**RoHS compliant**
**Unit: mm**

| Scale | Free |
|---|---|
| TOLERANCE | |
| 0~6 | ±0.10 |
| 6~30 | ±0.20 |
| 30~120 | ±0.30 |
| 120~400 | ±0.50 |
| DIM | Tol |
| Angle | ±1° |
| Angle | Tol |

| Id. | Modification | Date | Name |
|---|---|---|---|
| 0 | Drawn | 17.08.2017 | S.Bölling |

| | Date | Name |
|---|---|---|
| Drawn | 17.08.2017 | S.Bölling |
| Approved | 17.08.2017 | S.Bölling |

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
ACOV-SUB-09MB39

Drawing-No.
ASS_5280_CO

rev00

Replace

Sheet 1/4

SV4382

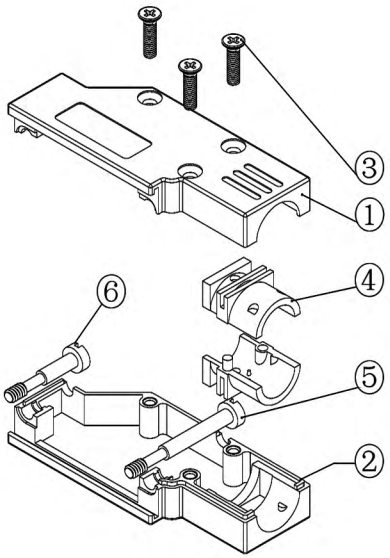


| Item | QTY | Part description |
|---|---|---|
| 1 | 1 | Upper Cover |
| 2 | 1 | Lower Cover |
| 3 | 3 | CSK M2.5x11.5 Screw |
| 4 | 1 | Grommet Set |
| 5 | 1 | Jackscrew UNC4-40x28.5 |
| 6 | 1 | Jackscrew UNC4-40x19.5 |

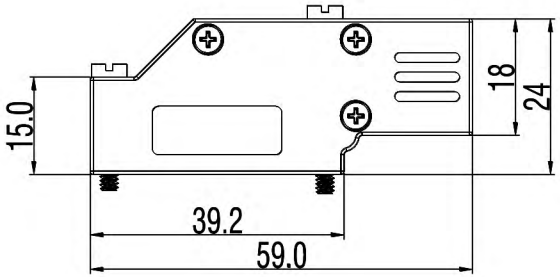





TECHNICAL SPECIFICATIONS

Material: Zinc
Plating: Nickel
Operating Temperature: -25°C to +90°C
Thumbscrews: UNC 4-40

No. of contacts: 09-15-25-37

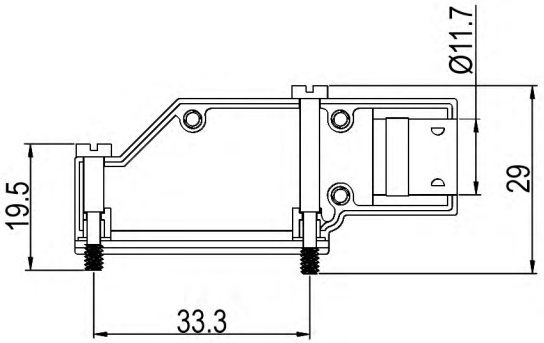


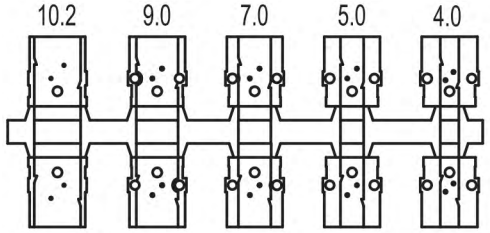


Grommet Set

**RoHS compliant**
**Unit: mm**

| Scale | Free |
|---|---|
| TOLERANCE | |
| 0~6 | ±0.10 |
| 6~30 | ±0.20 |
| 30~120 | ±0.30 |
| 120~400 | ±0.50 |
| DIM | Tol |
| Angle | ±1° |
| Angle | Tol |

| Id. | Modification | Date | Name |
|---|---|---|---|
| 0 | Drawn | 17.08.2017 | S.Bölling |

| | Date | Name |
|---|---|---|
| Drawn | 17.08.2017 | S.Bölling |
| Approved | 17.08.2017 | S.Bölling |

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
ACOV-SUB-15MB39

Drawing-No.
ASS_5280_CO

rev00

Replace

Sheet 2/4

SV4382

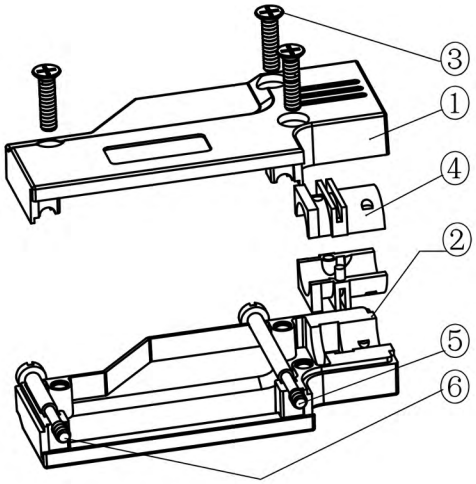


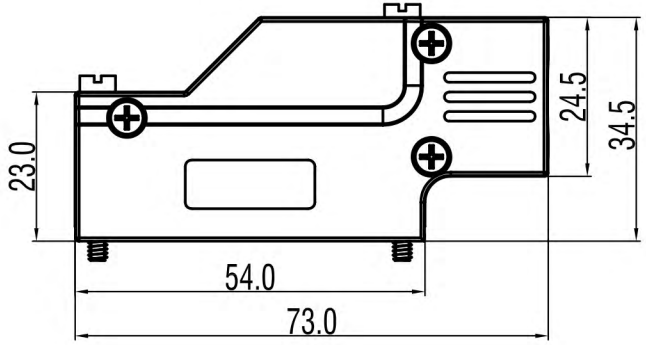





TECHNICAL SPECIFICATIONS

Material: Zinc
Plating: Nickel
Operating Temperature: -25°C to +90°C
Thumbscrews: UNC 4-40

No. of contacts: 09-15-25-37

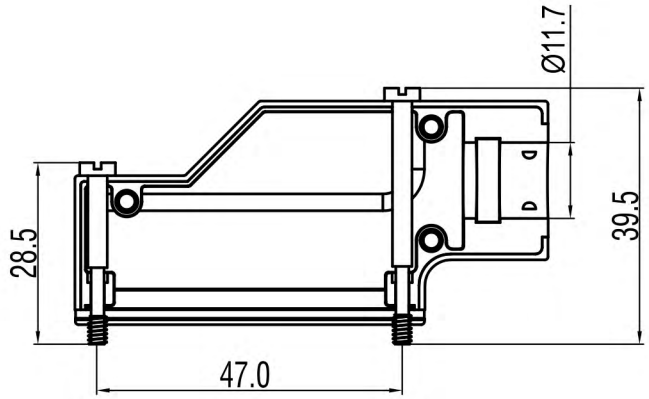


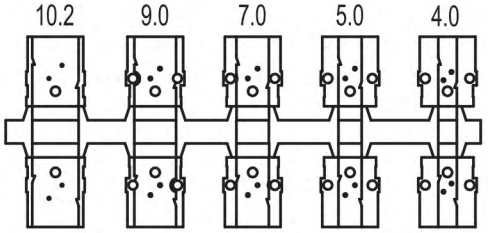


Grommet Set

| Item | QTY | Part description |
|---|---|---|
| 1 | 1 | Upper Cover |
| 2 | 1 | Lower Cover |
| 3 | 3 | CSK M3x12 Screw |
| 4 | 1 | Grommet Set |
| 5 | 1 | Jackscrew UNC4-40x39.5 |
| 6 | 1 | Jackscrew UNC4-40x28.5 |

**RoHS compliant**
**Unit: mm**

| Scale | Free |
|---|---|
| TOLERANCE | |
| 0~6 | ±0.10 |
| 6~30 | ±0.20 |
| 30~120 | ±0.30 |
| 120~400 | ±0.50 |
| DIM | Tol |
| Angle | ±1° |
| Angle | Tol |

| Id. | Modification | Date | Name |
|---|---|---|---|
| 0 | Drawn | 17.08.2017 | S.Bölling |

| | Date | Name |
|---|---|---|
| Drawn | 17.08.2017 | S.Bölling |
| Approved | 17.08.2017 | S.Bölling |

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
ACOV-SUB-25MB39

Drawing-No.
ASS_5280_CO

rev00

Replace

Sheet 3/4

SV4382

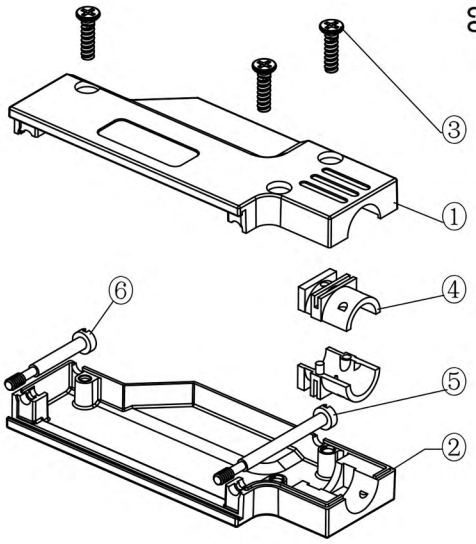


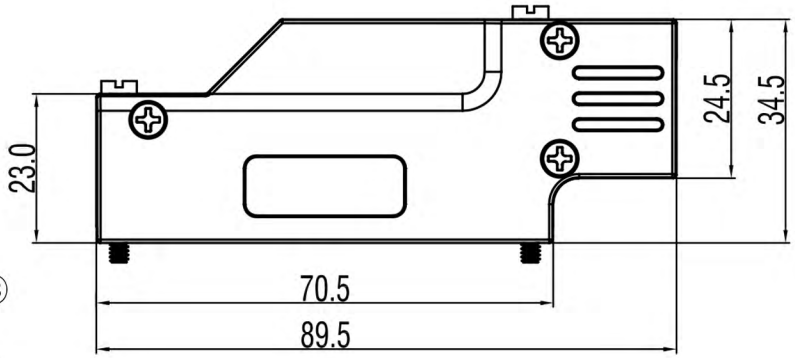





TECHNICAL SPECIFICATIONS

Material: Zinc
Plating: Nickel
Operating Temperature: -25°C to +90°C
Thumbscrews: UNC 4-40

No. of contacts: 09-15-25-37

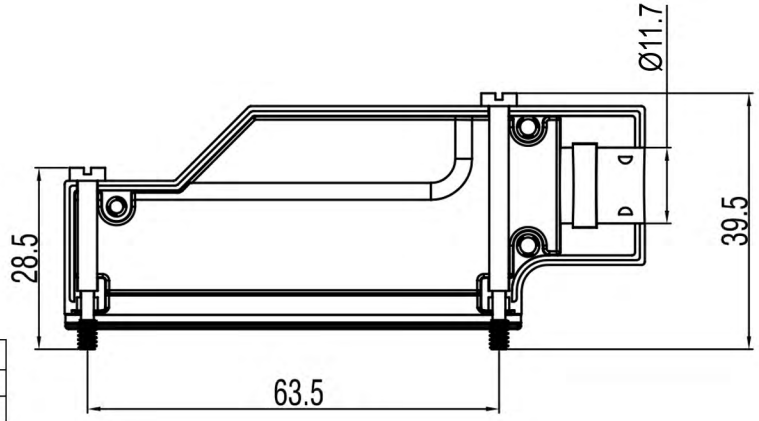


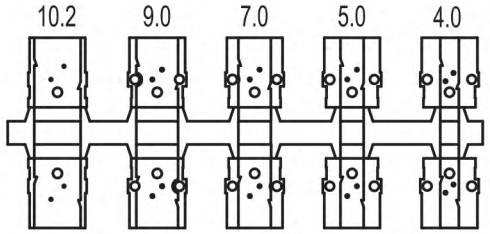


Grommet Set

| Item | QTY | Part description |
|---|---|---|
| 1 | 1 | Upper Cover |
| 2 | 1 | Lower Cover |
| 3 | 3 | CSK M3x12 Screw |
| 4 | 1 | Grommet Set |
| 5 | 1 | Jackscrew UNC4-40x39.5 |
| 6 | 1 | Jackscrew UNC4-40x28.5 |

**RoHS compliant**
**Unit: mm**

| Scale | Free |
|---|---|
| TOLERANCE | |
| 0~6 | ±0.10 |
| 6~30 | ±0.20 |
| 30~120 | ±0.30 |
| 120~400 | ±0.50 |
| DIM | Tol |
| Angle | ±1° |
| Angle | Tol |

| Id. | Modification | Date | Name |
|---|---|---|---|
| 0 | Drawn | 17.08.2017 | S.Bölling |

| | Date | Name |
|---|---|---|
| Drawn | 17.08.2017 | S.Bölling |
| Approved | 17.08.2017 | S.Bölling |

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
ACOV-SUB-37MB39

Drawing-No.
ASS_5280_CO

rev00

Replace

Sheet 4/4

SV4382