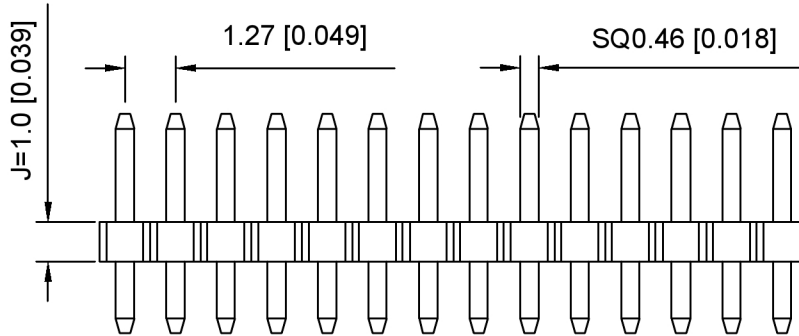
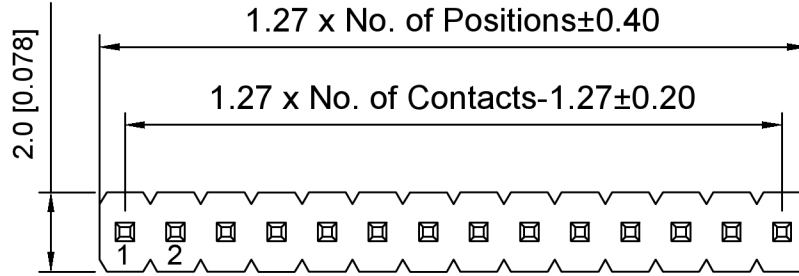


PCB LAYOUT

Specifications:

规格:

Voltage rating: 250V AC/DC

额定电压: 250V AC/DC

Current rating: 1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage: 300V AC/minute

耐受电压: 300V AC/分钟

Temperature range: -40°C~+105°C

温度范围: -40°C~+105°C

Insulation resistance: ≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance: ≤20mΩ

接触电阻: ≤20mΩ

Material: PA6T UL94V-0

材质: PA6T UL94V-0

Plating Category: 1U"Gold

镀层: 1U"Gold

Wave soldering temperature: 255±5°C, 10S

波峰焊温度: 255±5°C, 10S

X1311	W	V - XX	J - C40	D24		
①	②	③	④	⑤	⑥	⑦

1. Series No

2. Category: W-Wafer

3. Welding Board Angle: V-Stright 180°

4. Row No. Pin No: XX Pin

5. Plastic height: J=1.0 mm

6. Pin Length: C=4.0mm

7. Pin Length: D=2.4

X1311WV-XXJ-C40D24	PA6T	Brass	X1311F
PART NO	Material	Material(Pin)	Suitable XKB Female

DSND		SCALE: N/A	MODEL TYPE: 1.27mm BTB Connector
DWN		VIEW:	PART NO.: X1311WV-XXJ-C40D24
CHKD		UNIT: mm/in	DWG NO.: X-X1311WV-XXJ-C40D24
APPD		SIZE: A4	REVISION
XKB INDUSTRIAL PRECISION CO., LIMITED			1/1

XKB

广东星坤科技股份有限公司

日期

文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGULAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn