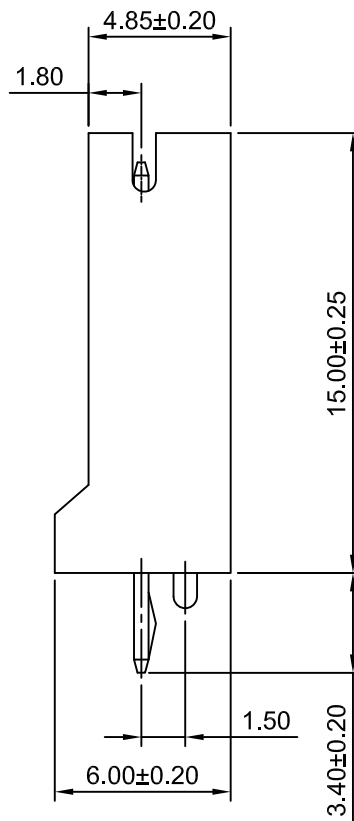
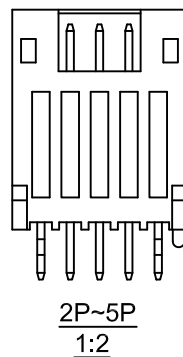
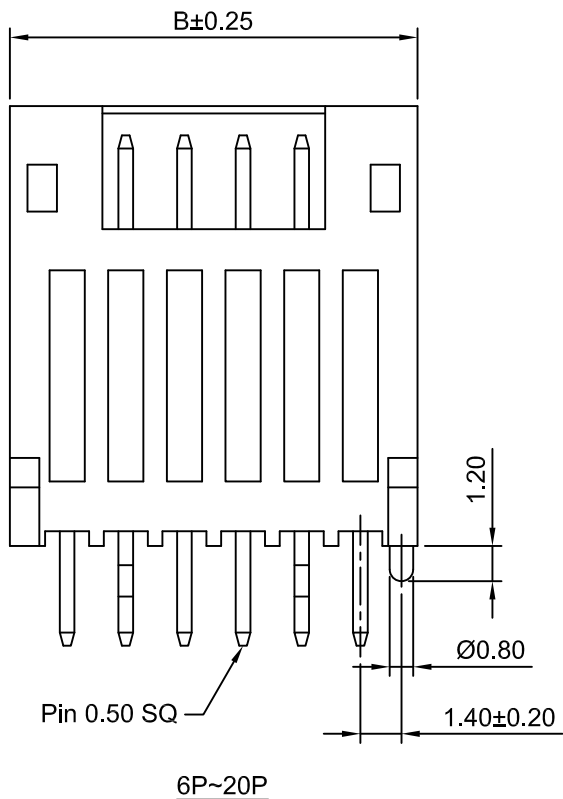
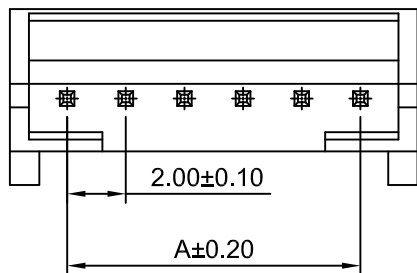


SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating:100V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	5.90	12P	22.00	25.90
3P	4.00	7.90	13P	24.00	27.90
4P	6.00	9.90	14P	26.00	29.90
5P	8.00	11.90	15P	28.00	31.90
6P	10.00	13.90	16P	30.00	33.90
7P	12.00	15.90	17P	32.00	35.90
8P	14.00	17.90	18P	34.00	37.90
9P	16.00	19.90	19P	36.00	39.90
10P	18.00	21.90	20P	38.00	41.90
11P	20.00	23.90			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	4:1	1 of 1	2.00mm PITCH VERTICAL WAFER		
DRAWN	CHK'D	APPR			
Haisen Li	Djankui Wan	Jack Yin	DRAWING NO. A2001WV-F-XP-H		
General Tolerances					REV A1
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION		

A1	CHANGE THE DRAWING	2022.12.22
A0	NEW RELEASE	2020.09.19
REV	DESCRIPTION	DATE