
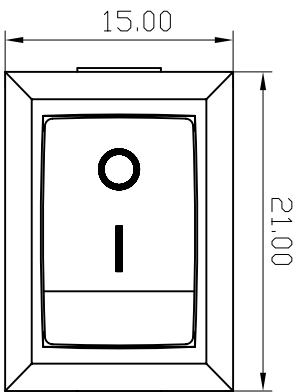


| PANEL CUT-OUT |             |           |
|---------------|-------------|-----------|
| Z             | Y           | X         |
| 0.70~1.25     | 12.90~13.10 | 18.9~19.1 |
| 1.25~2.00     | 12.90~13.10 | 19.1~19.2 |
| 2.00~3.00     | 12.90~13.10 | 19.3~19.4 |

NOTES:

1. Rating:  
CQC 6A 250VAC 6(8)A 250VAC  
8A/128A 250VAC T105/55  
UL CUL 10GPA 125VAC  
6GPA 250VAC T105/55  
VDE ENEC 6(4)A 250VAC T85/55  
KC 6(4)A 250VAC T85/55
2. Circuit Diagram: 2P ON-OFF
3. Terminal Strength:  $\geq 80N$
4. Electrical life:  $\geq 10000$  cycles
5. Withstand Voltage: Withstand Voltage: 1500VAC 1min  
Terminals to Button: 3000VAC 1min
6. Leakage Current: 1mA
7. Current resistance:  $\leq 50m\Omega$  (initial)
8. Insulation resistance:  $\geq 100M\Omega$
9. Body Material: NYLON 66 94V-2~0

SWITCHING CIRCUIT



普通公差:  
COMMON TOLERANCE:

|               |               |
|---------------|---------------|
| UP TO 5       | $\pm 0.20$    |
| ABOVE 5 TO 30 | $\pm 0.30$    |
| ABOVE 30      | $\pm 0.50$    |
| ANGULAR       | $\pm 5^\circ$ |

深圳市华灿天禄电子有限公司

|                |            |                   |     |                    |      |             |                  |
|----------------|------------|-------------------|-----|--------------------|------|-------------|------------------|
| 单位<br>UNIT     | mm         | 投影<br>PROJECTED   | 梁金勇 | 品名<br>PRODUCT NAME | 跷板开关 | 比例<br>SCALE | Free             |
| 绘图<br>DRAWN BY | 周金勇        | 核对<br>CHECKED BY  | 梁金勇 | 型号<br>MODEL NO.    |      |             | RS601            |
| 日期<br>DATE     | 2015.10.15 | 核准<br>APPROVAL BY | 周培雷 | 图号<br>DWG. NO.     |      |             | RS601A-1010011BB |

|      |      |                      |       |
|------|------|----------------------|-------|
| A4   |      |                      |       |
| A3   |      |                      |       |
| A2   |      |                      |       |
| A1   |      |                      |       |
| REV. | DATE | REVISION DESCRIPTION | ISSUE |