

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.9	阿树

Specifications:
规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:1000V AC/minute
耐受电压: 1000V AC/分钟
Temperature range:-40℃-+125℃
温度范围: -40℃-+125℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥1000MΩ
Contact resistance:≤10mΩ
接触电阻: ≤10mΩ
After environmental testing:≤20mΩ
环境测试后: ≤20兆欧

PART NO.:

X2081 H-2xXX-N0
① ② ③ ④

- ①Series No
②Category:H-Housing
③Row No-Pin No:2xXX-2x05P~2x20P
④Material:N0-PA66 94V-0

Poles	Dimension(mm)				Poles	Dimension(mm)			
	A	B	C	D		A	B	C	D
10	12.00	8.00	10.60	5.10	26	28.00	24.00	26.60	6.80
12	14.00	10.00	12.60	6.80	28	30.00	26.00	28.60	6.80
14	16.00	12.00	14.60	6.80	30	32.00	28.00	30.60	6.80
16	18.00	14.00	16.60	6.80	32	34.00	30.00	32.60	6.80
18	20.00	16.00	18.60	6.80	34	36.00	32.00	34.60	6.80
20	22.00	18.00	20.60	6.80	36	38.00	34.00	36.60	6.80
22	24.00	20.00	22.60	6.80	38	40.00	36.00	38.60	6.80
24	26.00	22.00	24.60	6.80	40	42.00	38.00	40.60	6.80

X2081H-2xXX-N0		PA66 UL 94V-0	X2081W	X2081T
PART NO		Material	Suitable XKB Wafer	Suitable XKB Terminal






AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.0mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X2081H-2xXX-N0
APPROVED		SIZE: A4	DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

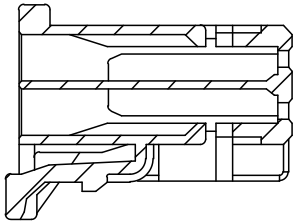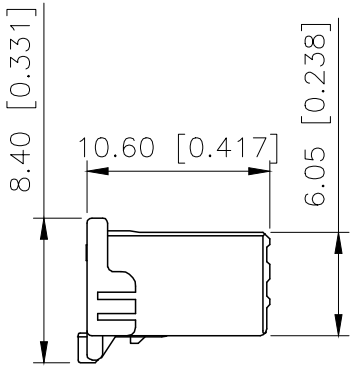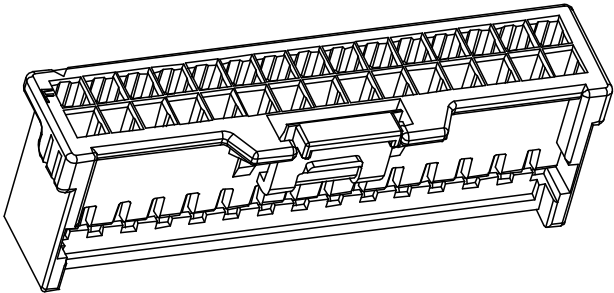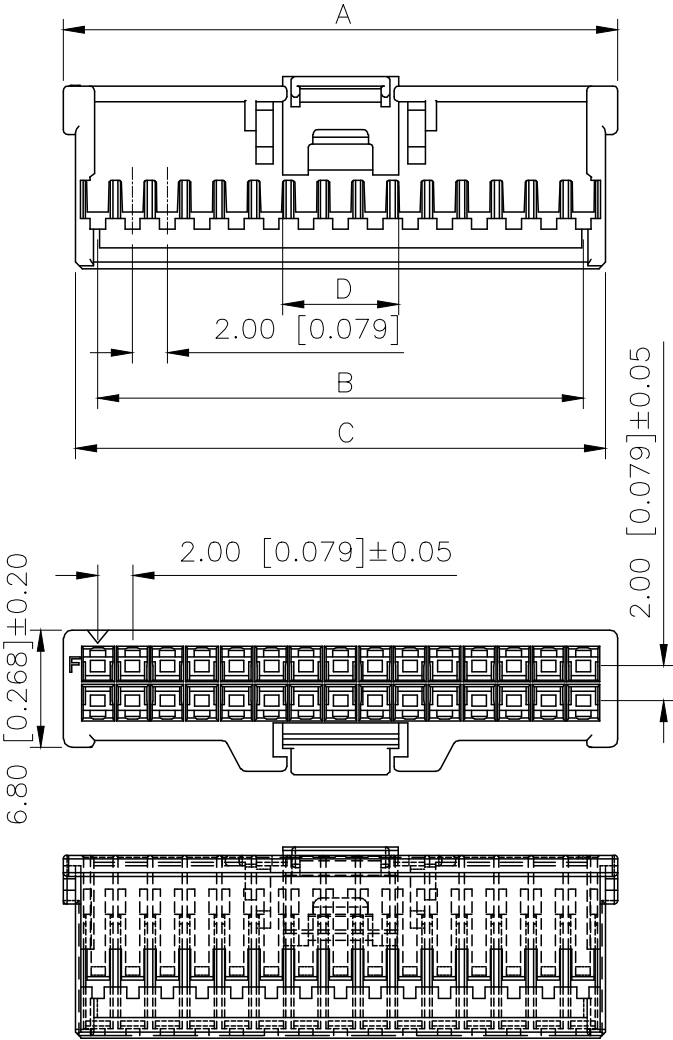

截面 B-B