

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.26	阿树

PART NO.:

X1506 H-XX-PT
① ② ③ ④

- ①Series No
②Category:H-HSG
③Row No.Pin No:XX-02~16Pin
④Material:PT-PBT UL94V-0

Specifications:

规格:

Voltage rating:125V AC/DC

额定电压: 125V AC/DC

Current rating:2A AC/DC

额定电流: 2A AC/DC

Contact Resistance:≤20MΩ







接触电阻: ≤20MΩ

Insulation Resistance:≥200MΩ

绝缘电阻:≥200MΩ

Dielectric strength:800V AC/minutenai

耐压: 800V AC/minute

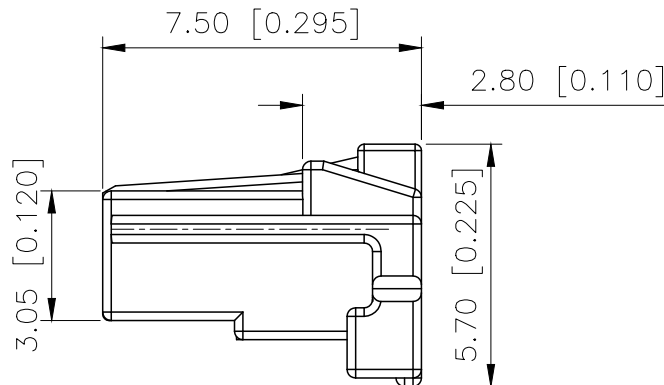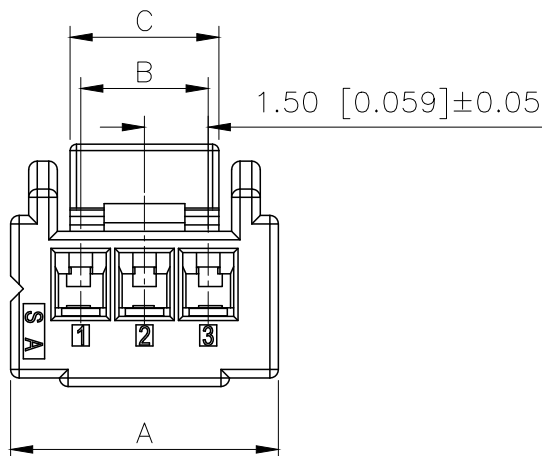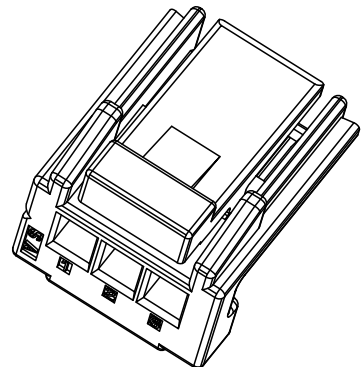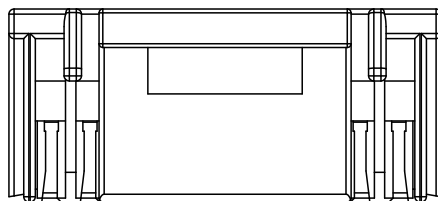

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	5.00	1.50	2.70	10	16.80	13.50	9.80
03	6.30	3.00	3.50	11	18.30	15.00	
04	7.80	4.50	4.50	12	19.80	16.50	11.30
05	9.30	6.00		13	21.30	18.00	
06	10.80	7.50	7.50	14	22.80	19.50	
07	12.30	9.00		15	24.30	21.00	
08	13.80	10.50	9.80	16	25.80	22.50	
09	15.30	12.00					

X1506H-XX-PT	PBT UL 94V-0	X1506W	Tin-Plated	X1506T
PART NO	Material	Material(pin)	Finish(Pin)	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 1.50mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X1506H-XX-PT
APPROVED		SIZE:	A4	DWG NO.: