

MMBT3906WH

PNP TRANSISTOR

FEATURES


- As complementary type, the NPN transistor MMBT3904WH is Recommended
- Epitaxial planar die construction

PINNING

PIN	DESCRIPTION
1 / 4	EMITTER
2 / 5	BASE
3 / 6	COLLECTOR

MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector–Base Voltage	V_{CBO}	-40	V
Collector–Emitter Voltage	V_{CEO}	-40	V
Emitter–Base Voltage	V_{EBO}	-5	V
Collector Current — Continuous	I_C	-0.2	A
Collector Dissipation	P_C	0.2	W
Thermal Resistance From Junction To Ambient	R_{thJA}	625	°C/W
Operation Junction and Storage Temperature Range	T_J, T_{stg}	-55~+150	°C








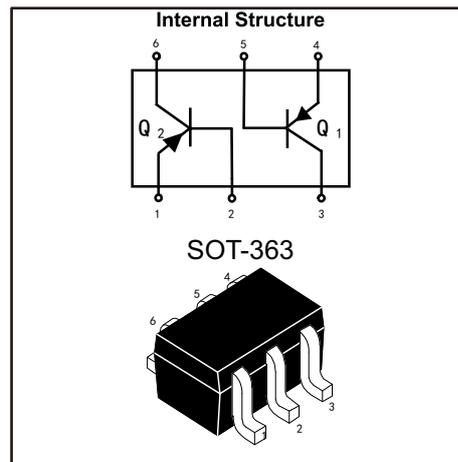


ELECTRICAL CHARACTERISTICS (TA = 25°C unless otherwise noted.)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -10\mu A, I_E = 0$	-40		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -1\text{ mA}, I_B = 0$	-40		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -10\mu A, I_C = 0$	-5		V
Collector cut-off current	I_{CBO}	$V_{CB} = -40V, I_E = 0$		-100	nA
Collector cut-off current	I_{CEX}	$V_{CE} = -30V, V_{EB} = -3V$		-50	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5V, I_C = 0$		-100	nA
DC current gain	h_{FE1}	$V_{CE} = -1V, I_C = -10\text{mA}$	100	300	
	h_{FE2}	$V_{CE} = -1V, I_C = -50\text{mA}$	60		
	h_{FE3}	$V_{CE} = -2V, I_C = -100\text{mA}$	30		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -50\text{mA}, I_B = -5\text{mA}$		-0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -50\text{mA}, I_B = -5\text{mA}$		-0.95	V
Transition frequency	f_T	$V_{CE} = -20V, I_C = -10\text{mA}, f = 100\text{MHz}$	300		MHZ
Delay time	t_d	$V_{CC} = -3V, V_{BE} = -0.5V$ $I_C = -10\text{mA}, I_{B1} = I_{B2} = -1\text{mA}$		35	ns
Rise time	t_r			35	ns
Storage time	t_s	$V_{CC} = -3V, I_C = -10\text{mA}$ $I_{B1} = I_{B2} = -1\text{mA}$		225	ns
Fall time	t_f			75	ns




TYPICAL CHARACTERISTICS

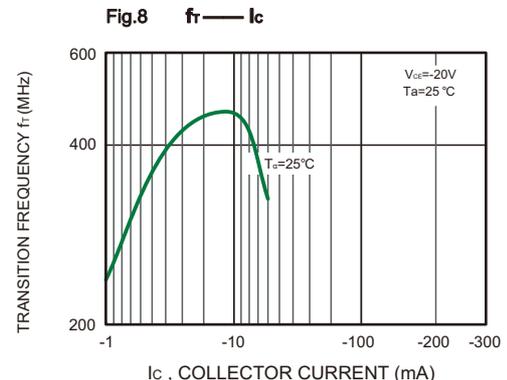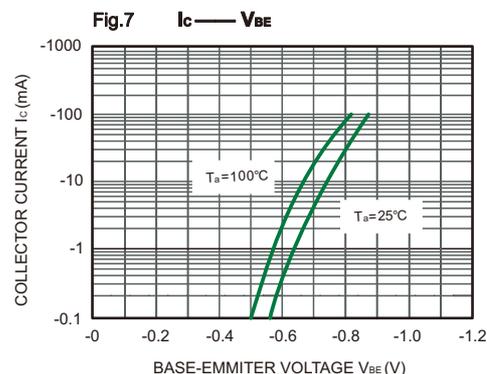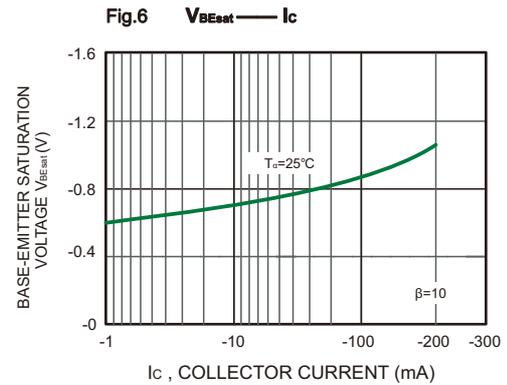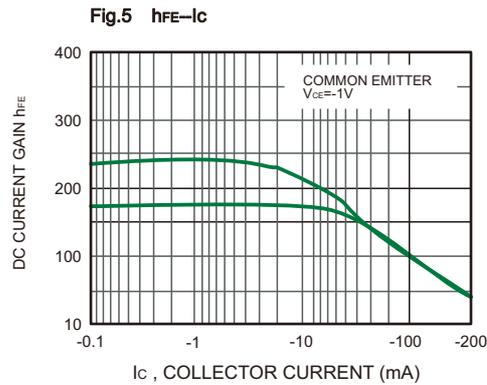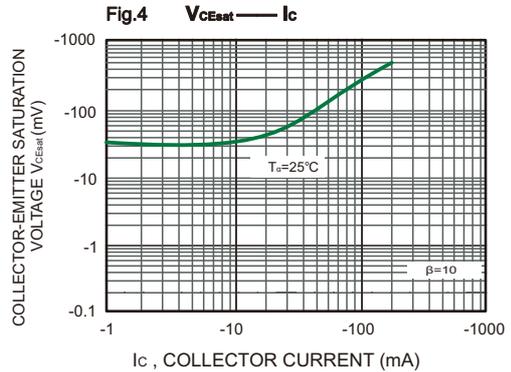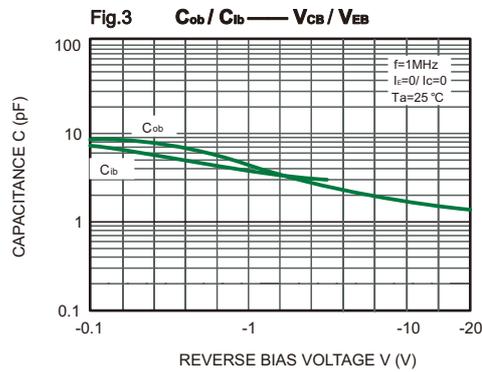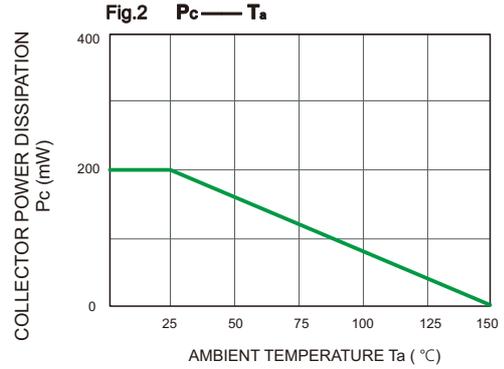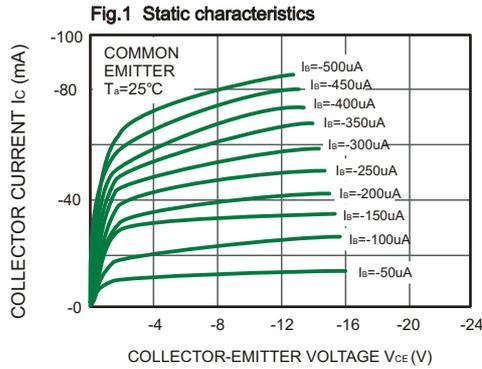




SOT-363 Package Outline Dimensions

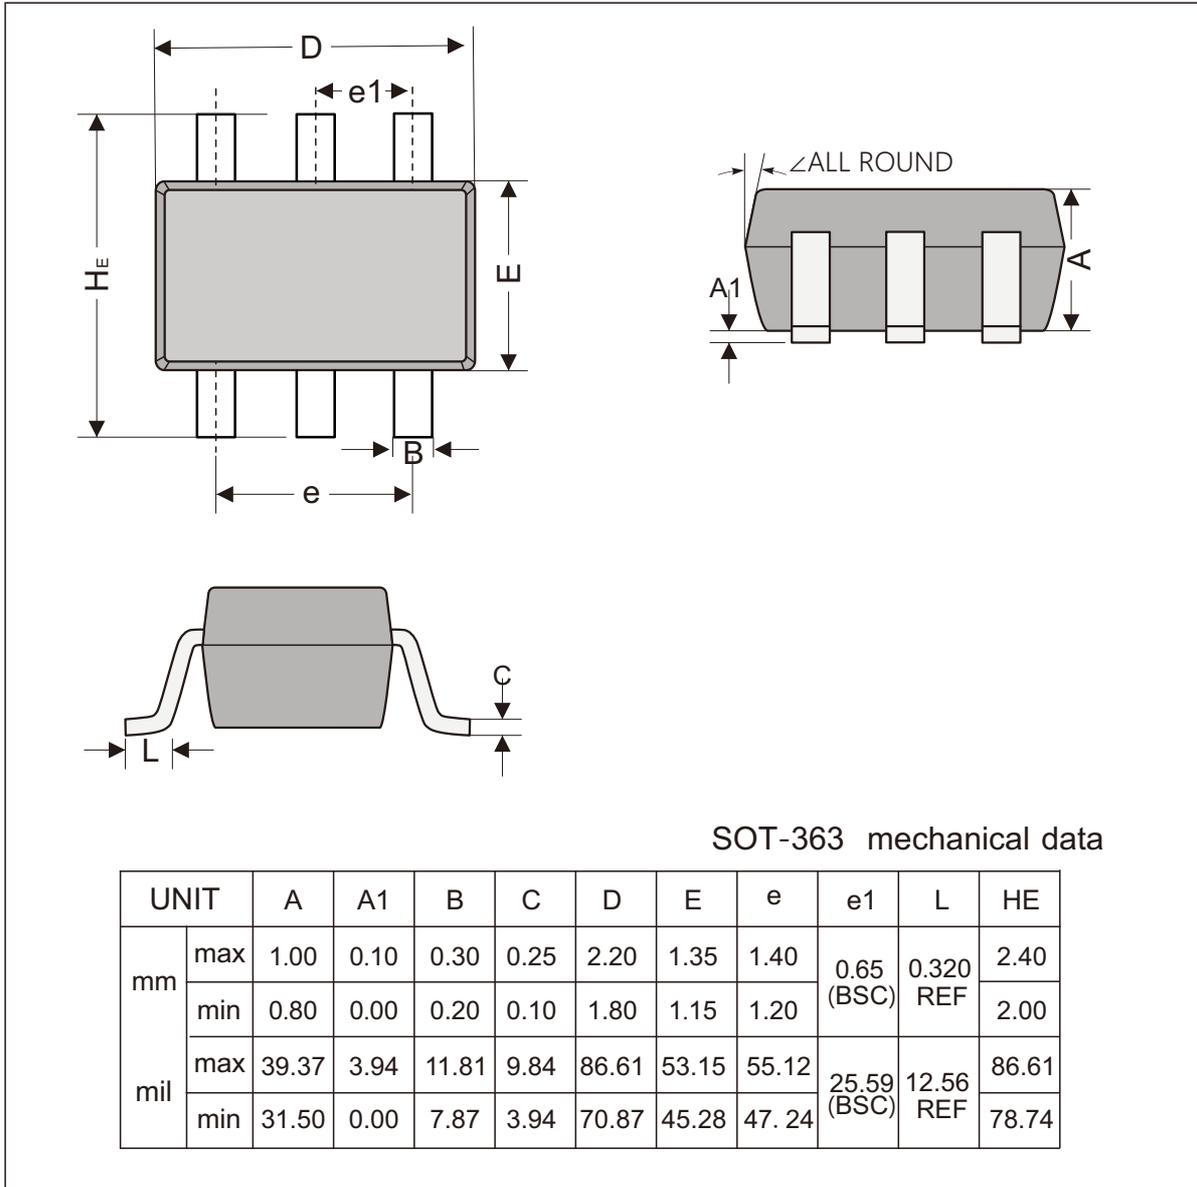

The recommended mounting pad size Marking

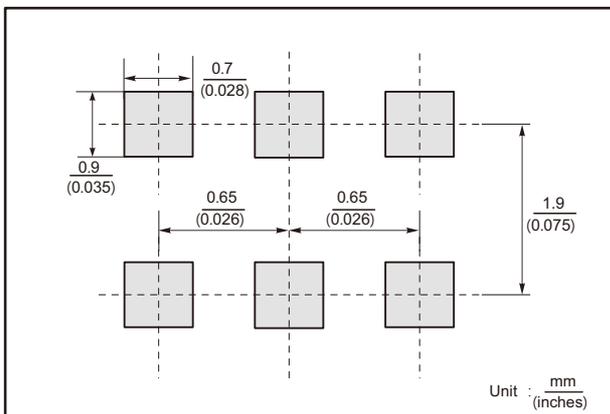

Marking

Type number	Marking code
MMBT3906WH	2A



Important Notice and Disclaimer

Jingdao Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Jingdao Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Jingdao Microelectronics assume any liability for application assistance or customer product design.

Jingdao Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Jingdao Microelectronics.

Jingdao Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of Jingdao Microelectronics.