


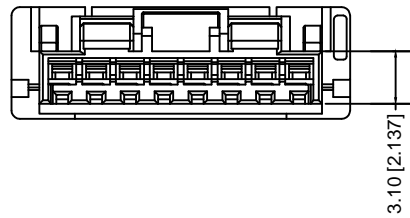
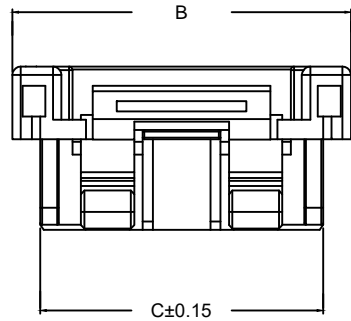



XKB



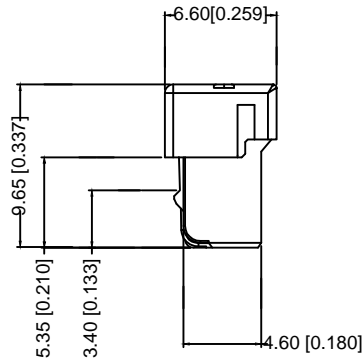


Specifications:  
 规格:  
 Voltage rating:250V AC/DC  
 额定电压: 250V AC/DC  
 Current rating:3A AC/DC  
 额定电流: 3A AC/DC  
 Withstanding voltage:800V AC/minute  
 耐受电压: 800V AC/分钟  
 Temperature range:-40℃~+105℃  
 温度范围: -40℃~+105℃  
 Insulation resistance:≥1000MΩ  
 绝缘电阻: ≥1000MΩ  
 Contact resistance:≤20mΩ  
 接触电阻: ≤20mΩ  
 After environmental testing:≤40mΩ  
 环境测试后: ≤40兆欧

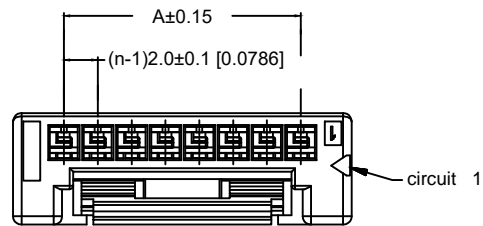

X2023 H -XX -N0

- ⊙ Series No.
- ⊙ Category:H-HSG
- ⊙ Row No.Pin No.: XX-02P-15P;
- ⊙ Material:N0 -PA66 94V-0


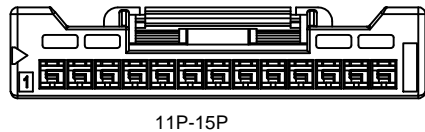


Poles	Dimension mm			Poles	Dimension mm		
	A	B	C		A	B	C
2	2.00	8.00	4.70	09	16.00	22.00	18.70
3	4.00	10.00	6.70	10	18.00	24.00	20.70
4	6.00	12.00	8.70	11	20.00	26.00	22.70
5	8.00	14.00	10.70	12	22.00	28.00	24.70
6	10.00	16.00	12.70	13	24.00	30.00	26.70
7	12.00	18.00	14.70	14	26.00	32.00	28.70
8	14.00	20.00	16.70	15	28.00	34.00	30.70

11P-15P

8P-15P

2P-4P



5P-15P

2P-4P

X2023H-XX -N0	PA66 UL 94V-0	X2023T	X2023W
PART N0	Material	Suitale XKB Terminal	Suitale XKB Terminal

XKB

DSND	DATE	SCALE: N/A	MODEL TYPE: X2023H-XX-N0		
DWN	DATE	VIEW:	PART NO.: 2.0 mm Crimp Style Connectors		
CHKD	DATE	UNIT: mm/in	DWG NO.:		
APPD	DATE	SIZE: A4			
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δ X				XKB	ANGLAR ±5°
Δ X					L ≤ 4 ±0.2
Δ X					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5
REVISIONS					
www.helloxkb.com					