

Stop switch

84-6240.0020

Distribution by
DigiKey

DigiKey



<https://digikey.eao.com/p/84-6240.0020>

Your product:



84-6240.0020

Stop switch

FRONT

Front dimension: Ø 32 mm

Front form: round

MOUNTING

Mounting cut-out: Ø 22.3 mm

OPERATING-/INDICATION PART

Lens: round

Lens colour: Grey

Lens illumination: non illuminative

Lens optics: opaque

Switching position ring: Black

Illumination colour: none

Lens material: Plastic

Lens shape: mushroom-head

ELECTRICAL CHARACTERISTICS

Rated Operational Voltage U_e: 250 VAC/DC according to EN IEC 60947-1

Overvoltage category: II, according to EN / IEC 61058-1

Rated short-circuit current caused: 1 000 A, type of short-circuit device 6 A gG (EN 60947-5-1)

Switching voltage and switching current:

Switch rating AC with silver contact (gold plated)		
Service category AC-15 as per EN IEC 60947-5-1		
Voltage	120 VAC	240 VAC
Current	3 A	1,5 A
Switch rating AC with silver contact (gold plated)		
Service category DC-13 as per EN IEC 60947-5-1		
NO contacts	NC contacts	NO/NC contacts
(48 VA)	(60 VA)	
12 VDC/2.0 A	12 VDC/2.5 A	125 VDC/0.22 A
24 VDC/2.0 A	24 VDC/2.5 A	250 VDC/0.11 A
48 VDC/1.0 A	48 VDC/1.25 A	
60 VDC/0.8 A	60 VDC/1.0 A	

Electric strength:	500 VAC, 50 Hz, 1 minute according to DIN IEC 60512-2
Thermal current I_{th}:	5 A
Protection class:	II, according to EN / IEC 60947-5
Contacts:	2 NC
Rated impulse withstand voltage U_{imp}:	2.5 kV, according to EN / IEC 60947-1
Electrical lifetime:	50 000 cycles of operation
Rated insulation voltage U_i:	250 V according to EN / IEC 60947-1
Standards:	According to EN 60947-5-1, EN 60947-5-5, DIN EN ISO 13850, EN IEC 60204
Pollution degree:	3, according to EN IEC 60947-1

MECHANICAL CHARATERISTIC

Weight:	0.028 kg
Switching system:	Slow-make switching element
Mechanical lifetime:	250 000 cycles of operation
Switching action:	Maintained
Terminal:	Plug-in terminal, 2.8 x 0.5 mm
Contact material:	Gold
Release type:	Twist to unlock
Operating force:	17 N ± 4 N
Operating Travel:	ca. 4 mm
Tightening torque:	Fixing nut 0.8 Nm

AMBIENT CONDITION

Shock resistance:	Max. 150 m / s ² , pulse width 11 ms, 3-axis, (semi-sinusoidal as per EN IEC 60068-2-27)
Storage temperature:	– 25 °C ... + 85 °C


IP Protection:	IP20 rear side
Vibration resistance:	Max. 50 m / s ² from 10 Hz ... 500 Hz, 10 cycles, 3-axis (sinusoidal EN IEC 60068-2-6)
Climate resistance:	Damp heat, cyclic: 96 hours, + 25 °C/97 %, + 55 °C/93 % relative humidity, as per EN IEC 60068-2-30 Damp heat, steady: 56 days, + 40 °C/93 % relative humidity, according to EN IEC 60068-2-78 Dry heat: 96 hours, + 65 °C, as per EN IEC 60068-2-2 Low temperature: 96 hours, – 25 °C (as per EN IEC 60068-2-1)) UV test, 56 days (EN 60068-2-5:1999) Saline mist: 96 hours, + 35 °C in chemical solution NaCl, as per EN IEC 60068-2-11
Operating temperature:	– 25 °C ... + 70 °C
IP front protection:	IP65, according to DIN EN 60529

CERTIFICATE


Conformities:	CE, UKCA, 2006 / 42 / EC (MD), 2011 / 65 / EC (RoHS)
Approbations:	CCC, UL

OTHER


Short Description:	Stop switch, Ø 22.3 mm, Ø 32 mm, mushroom-head, non illuminative, Grey, Plastic, opaque, round, 2 NC, Maintained, Plug-in terminal, 2.8 x 0.5 mm, IP65, according to DIN EN 60529, Twist to unlock, none
Housing colour:	Grey
Hints:	Position indication ring black, Twist to unlock clockwise
Housing material:	Plastic
Material:	Plastic
Component layouts:	

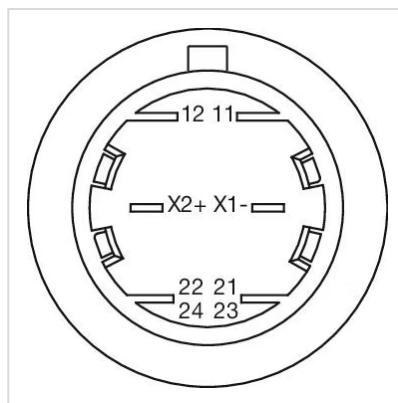

Wiring diagrams:

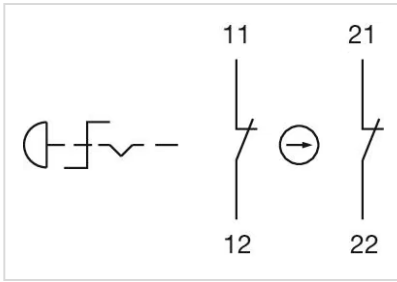

Mounting cut-outs:

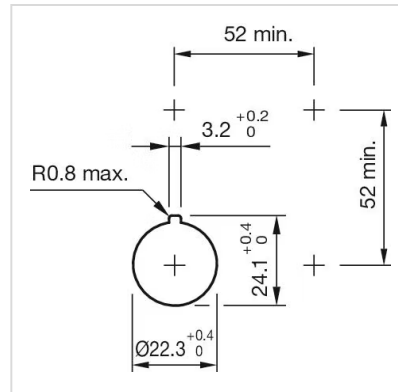

Dimension drawings:

