


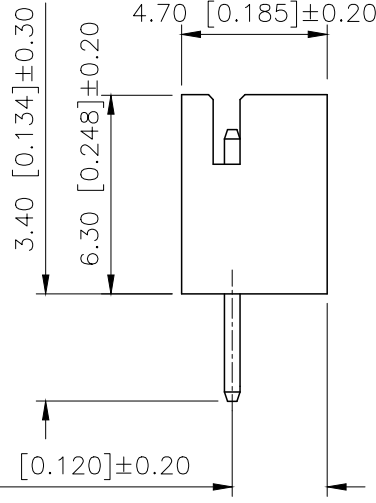
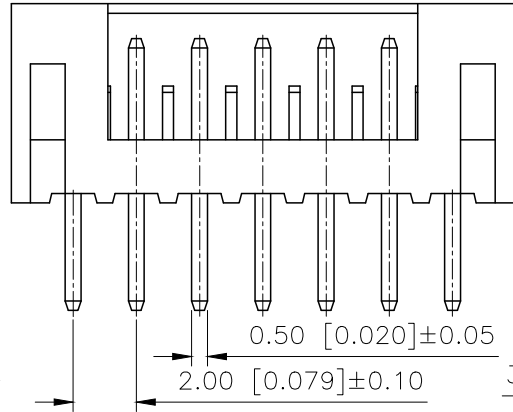


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.11.11	阿树



3D图示(参考)

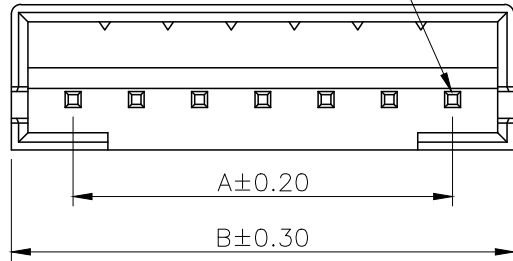

PART NO.:

X2016 W V-XX K-NO SN
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
- ② Category: W-Wafer
- ③ Welding Board Angle: V-Straight 180°
- ④ Row No. Pin No: XX-02~20Pin
- ⑤ Plug the Pin & Special No.:
K-Kink; K1-Reverse Kink
- ⑥ Material: NO-PA66 UL 94V-0
- ⑦ Plating Category: SN-Bright tin Plating
V01-Gold Flash



Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.00	6.10	12	22.00	26.10
03	4.00	8.10	13	24.00	28.10
04	6.00	10.10	14	26.00	30.10
05	8.00	12.10	15	28.00	32.10
06	10.00	14.10	16	30.00	34.10
07	12.00	16.10	17	32.00	36.10
08	14.00	18.10	18	34.00	38.10
09	16.00	20.10	19	36.00	40.10
10	18.00	22.10	20	38.00	42.10
11	20.00	24.10			

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 2A AC/DC
- Withstanding Voltage: 800V AC/minute
- Temperature range: -40°C~+125°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environment testing: ≤30mΩ

Optional Kink
Kink(k)

可定制打点样式
2~5A位置在两边第1针
6~nA位置在两边第2针

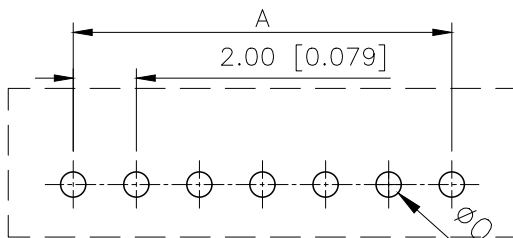

Reverse Kink(k)

X2016WV-XXK-NOV01	Nylon 66 UL 94V-0	Brass	Gold-Flash	X2016H
X2016WV-XXK-NOSN			Tin-Plated	
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE:	2.00mm Crimp Style Connectors
PART NO.:	X2016WV-XXK-NOXX
DWG NO.:	