
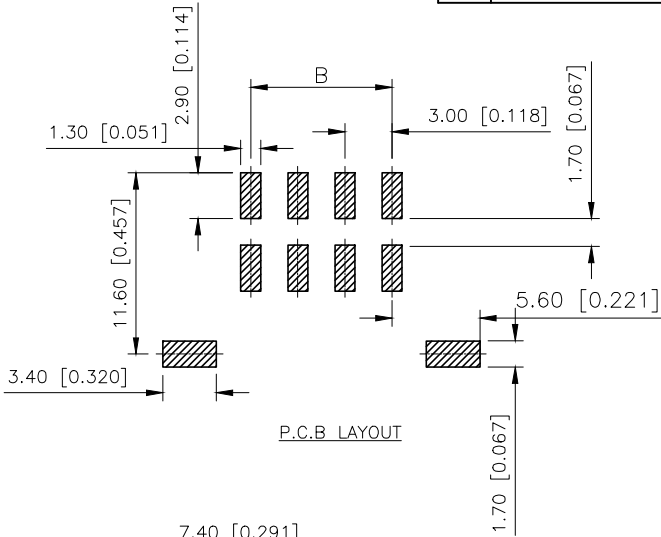


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.07.20	阿 树

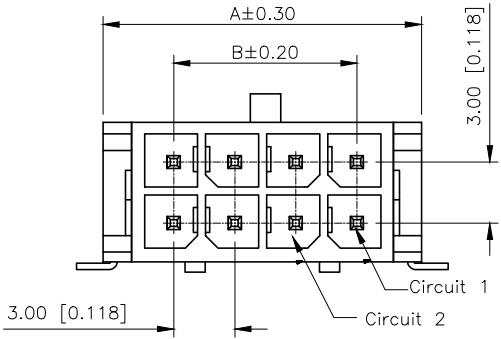

P.C.B LAYOUT



■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:5A AC/DC
- Withstanding Voltage:1000V AC/minute
- Temperature range:-45°C+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ
- After environmental testing: ≤20mΩ

PART NO.:

X3025 W R S-2xXX D-LP SW XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Straight 90°
④Welding Way: S-SMT
⑤Row No.Pin No:2xXX-2x01~2x12Pin
⑥Plug the Pin&Special NO:D-With Solder Tabs
⑦Material:LP-LCP L94V-0
⑧Planting: SN-Bright tin plating
G05-Contact Gold 5u"
SW-Fog Tin plating
⑨Color:Blank-Natural Color

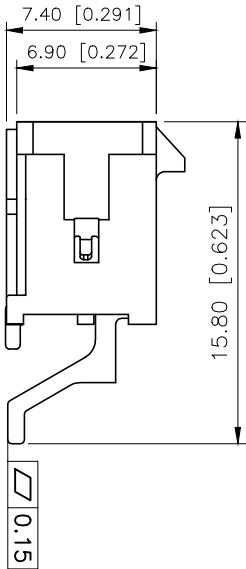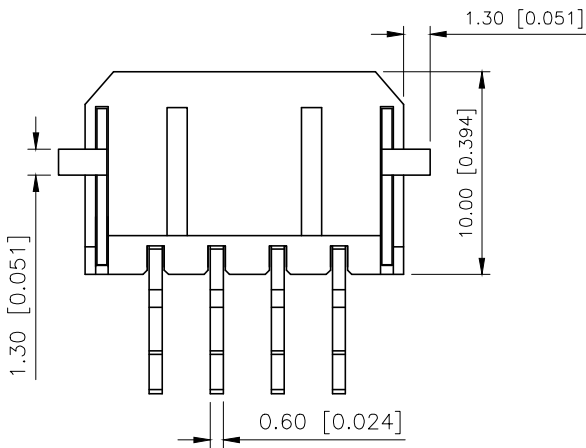

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2x01	6.65	---	2x07	24.65	18.00
2x02	9.65	3.00	2x08	27.65	21.00
2x03	12.65	6.00	2x09	30.65	24.00
2x04	15.65	9.00	2x10	33.65	27.00
2x05	18.65	12.00	2x11	36.65	30.00
2x06	21.65	15.00	2x12	39.65	33.00

X3025WRS-2xXXD-LPSW	LCP UL 94V-0	Brass	Matte Tin Plating	Brass	Tin Plated	X3025H
X3025WRS-2xXXD-LPG05			Ni:50u"Min;Sn:120u"Min; Contact Area Gold:5u"Min			
X3025WRS-2xXXD-LPSN			Tin-Plated			
PART NO	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿 树	VIEW:	MODEL TYPE: 3.00 mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X3025WRS-2xXXD-LPXXX
APPROVED		SIZE: A4	DWG NO.: