
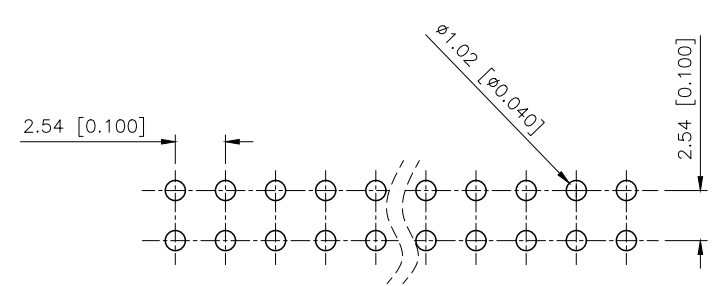
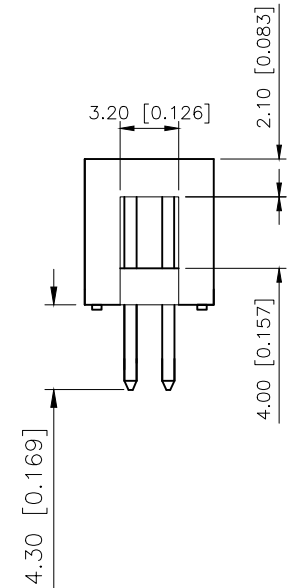
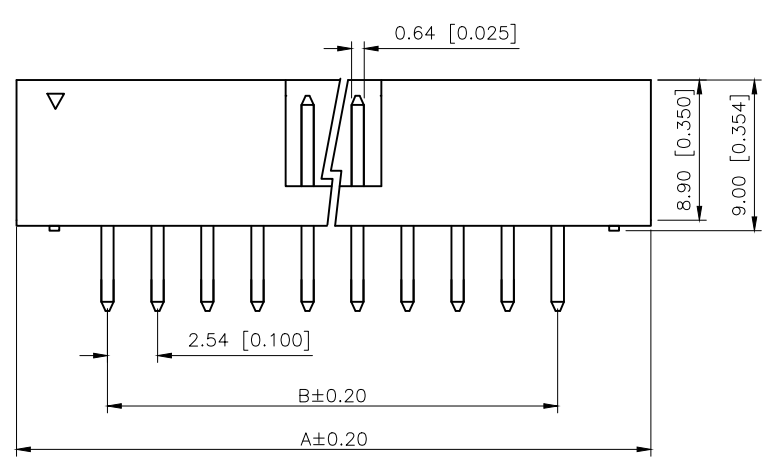


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.03.08	阿树

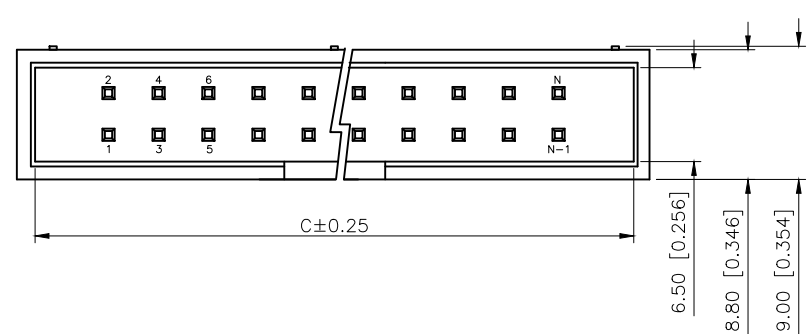

PCB LAYOUT

Specifications:

规格:
Voltage rating:250V AC/DC
额定电压: 250V AC/DC
Current rating:3A AC/DC
额定电流: 3A AC/DC
Withstanding voltage:600V AC/minute
耐受电压: 600V AC/分钟
Temperature range:-40℃-+125℃
温度范围: -40℃-+125℃
Insulation resistance:1000MΩ min
绝缘电阻: 1000MΩ Min
Contact resistance:20mΩ Max
接触电阻: 20mΩ Max

PART NO.:

X9555 W V-2xXX-6T V01
① ② ③ ④ ⑤ ⑥

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:V-Stright 180°
- ④Row No.Pin No:2xXX-2x05~2x32P
- ⑤Material:6T-PA6T;
- ⑥Plating:V01-Gold Flash;

poles	Dimensions(mm)			poles	Dimensions(mm)		
	A	B	C		A	B	C
2x03	15.24	5.08	12.94	2x14	43.18	33.02	40.88
2x04	17.78	7.62	15.48	2x15	45.72	35.56	43.42
2x05	20.32	10.16	18.02	2x16	48.26	38.10	45.96
2x06	22.86	12.70	20.56	2x17	50.80	40.64	48.50
2x07	25.40	15.24	23.10	2x18	53.34	43.18	51.04
2x08	27.94	17.78	25.64	2x20	58.42	48.26	56.12
2x09	30.48	20.32	28.18	2x22	63.50	53.34	61.20
2x10	33.02	22.86	30.72	2x25	71.12	60.86	68.82
2x11	35.56	25.40	33.26	2x30	83.82	73.70	81.52
2x12	38.10	27.94	35.80	2x32	88.90	78.74	86.60
2x13	40.64	30.48	38.34				

X9555WV-2xXX-6TV01	PA6T UL 94V-0	Brass	Gold-Flash	X9555H1-2xXXX
				X9555H2-2xXXX
				X9555H3-2xXXX
				X9555H4-2xXXX
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB IDC

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.54mm Jane cattle 简牛
CHECKED		UNIT:	mm/in	PART NO.:	X9555WV-2xXX-6TV01
APPROVED		SIZE:	A4	DWG NO.:	